SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R805 (AMD Opteron 2427, 2.20 GHz)

SPECint®_rate2006 = 182

SPECint_rate_base2006 = 144

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2009
Hardware Availability: Jul-2009
Software Availability: Apr-2009

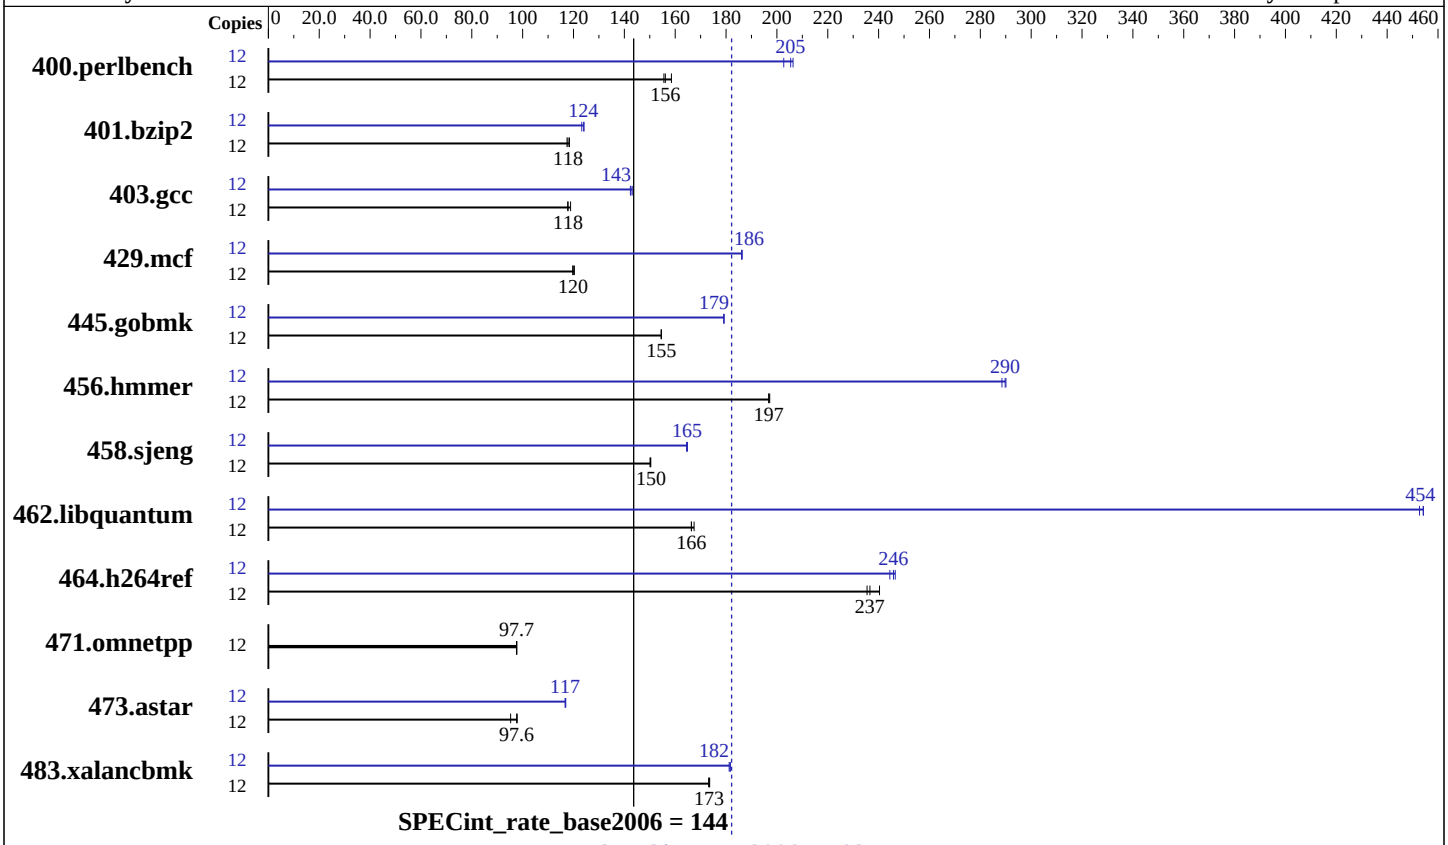

Hardware

CPU Name:	AMD Opteron 2427
CPU Characteristics:	
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (8 x 4 GB DDR2-800)
Disk Subsystem:	1 x 73 GB 15000 RPM SAS
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
Compiler:	PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	binutils 2.18 SmartHeap 8.1 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R805 (AMD Opteron 2427, 2.20 GHz)

SPECint_rate2006 = 182

SPECint_rate_base2006 = 144

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2009
Hardware Availability: Jul-2009
Software Availability: Apr-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	740	159	754	156	**751**	**156**	12	578	203	568	206	**571**	**205**
401.bzip2	12	978	118	**983**	**118**	986	117	12	940	123	**934**	**124**	933	124
403.gcc	12	813	119	**820**	**118**	821	118	12	675	143	679	142	**678**	**143**
429.mcf	12	914	120	909	120	**913**	**120**	12	588	186	587	186	**588**	**186**
445.gobmk	12	815	155	**814**	**155**	814	155	12	703	179	702	179	**703**	**179**
456.hmmer	12	568	197	**569**	**197**	569	197	12	388	289	386	290	**386**	**290**
458.sjeng	12	967	150	965	150	**967**	**150**	12	883	164	**881**	**165**	881	165
462.libquantum	12	1485	167	1495	166	**1494**	**166**	12	547	454	**547**	**454**	549	453
464.h264ref	12	1105	240	**1122**	**237**	1128	235	12	1086	244	1077	247	**1080**	**246**
471.omnetpp	12	**768**	**97.7**	768	97.7	769	97.6	12	**768**	**97.7**	768	97.7	769	97.6
473.astar	12	861	97.9	**863**	**97.6**	884	95.3	12	720	117	722	117	**721**	**117**
483.xalancbmk	12	**477**	**173**	477	174	478	173	12	456	182	457	181	**456**	**182**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 'numactl' was used to bind copies to the cores.
 See the configuration file for details.
```

Operating System Notes

```
 'ulimit -s unlimited' was used to set environment stack size
 'ulimit -l 2097152'  was used to set environment locked pages in memory limit

 Set vm/nr_hugepages=5400 in /etc/sysctl.conf
 mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd0905is-libs/64:/root/cpu2006-1.1/amd0905is-libs/32"
PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64
```

Base Compiler Invocation

C benchmarks:
`opencc`

C++ benchmarks:
`openCC`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-march=barcelona -Ofast -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m`

C++ benchmarks:
`-march=barcelona -Ofast -m32 -INLINE:aggressive=on`
`-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap`

Peak Compiler Invocation

C benchmarks (except as noted below):
`opencc`

456.hmmer: `pgcc`

C++ benchmarks (except as noted below):
`openCC`

473.astar: `pgcpp`

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-CG:local_sched_alg=1 -CG:unroll_fb_req=on
-HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
-OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
-INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnow
-HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
-HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
-LNO:ignore_feedback=off -CG:p2align=on
-CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge
-Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
-Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
-IPA:pu_reorder=2 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

462.libquantum: -march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off
-CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:6(pass 2) -fastsse -O4 -Msmartalloc=huge
-Msafeptr=global -Mfprelaxed --zc_eh -tp shanghai-32
-Bstatic_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Other Flags

C benchmarks:

456.hmmer: -Mipa=jobs:4

C++ benchmarks:

473.astar: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.html
http://www.spec.org/cpu2006/flags/amd-platform.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.xml
http://www.spec.org/cpu2006/flags/amd-platform.xml

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R805 (AMD Opteron 2427, 2.20 GHz)

SPECint_rate2006 = 182

SPECint_rate_base2006 = 144

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jun-2009
Hardware Availability: Jul-2009
Software Availability: Apr-2009

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 02:34:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 July 2009.