SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

NTT Tytan S29 series (Intel Xeon E5520)

SPECint®_rate2006 = 191

SPECint_rate_base2006 = 179

CPU2006 license: 9013
Test sponsor: NTT System S. A.
Tested by: NTT System S. A.

Test date: Jun-2009
Hardware Availability: May-2009
Software Availability: Nov-2008

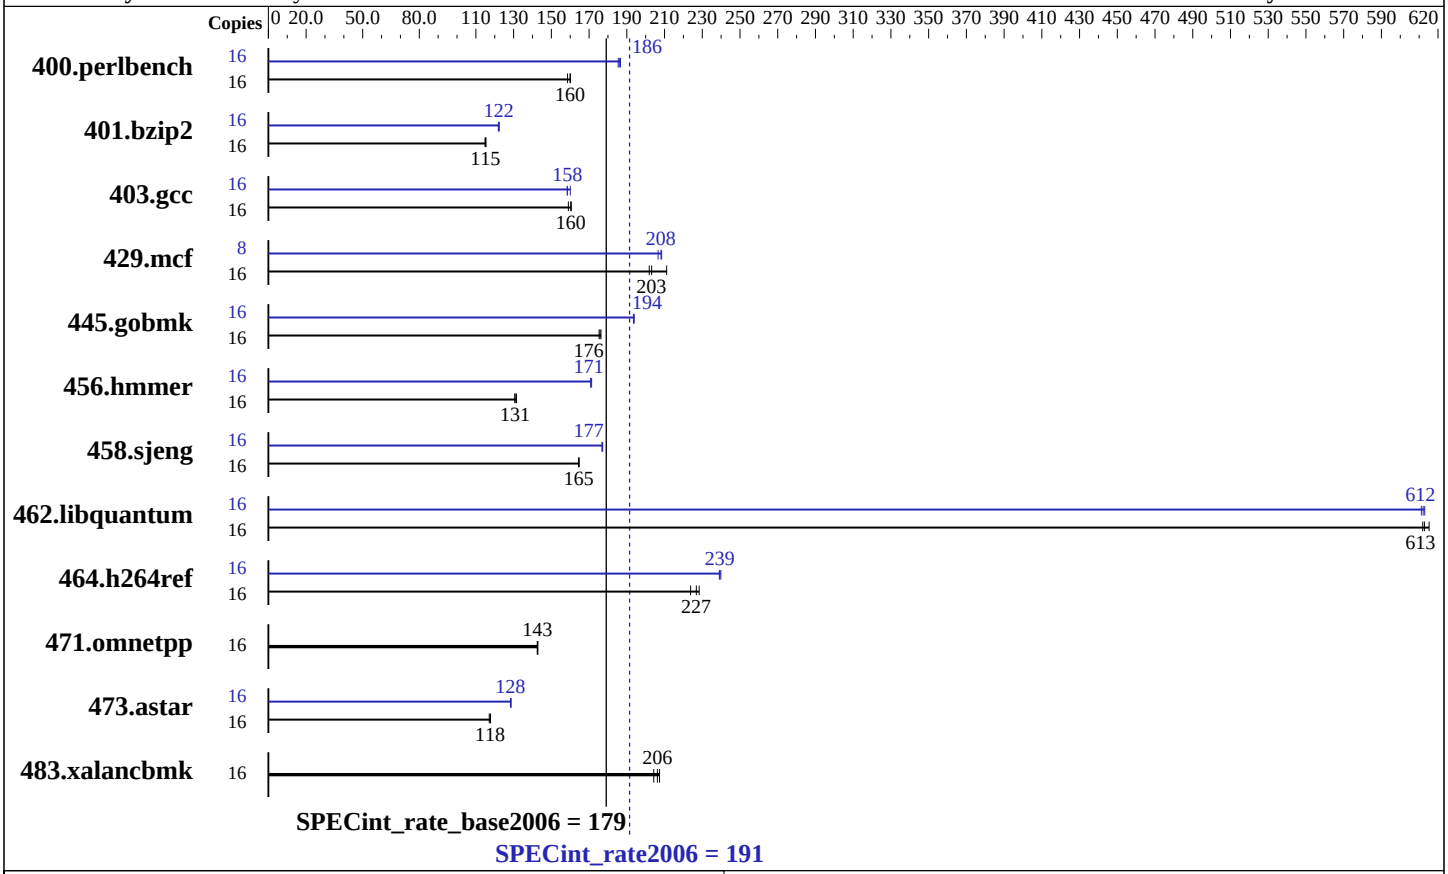

Hardware

CPU Name:	Intel Xeon E5520
CPU Characteristics:	Intel Turbo Boost Technology up to 2.53 GHz
CPU MHz:	2267
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	24 GB (6 x 4 GB 1333 MHz ECC Registered running at 1066MHz)
Disk Subsystem:	147 GB SAS, 10000 RPM
Other Hardware:	None

Software

Operating System:	SuSe Linux Enterprise Server 10 (x86_64) SP2, kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

NTT Tytan S29 series (Intel Xeon E5520)

SPECint_rate2006 = 191

SPECint_rate_base2006 = 179

CPU2006 license: 9013
Test sponsor: NTT System S. A.
Tested by: NTT System S. A.

Test date: Jun-2009
Hardware Availability: May-2009
Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	986	159	976	160	**978**	**160**	16	843	185	**840**	**186**	838	187
401.bzip2	16	**1342**	**115**	1339	115	1344	115	16	1267	122	**1265**	**122**	1261	122
403.gcc	16	**804**	**160**	802	161	810	159	16	805	160	**813**	**158**	813	158
429.mcf	16	**718**	**203**	723	202	691	211	8	350	208	353	207	**351**	**208**
445.gobmk	16	952	176	**955**	**176**	957	175	16	866	194	**866**	**194**	867	194
456.hmmer	16	1143	131	1135	132	**1141**	**131**	16	**873**	**171**	873	171	871	171
458.sjeng	16	**1177**	**165**	1177	164	1175	165	16	1095	177	1093	177	**1094**	**177**
462.libquantum	16	**541**	**613**	542	612	539	615	16	542	611	541	613	**542**	**612**
464.h264ref	16	1551	228	**1561**	**227**	1582	224	16	**1480**	**239**	1476	240	1481	239
471.omnetpp	16	702	143	700	143	**701**	**143**	16	702	143	700	143	**701**	**143**
473.astar	16	**956**	**118**	954	118	959	117	16	873	129	875	128	**875**	**128**
483.xalancbmk	16	532	207	**535**	**206**	540	204	16	532	207	**535**	**206**	540	204

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

General Notes

```
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M
```

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3 -opt-prefetch`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc`

401.bzip2: `/opt/intel/Compiler/11.0/066/bin/intel64/icc`

456.hmmer: `/opt/intel/Compiler/11.0/066/bin/intel64/icc`

C++ benchmarks:
`icpc`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-ansi-alias -opt-prefetch`

Continued on next page

Peak Optimization Flags (Continued)

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090825.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090825.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 02:30:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 August 2009.