SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2970 (AMD Opteron 2423 HE, 2.00 GHz)

SPECint®_rate2006 = 171

SPECint_rate_base2006 = 135

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2009
Hardware Availability: Aug-2009
Software Availability: Apr-2009

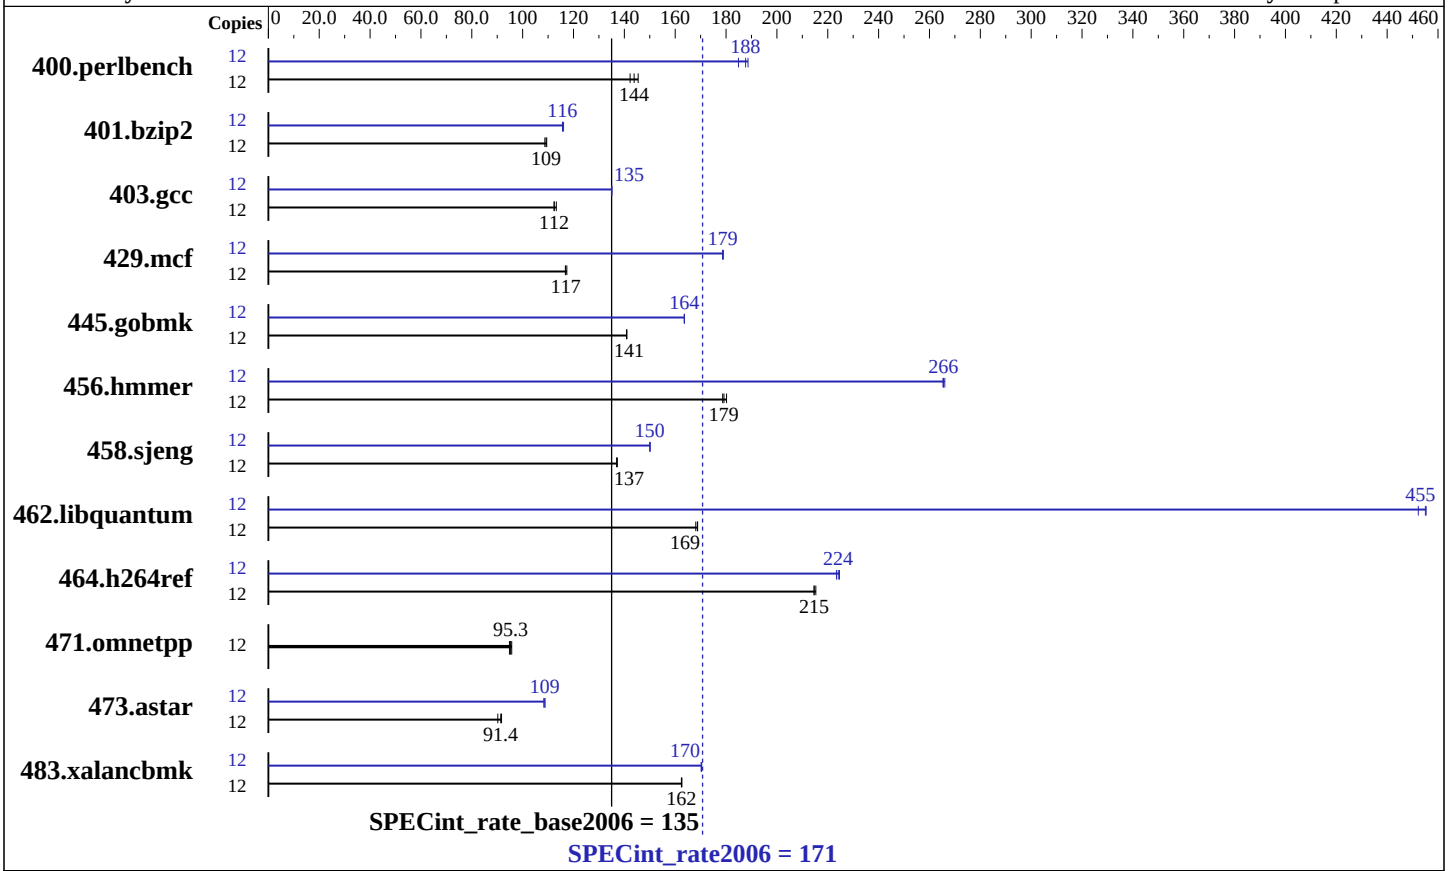

Hardware

CPU Name:	AMD Opteron 2423 HE
CPU Characteristics:	
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (8 x 4 GB DDR2-800)
Disk Subsystem:	1 x 73 GB 15000 RPM SAS
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
Compiler:	PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	binutils 2.18 SmartHeap 8.1 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2970 (AMD Opteron 2423 HE, 2.00 GHz)

SPECint_rate2006 = 171

SPECint_rate_base2006 = 135

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2009
Hardware Availability: Aug-2009
Software Availability: Apr-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	806	145	824	142	**815**	**144**	12	634	185	621	189	**625**	**188**
401.bzip2	12	1058	109	**1060**	**109**	1065	109	12	1001	116	**1001**	**116**	997	116
403.gcc	12	853	113	**859**	**112**	860	112	12	715	135	**716**	**135**	716	135
429.mcf	12	932	117	**936**	**117**	937	117	12	612	179	**612**	**179**	613	179
445.gobmk	12	893	141	**893**	**141**	894	141	12	770	164	769	164	**769**	**164**
456.hmmer	12	621	180	**625**	**179**	627	179	12	**422**	**266**	422	265	421	266
458.sjeng	12	**1059**	**137**	1059	137	1060	137	12	**967**	**150**	968	150	967	150
462.libquantum	12	1479	168	**1474**	**169**	1473	169	12	546	455	**546**	**455**	550	452
464.h264ref	12	1237	215	1233	215	**1237**	**215**	12	1189	223	**1185**	**224**	1182	225
471.omnetpp	12	**787**	**95.3**	791	94.8	784	95.7	12	**787**	**95.3**	791	94.8	784	95.7
473.astar	12	919	91.7	**922**	**91.4**	934	90.2	12	**775**	**109**	778	108	775	109
483.xalancbmk	12	510	162	509	163	**510**	**162**	12	486	170	**486**	**170**	486	170

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd0905is-libs/64:/root/cpu2006-1.1/amd0905is-libs/32"
PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64
```

Base Compiler Invocation

C benchmarks:
`opencc`

C++ benchmarks:
`openCC`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-march=barcelona -Ofast -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m`

C++ benchmarks:
`-march=barcelona -Ofast -m32 -INLINE:aggressive=on`
`-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap`

Peak Compiler Invocation

C benchmarks (except as noted below):
`opencc`

456.hmmer: `pgcc`

C++ benchmarks (except as noted below):
`openCC`

473.astar: `pgcpp`

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-CG:local_sched_alg=1 -CG:unroll_fb_req=on
-HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
-OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
-INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnow
-HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
-HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
-LNO:ignore_feedback=off -CG:p2align=on
-CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge
-Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
-Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: `-march=barcelona -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-O3 -ipa -LNO:ignore_feedback=off`
`-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2`
`-IPA:pu_reorder=2 -CG:ptr_load_use=0`
`-OPT:unroll_times_max=8 -INLINE:aggressive=on`
`-HP:bdt=2m:heap=2m`

462.libquantum: `-march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off`
`-CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0`
`-HP:bdt=2m:heap=2m -OPT:alias=disjoint`
`-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000`

464.h264ref: `-march=barcelona -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-O3 -IPA:plimit=20000`
`-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0`
`-CG:push_pop_int_saved_regs=off -HP:bdt=2m:heap=2m`

C++ benchmarks:

471.omnetpp: `basepeak = yes`

473.astar: `-Mpfi`(pass 1) `-Mpfo`(pass 2) `-Mipa=fast`(pass 2)
`-Mipa=inline:6`(pass 2) `-fastsse -O4 -Msmartalloc=huge`
`-Msafeptr=global -Mfprelaxed --zc_eh -tp shanghai-32`
`-Bstatic_pgi`

483.xalancbmk: `-march=barcelona -Ofast -INLINE:aggressive=on -m32`
`-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off`
`-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap`

Peak Other Flags

C benchmarks:

456.hmmer: `-Mipa=jobs:4`

C++ benchmarks:

473.astar: `-Mipa=jobs:4`(pass 2)

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html`
`http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revB.html`
`http://www.spec.org/cpu2006/flags/amd-platform.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml`
`http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revB.xml`
`http://www.spec.org/cpu2006/flags/amd-platform.xml`

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge 2970 (AMD Opteron 2423 HE, 2.00 GHz)

SPECint_rate2006 = 171

SPECint_rate_base2006 = 135

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Jul-2009
Hardware Availability: Aug-2009
Software Availability: Apr-2009

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:17:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 5 August 2009.