SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard H8DMT+, AMD Opteron 2439 SE

SPECint®_rate2006 = 214

SPECint_rate_base2006 = 168

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Aug-2009
Hardware Availability: Jun-2009
Software Availability: Apr-2009

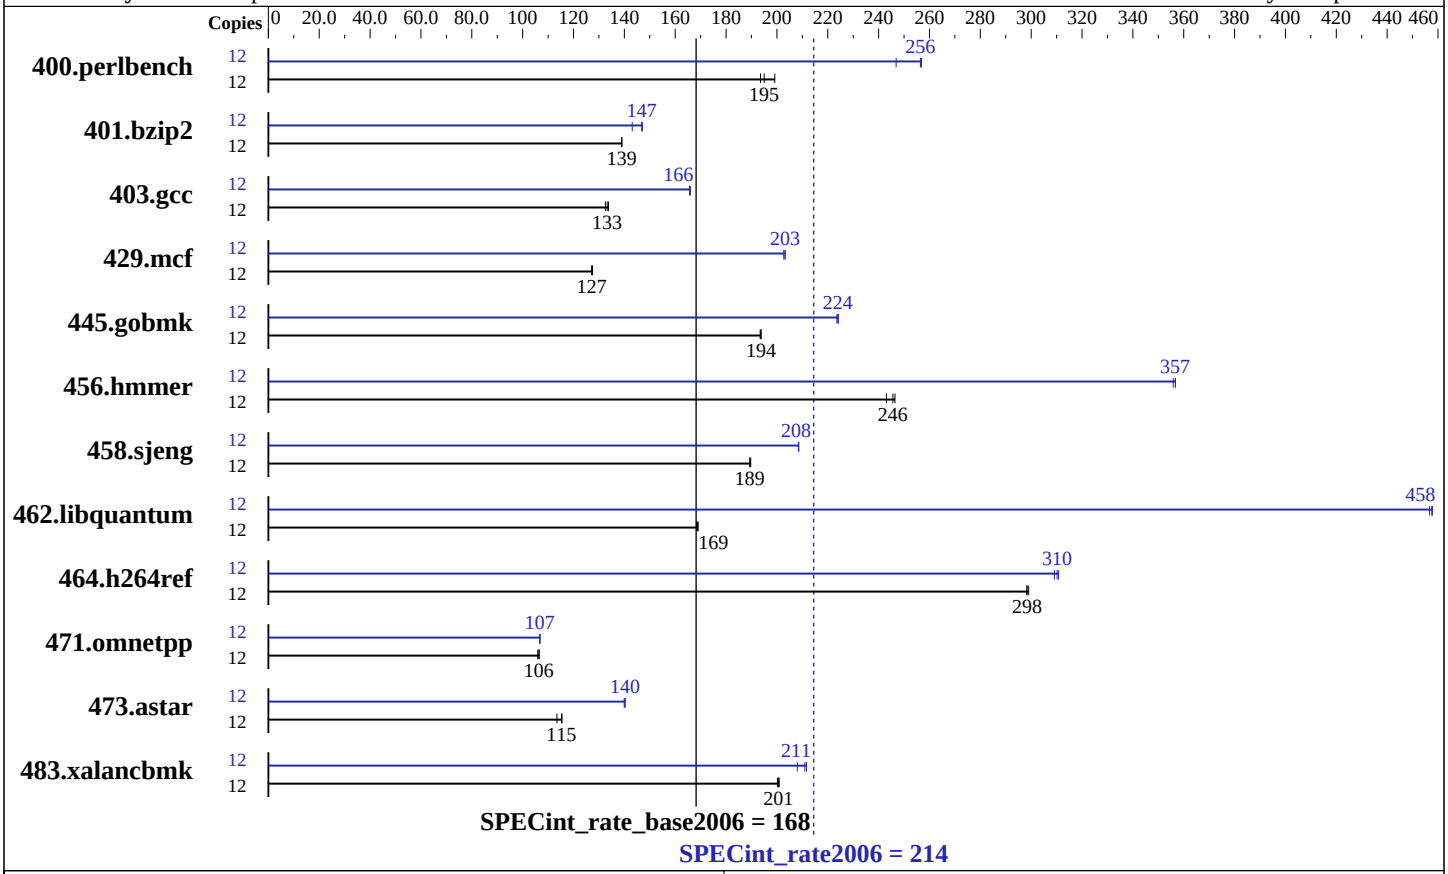

Hardware

CPU Name:	AMD Opteron 2439 SE
CPU Characteristics:	
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	6 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (8x4 GB, DDR2-800, CL5, Reg, Dual Rank)
Disk Subsystem:	1 x 80 GB SATA, 5400 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5
Compiler:	PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	binutils 2.18 SmartHeap 8.1 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard H8DMT+, AMD Opteron 2439 SE

SPECint_rate2006 = 214

SPECint_rate_base2006 = 168

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Aug-2009
Hardware Availability: Jun-2009
Software Availability: Apr-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	589	199	606	194	**601**	**195**	12	475	247	**457**	**256**	456	257
401.bzip2	12	**833**	**139**	833	139	833	139	12	809	143	787	147	**789**	**147**
403.gcc	12	722	134	729	133	**725**	**133**	12	582	166	583	166	**583**	**166**
429.mcf	12	858	128	**860**	**127**	860	127	12	540	203	**539**	**203**	539	203
445.gobmk	12	651	193	650	194	**650**	**194**	12	561	224	563	224	**562**	**224**
456.hmmer	12	**456**	**246**	454	246	461	243	12	315	356	314	357	**314**	**357**
458.sjeng	12	765	190	**767**	**189**	767	189	12	696	209	**696**	**208**	696	208
462.libquantum	12	1471	169	**1473**	**169**	1476	168	12	543	458	544	457	**543**	**458**
464.h264ref	12	**890**	**298**	888	299	890	298	12	859	309	**856**	**310**	854	311
471.omnetpp	12	704	106	708	106	**705**	**106**	12	**702**	**107**	702	107	702	107
473.astar	12	**731**	**115**	742	113	729	115	12	602	140	600	140	**601**	**140**
483.xalancbmk	12	414	200	**413**	**201**	412	201	12	398	208	**392**	**211**	391	212

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/usr/cpu2006/amd0905is-libs/64:/usr/cpu2006/amd0905is-libs/32"
PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64

System can be built with CSE-808T-980(B/V) Revision A4

Product description can be obtained at:
http://www.supermicro.com/Aplus/motherboard/Opteron2000/MCP55/H8DMT+.cfm
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -Ofast -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -Ofast -m32 -INLINE:aggressive=on
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks (except as noted below):
opencc

456.hmmer: pgcc

C++ benchmarks (except as noted below):
openCC

473.astar: pgcpp

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-CG:local_sched_alg=1 -CG:unroll_fb_req=on
-HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
-OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
-INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnow
-HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
-HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
-LNO:ignore_feedback=off -CG:p2align=on
-CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge
-Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
-Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic_pgi

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: `-march=barcelona -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-O3 -ipa -LNO:ignore_feedback=off`
`-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2`
`-IPA:pu_reorder=2 -CG:ptr_load_use=0`
`-OPT:unroll_times_max=8 -INLINE:aggressive=on`
`-HP:bdt=2m:heap=2m`

462.libquantum: `-march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off`
`-CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0`
`-HP:bdt=2m:heap=2m -OPT:alias=disjoint`
`-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000`

464.h264ref: `-march=barcelona -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-O3 -IPA:plimit=20000`
`-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0`
`-CG:push_pop_int_saved_regs=off -HP:bdt=2m:heap=2m`

C++ benchmarks:

471.omnetpp: `-march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on`
`-OPT:alias=disjoint -WOPT:if_conv=0 -m32`
`-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap`

473.astar: `-Mpfi`(pass 1) `-Mpfo`(pass 2) `-Mipa=fast`(pass 2)
`-Mipa=inline:6`(pass 2) `-fastsse -O4 -Msmartalloc=huge`
`-Msafeptr=global -Mfprelaxed --zc_eh -tp shanghai-32`
`-Bstatic_pgi`

483.xalancbmk: `-march=barcelona -Ofast -INLINE:aggressive=on -m32`
`-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off`
`-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap`

Peak Other Flags

C benchmarks:

456.hmmer: `-Mipa=jobs:4`

C++ benchmarks:

473.astar: `-Mipa=jobs:4`(pass 2)

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/amd-platform.20090710.html`
`http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090914.html`
`http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.html`

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/amd-platform.20090710.xml
http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090914.xml
http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 02:42:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 September 2009.