



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint®_rate2006 = 146

NovaScale R460 F2 (Intel Xeon L5609, 1.86 GHz)

SPECint_rate_base2006 = 136

CPU2006 license: 20


Test date: Apr-2010

Test sponsor: Bull SAS

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

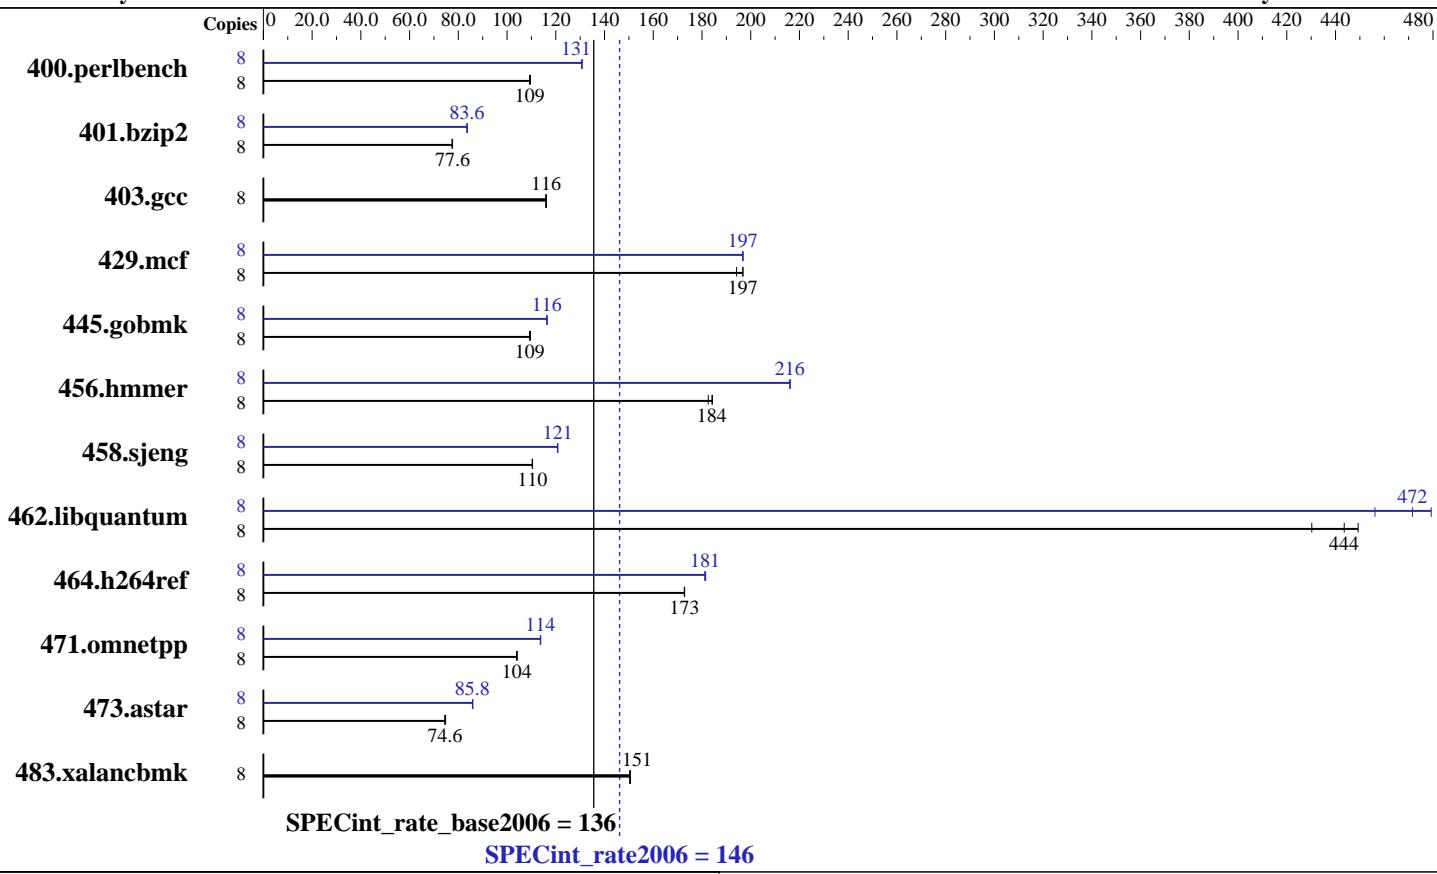

Hardware

CPU Name: Intel Xeon L5609
CPU Characteristics:
CPU MHz: 1867
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 x 4 GB DDR3-1333 DR RDIMM downclocked to 1066 MHz)
Disk Subsystem: 1 x 146 GB 15000 RPM SAS
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-smp
Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
Auto Parallel: No
File System: ext3
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2 (Intel Xeon L5609, 1.86 GHz)

SPECint_rate2006 = 146

CPU2006 license: 20

Test date: Apr-2010

Test sponsor: Bull SAS

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	715	109	713	110	715	109	8	598	131	598	131	598	131
401.bzip2	8	995	77.6	994	77.6	997	77.4	8	924	83.5	923	83.6	923	83.7
403.gcc	8	556	116	555	116	555	116	8	556	116	555	116	555	116
429.mcf	8	376	194	371	197	371	197	8	371	197	371	197	371	197
445.gobmk	8	768	109	767	109	766	110	8	721	116	721	116	721	116
456.hmmer	8	405	184	409	183	405	184	8	345	216	345	216	345	216
458.sjeng	8	877	110	876	110	877	110	8	802	121	801	121	801	121
462.libquantum	8	369	449	385	430	374	444	8	363	456	346	479	352	472
464.h264ref	8	1024	173	1024	173	1025	173	8	975	182	976	181	977	181
471.omnetpp	8	480	104	481	104	481	104	8	439	114	440	114	439	114
473.astar	8	751	74.8	753	74.6	754	74.5	8	654	85.8	653	86.0	655	85.8
483.xalancbmk	8	367	151	367	151	367	150	8	367	151	367	151	367	150

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)
Data Reuse = Disabled (Default = Enabled)

General Notes

The Dell PowerEdge R710 and
the Bull NovaScale R460 F2 models are electronically equivalent.
The results have been measured on a Dell PowerEdge R710 model.

Base Compiler Invocation

C benchmarks:
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2 (Intel Xeon L5609, 1.86 GHz)

SPECint_rate2006 = 146

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Apr-2010
Hardware Availability: Mar-2010
Software Availability: Dec-2009

Base Compiler Invocation (Continued)

C++ benchmarks:
`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmpllr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap`

Base Other Flags

C benchmarks:
`403.gcc: -Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32`

401.bzip2: `icc -m64`
456.hmmr: `icc -m64`
458.sjeng: `icc -m64`
462.libquantum: `icc -m64`

C++ benchmarks (except as noted below):
`icpc -m32`

473.astar: `icpc -m64`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2 (Intel Xeon L5609, 1.86 GHz)

SPECint_rate2006 = 146

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Apr-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: basepeak = yes

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
               -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll12
               -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -unroll14 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
                  -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -unroll12 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
               -L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libicl1.1-32bit -lsmartheap
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R460 F2 (Intel Xeon L5609, 1.86 GHz)

SPECint_rate2006 = 146

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Apr-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
           -L/home/cmpllr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

```
483.xalancbmk: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 09:27:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 25 May 2010.