SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R815 (AMD Opteron 6168, 1.90 GHz)

SPECint®_rate2006 = 706

SPECint_rate_base2006 = 608

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Aug-2010
Hardware Availability: Aug-2010
Software Availability: Jul-2010

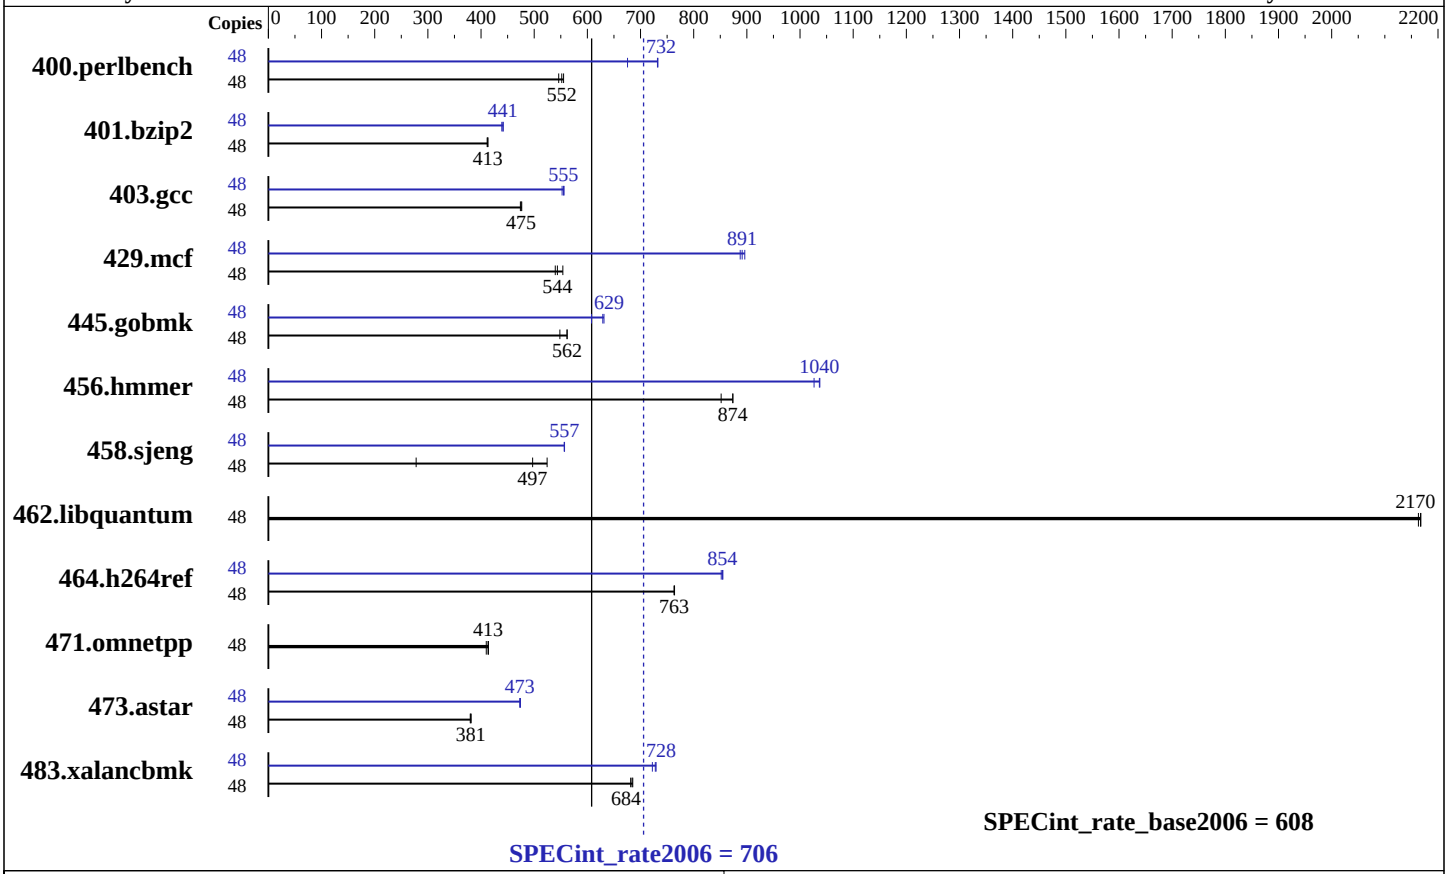

Hardware

CPU Name:	AMD Opteron 6168
CPU Characteristics:	
CPU MHz:	1900
FPU:	Integrated
CPU(s) enabled:	48 cores, 4 chips, 12 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip, 6 MB shared / 6 cores
Other Cache:	None
Memory:	128 GB (32 x 4 GB DDR3-1333 DR RDIMM, CL9, ECC)
Disk Subsystem:	1 x 146 GB SAS 10000 RPM SAS
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) Kernel 2.6.27.19-5-default
Compiler:	x86 Open64 4.2.4 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.1 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R815 (AMD Opteron 6168, 1.90 GHz)

SPECint_rate2006 = 706

SPECint_rate_base2006 = 608

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Aug-2010
Hardware Availability: Aug-2010
Software Availability: Jul-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	859	546	845	555	**850**	**552**	48	694	676	**641**	**732**	640	733
401.bzip2	48	1126	412	**1122**	**413**	1122	413	48	1055	439	**1050**	**441**	1048	442
403.gcc	48	811	477	**813**	**475**	815	474	48	**696**	**555**	699	552	695	556
429.mcf	48	790	554	**805**	**544**	811	540	48	**491**	**891**	493	887	489	896
445.gobmk	48	**896**	**562**	918	548	896	562	48	798	631	828	608	**801**	**629**
456.hmmer	48	**513**	**874**	513	874	526	852	48	436	1030	432	1040	**432**	**1040**
458.sjeng	48	1108	524	2090	278	**1168**	**497**	48	1043	557	**1043**	**557**	1043	557
462.libquantum	48	459	2170	**459**	**2170**	460	2160	48	459	2170	**459**	**2170**	460	2160
464.h264ref	48	1392	763	1390	764	**1392**	**763**	48	1247	852	**1244**	**854**	1243	855
471.omnetpp	48	725	414	**726**	**413**	732	410	48	725	414	**726**	**413**	732	410
473.astar	48	**885**	**381**	884	381	887	380	48	**712**	**473**	711	474	712	473
483.xalancbmk	48	**484**	**684**	483	685	486	681	48	459	722	454	729	**455**	**728**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=21600 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/cpu2006/amd1002-rate-libs-revC/64:/cpu2006/amd1002-rate-libs-revC/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64

Binaries were compiled on SLES10 SP2 with binutils 2.18
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -mso -Ofast -CG:local_sched_alg=1
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on
-CG:cmp_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-CG:local_sched_alg=1 -CG:unroll_fb_req=on
-HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
-OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
-HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
-LNO:ignore_feedback=off -CG:p2align=on
-CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
-OPT:alias=disjoint -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-CG:local_sched_alg=1 -CG:cflow=0
-CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
-HP:bdt=2m:heap=2m

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: `-march=barcelona -mso -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-O3 -ipa -LNO:ignore_feedback=off`
`-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2`
`-IPA:pu_reorder=2 -CG:ptr_load_use=0`
`-OPT:unroll_times_max=8 -INLINE:aggressive=on`

462.libquantum: `basepeak = yes`

464.h264ref: `-march=barcelona -mso -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-O3 -IPA:plimit=20000`
`-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0`
`-CG:push_pop_int_saved_regs=off`

C++ benchmarks:

471.omnetpp: `basepeak = yes`

473.astar: `-march=barcelona -mso -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-Ofast -TENV:frame_pointer=off`
`-WOPT:if_conv=0 -GRA:optimize_boundary=on`
`-OPT:alias=disjoint -INLINE:aggressive=on`
`-IPA:small_pu=3000 -IPA:plimit=3000 -m32`
`-HP:bdt=2m:heap=2m`

483.xalancbmk: `-march=barcelona -mso -Ofast -INLINE:aggressive=on -m32`
`-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off`
`-fno-emit-exceptions`
`-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html
http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml
http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 12:48:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 September 2010.