



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6124 HE

SPECint®2006 = 18.0

SPECint_base2006 = 14.5

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

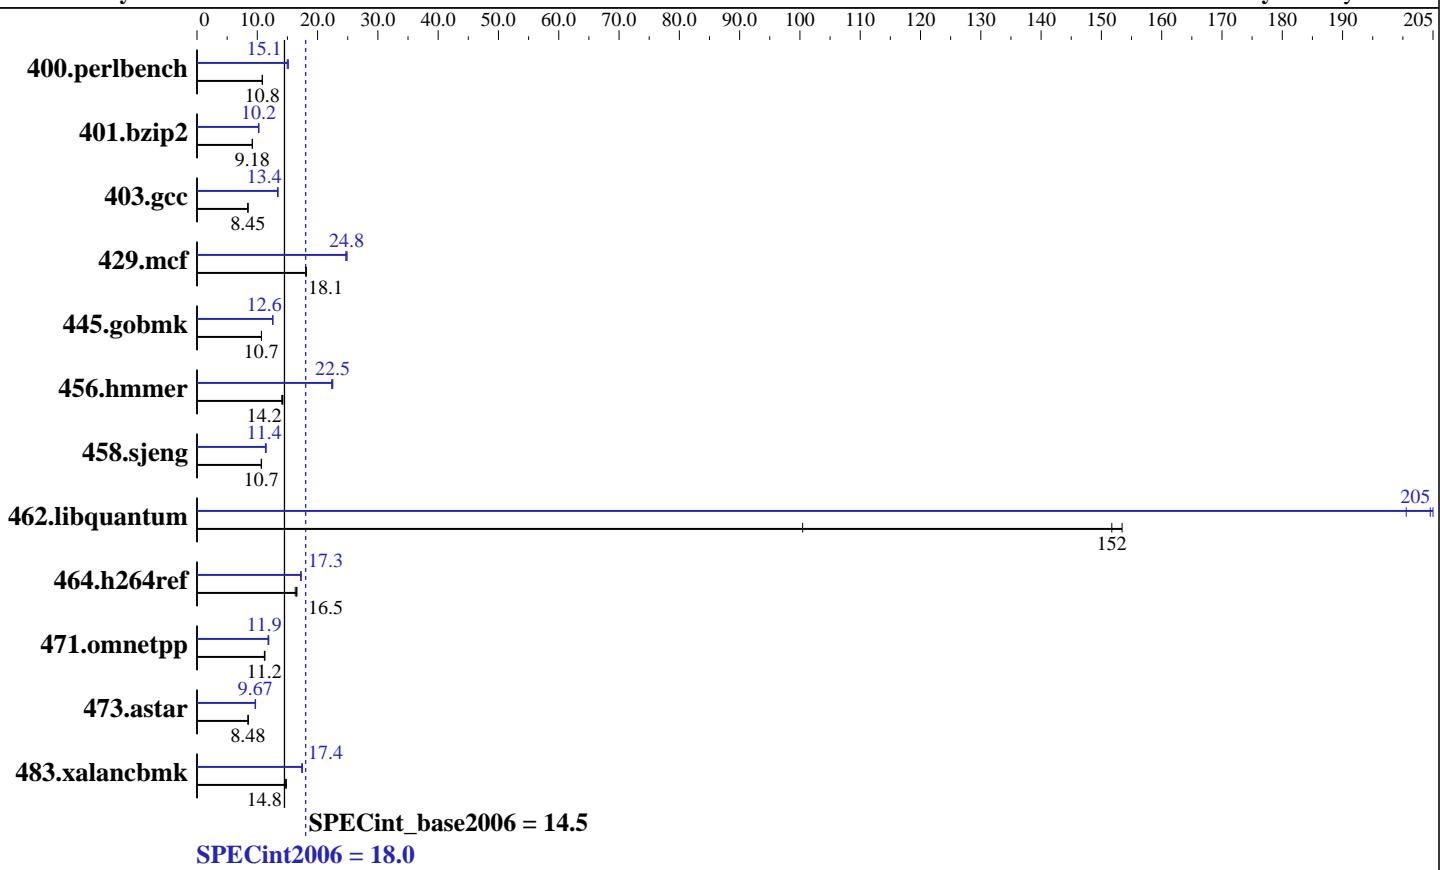

Hardware

| | |
|----------------------|---|
| CPU Name: | AMD Opteron 6124 HE |
| CPU Characteristics: | |
| CPU MHz: | 1800 |
| FPU: | Integrated |
| CPU(s) enabled: | 16 cores, 2 chips, 8 cores/chip |
| CPU(s) orderable: | 1,2 chips |
| Primary Cache: | 64 KB I + 64 KB D on chip per core |
| Secondary Cache: | 512 KB I+D on chip per core |
| L3 Cache: | 12 MB I+D on chip per chip, 6 MB shared / 4 cores |
| Other Cache: | None |
| Memory: | 64 GB (16 x 4 GB 2Rx4 PC3-10600R-9, ECC) |
| Disk Subsystem: | 1 x 250 GB SATA, 7200 RPM |
| Other Hardware: | None |

Software

| | |
|-------------------|---|
| Operating System: | Red Hat Enterprise Linux Server release 5.4, Advanced Platform with patch RHSA-2009:1670, Kernel 2.6.18-164.9.1.el5 |
| Compiler: | x86 Open64 4.2.3.2 Compiler Suite (from AMD) |
| Auto Parallel: | Yes |
| File System: | ext3 |
| System State: | Run level 3 (Full multiuser with network) |
| Base Pointers: | 32/64-bit |
| Peak Pointers: | 32/64-bit |
| Other Software: | binutils 2.18 SmartHeap 8.1 32-bit Library for Linux |



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6124 HE

SPECint2006 = 18.0

SPECint_base2006 = 14.5

CPU2006 license: 49

Test date: Oct-2010

Test sponsor: Advanced Micro Devices

Hardware Availability: Mar-2010

Tested by: Advanced Micro Devices

Software Availability: May-2010

Results Table

| Benchmark | Base | | | | | | Peak | | | | | |
|----------------|------------|-------------|-------------|-------------|------------|-------------|------------|-------------|------------|-------------|-------------|-------------|
| | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 901 | 10.8 | 901 | 10.8 | 901 | 10.8 | 647 | 15.1 | 653 | 15.0 | 646 | 15.1 |
| 401.bzip2 | 1049 | 9.20 | 1051 | 9.18 | 1053 | 9.17 | 943 | 10.2 | 944 | 10.2 | 941 | 10.3 |
| 403.gcc | 952 | 8.46 | 954 | 8.44 | 953 | 8.45 | 600 | 13.4 | 599 | 13.4 | 603 | 13.4 |
| 429.mcf | 505 | 18.1 | 505 | 18.1 | 503 | 18.1 | 367 | 24.9 | 367 | 24.8 | 370 | 24.7 |
| 445.gobmk | 981 | 10.7 | 982 | 10.7 | 981 | 10.7 | 835 | 12.6 | 834 | 12.6 | 837 | 12.5 |
| 456.hammer | 658 | 14.2 | 664 | 14.1 | 655 | 14.2 | 415 | 22.5 | 414 | 22.5 | 418 | 22.3 |
| 458.sjeng | 1136 | 10.7 | 1132 | 10.7 | 1130 | 10.7 | 1066 | 11.3 | 1056 | 11.5 | 1059 | 11.4 |
| 462.libquantum | 137 | 152 | 206 | 100 | 135 | 153 | 101 | 205 | 103 | 201 | 101 | 205 |
| 464.h264ref | 1337 | 16.6 | 1338 | 16.5 | 1358 | 16.3 | 1282 | 17.3 | 1287 | 17.2 | 1282 | 17.3 |
| 471.omnetpp | 555 | 11.3 | 557 | 11.2 | 559 | 11.2 | 527 | 11.9 | 531 | 11.8 | 525 | 11.9 |
| 473.astar | 827 | 8.49 | 828 | 8.48 | 829 | 8.47 | 723 | 9.71 | 726 | 9.67 | 727 | 9.66 |
| 483.xalancbmk | 467 | 14.8 | 468 | 14.7 | 467 | 14.8 | 397 | 17.4 | 396 | 17.4 | 394 | 17.5 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm.nr_hugepages=4000 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

cpuspeed stop was used to set the CPU frequency to its maximum.

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/work/cpu2006/amd1002mc-speed-libs-revA/64:/root/work/cpu2006/amd1002mc-speed-libs-revA/32"
O64_OMP_AFFINITY_MAP = "0,1,2,3,4,5,6,7,8,9,10,11,12,13,14,15"
O64_OMP_SPIN_USER_LOCK = "true"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6124 HE

SPECint2006 = 18.0

SPECint_base2006 = 14.5

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
-march=barcelona -Ofast -apo -CG:local_sched_alg=1
-HP:bdt=2m:heap=2m,limit=450 -LNO:parallel_overhead=10000

C++ benchmarks:
-march=barcelona -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6124 HE

SPECint2006 = 18.0

SPECint_base2006 = 14.5

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

Peak Portability Flags (Continued)

```
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m
```

```
401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
            -OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
```

```
403.gcc: -march=barcelona -fb_create fbdata(pass 1)
          -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
          -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
          -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
```

```
429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
          -CG:gcm=off -GRA:prioritize_by_density=on -m32
          -HP:bdt=2m:heap=2m
```

```
445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
            -OPT:unroll_times_max=8 -OPT:unroll_size=256
            -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
            -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
            -LNO:ignore_feedback=off -CG:p2align=on
            -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m
```

```
456.hmmr: -march=barcelona -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
           -OPT:alias=disjoint -OPT:unroll_times_max=8
           -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
           -CG:local_sched_alg=1 -CG:cflow=0
           -CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
           -HP:bdt=2m:heap=2m
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6124 HE

SPECint2006 = 18.0

SPECint_base2006 = 14.5

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

Peak Optimization Flags (Continued)

```
458.sjeng: -march=barcelona -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
           -LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
           -IPA:pu_reorder=2 -IPA:min_hotness=32 -CG:ptr_load_use=0
           -OPT:unroll_times_max=8 -INLINE:aggressive=on
           -HP:bdt=2m:heap=2m
```

```
462.libquantum: -march=barcelona -Ofast -apo -LNO:pf2=0 -CG:gcm=off
                 -CG:use_prefetch_nta=on -CG:cmp_peep=on -WOPT:aggstr=0
                 -OPT:alias=disjoint -INLINE:aggressive=on -IPA:space=1000
                 -IPA:plimit=20000 -mso
```

```
464.h264ref: -march=barcelona -fb_create fbdata(pass 1)
              -fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
              -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
              -CG:push_pop_int_saved_regs=off -HP:bdt=2m:heap=2m
```

C++ benchmarks:

```
471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on
              -WOPT:if_conv=0 -m32 -HP:bdt=2m:heap=2m
```

```
473.astar: -march=barcelona -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
            -WOPT:if_conv=0 -GRA:optimize_boundary=on
            -OPT:alias=disjoint -INLINE:aggressive=on
            -IPA:small_pu=3000 -IPA:plimit=3000 -m32
            -HP:bdt=2m:heap=2m
```

```
483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32
                 -CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
                 -fno-emit-exceptions
                 -L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.html>
<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-423-flags-speed-revA.20101207.xml>
<http://www.spec.org/cpu2006/flags/amd-platform-speed-revA.20101207.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 1022G-NTF,
AMD Opteron 6124 HE

SPECint2006 = 18.0

SPECint_base2006 = 14.5

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Oct-2010

Hardware Availability: Mar-2010

Software Availability: May-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 14:10:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 December 2010.