



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Acer Incorporated

SPECfp<sup>®</sup>\_rate2006 = 634

## Gateway GR585 F1 (AMD Opteron 6176)

SPECfp\_rate\_base2006 = 586

CPU2006 license: 97


Test date: Feb-2011

Test sponsor: Acer Incorporated

Hardware Availability: Feb-2011

Tested by: Acer Incorporated

Software Availability: Jul-2010

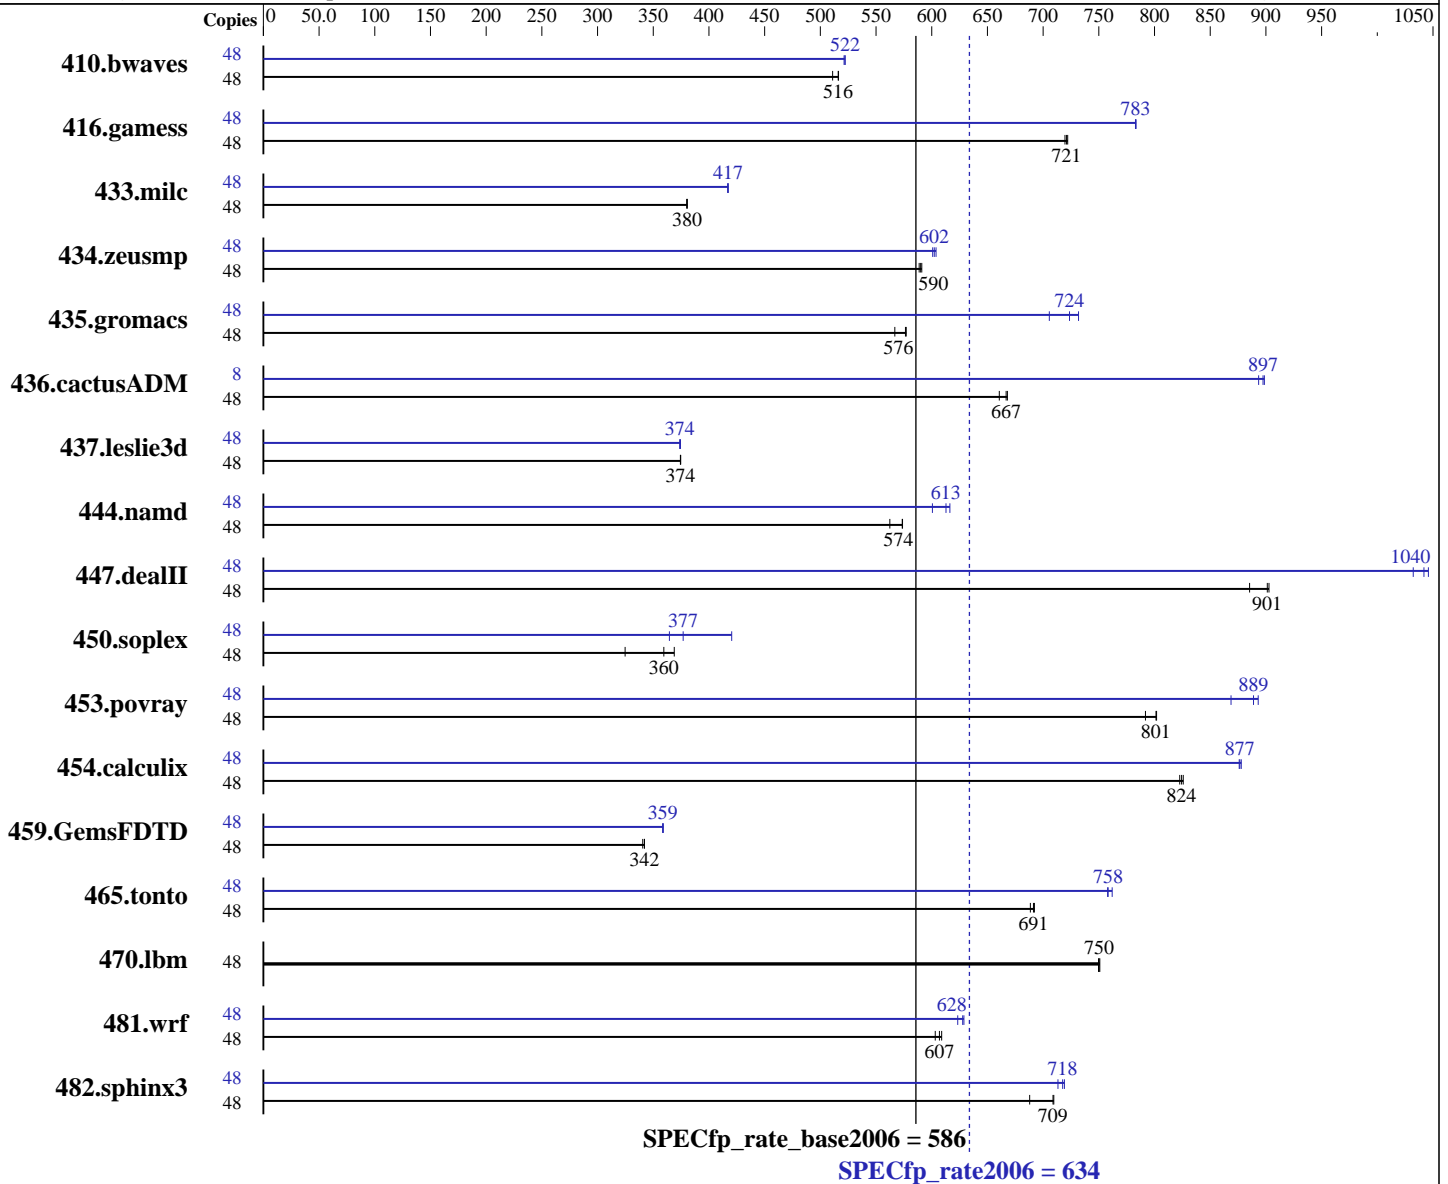

### Hardware

CPU Name: AMD Opteron 6176  
 CPU Characteristics:  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 5.5, Kernel 2.6.18-194.el5  
 Compiler: x86 Open64 4.2.4 Compiler Suite (from AMD)  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 634

Gateway GR585 F1 (AMD Opteron 6176)

SPECfp\_rate\_base2006 = 586

CPU2006 license: 97

Test date: Feb-2011

Test sponsor: Acer Incorporated

Hardware Availability: Feb-2011

Tested by: Acer Incorporated

Software Availability: Jul-2010

L3 Cache: 12 MB I+D on chip per chip, 6 MB shared / 6 cores  
Other Cache: None  
Memory: 128 GB (32 x 4 GB 2Rx8 PC3-10600R-9, ECC)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1276	511	1263	516	<u>1264</u>	<u>516</u>	48	1251	521	1249	522	<u>1249</u>	<u>522</u>
416.gamess	48	1302	722	<u>1303</u>	<u>721</u>	1306	720	48	<u>1200</u>	<u>783</u>	1200	783	1200	783
433.milc	48	1159	380	1158	380	<u>1158</u>	<u>380</u>	48	1057	417	<u>1056</u>	<u>417</u>	1056	417
434.zeusmp	48	742	589	<u>740</u>	<u>590</u>	739	591	48	727	601	<u>725</u>	<u>602</u>	723	604
435.gromacs	48	605	567	594	577	<u>595</u>	<u>576</u>	48	<u>474</u>	<u>724</u>	468	732	486	706
436.cactusADM	48	868	661	<u>860</u>	<u>667</u>	859	668	8	107	893	<u>107</u>	<u>897</u>	106	899
437.leslie3d	48	1204	375	<u>1205</u>	<u>374</u>	1205	374	48	1205	374	<u>1207</u>	<u>374</u>	1207	374
444.namd	48	685	562	671	574	<u>671</u>	<u>574</u>	48	641	601	<u>628</u>	<u>613</u>	625	616
447.dealII	48	608	903	<u>609</u>	<u>901</u>	620	885	48	532	1030	<u>527</u>	<u>1040</u>	525	1050
450.soplex	48	1233	325	<u>1114</u>	<u>360</u>	1085	369	48	1098	364	<u>1062</u>	<u>377</u>	952	420
453.povray	48	322	792	318	802	<u>319</u>	<u>801</u>	48	<u>287</u>	<u>889</u>	294	869	286	893
454.calculix	48	480	826	<u>480</u>	<u>824</u>	481	823	48	<u>452</u>	<u>877</u>	452	876	451	878
459.GemsFDTD	48	1495	341	1489	342	<u>1489</u>	<u>342</u>	48	<u>1420</u>	<u>359</u>	1421	358	1419	359
465.tonto	48	<u>683</u>	<u>691</u>	682	692	686	689	48	620	762	623	758	<u>623</u>	<u>758</u>
470.lbm	48	880	750	878	751	<u>879</u>	<u>750</u>	48	880	750	878	751	<u>879</u>	<u>750</u>
481.wrf	48	889	603	881	609	<u>883</u>	<u>607</u>	48	<u>854</u>	<u>628</u>	860	623	853	629
482.sphinx3	48	1318	710	1360	688	<u>1320</u>	<u>709</u>	48	<u>1304</u>	<u>718</u>	1312	713	1301	719

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=21600 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 634

Gateway GR585 F1 (AMD Opteron 6176)

SPECfp\_rate\_base2006 = 586

CPU2006 license: 97

Test date: Feb-2011

Test sponsor: Acer Incorporated

Hardware Availability: Feb-2011

Tested by: Acer Incorporated

Software Availability: Jul-2010

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "450"

LD\_LIBRARY\_PATH = "/usr/cpu2006/amd1002-rate-libs-revC/64:/usr/cpu2006/amd1002-rate-libs-revC/32"

OMP\_NUM\_THREADS = "6"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at

<http://developer.amd.com/cpu/open64>

This result was measured on the Gateway GR585 F1.

The Acer AR585 F1 and Gateway GR585 F1 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:  
openc

C++ benchmarks:  
openCC

Fortran benchmarks:  
openf95

Benchmarks using both Fortran and C:  
openc openf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.lelie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp\_rate2006 = 634

Gateway GR585 F1 (AMD Opteron 6176)

SPECfp\_rate\_base2006 = 586

CPU2006 license: 97

Test date: Feb-2011

Test sponsor: Acer Incorporated

Hardware Availability: Feb-2011

Tested by: Acer Incorporated

Software Availability: Jul-2010

## Base Optimization Flags

C benchmarks:

-march=barcelona -mso -Ofast -OPT:malloc\_alg=1 -HP:bdt=2m

C++ benchmarks:

-march=barcelona -mso -Ofast -static -INLINE:aggressive=on  
-OPT:malloc\_alg=1 -HP:bdt=2m

Fortran benchmarks:

-march=barcelona -mso -Ofast -HP

Benchmarks using both Fortran and C:

-march=barcelona -mso -Ofast -OPT:malloc\_alg=1 -HP:bdt=2m -HP

## Peak Compiler Invocation

C benchmarks:

opencc

C++ benchmarks:

openCC

Fortran benchmarks:

openf95

Benchmarks using both Fortran and C:

opencc openf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -DSPEC\_CPU\_CASE\_FLAG  
-fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp\_rate2006 = 634**

**Gateway GR585 F1 (AMD Opteron 6176)**

**SPECfp\_rate\_base2006 = 586**

**CPU2006 license:** 97

**Test date:** Feb-2011

**Test sponsor:** Acer Incorporated

**Hardware Availability:** Feb-2011

**Tested by:** Acer Incorporated

**Software Availability:** Jul-2010

## Peak Optimization Flags

### C benchmarks:

433.milc: -march=barcelona -mso -Ofast -CG:movnti=1  
-CG:local\_sched\_alg=1 -CG:locs\_shallow\_depth=1  
-HP:bdt=2m:heap=2m -LNO:prefetch=3

470.lbm: basepeak = yes

482.sphinx3: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=2  
-CG:sse\_cse\_regs=0 -CG:locs\_shallow\_depth=1 -CG:cmp\_peep=on  
-CG:local\_sched\_alg=1 -INLINE:aggressive=on

### C++ benchmarks:

444.namd: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -LNO:ignore\_feedback=off  
-CG:local\_sched\_alg=2 -CG:load\_exe=0 -CG:compute\_to=on  
-OPT:unroll\_size=256 -fno-exceptions -HP:bdt=2m:heap=2m

447.deallI: -march=barcelona -mso -Ofast -static -INLINE:aggressive=on  
-LNO:opt=0 -fno-emit-exceptions -m32  
-OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
-OPT:unroll\_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on  
-CG:cmp\_peep=on -TENV:frame\_pointer=off

450.soplex: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -INLINE:aggressive=on  
-OPT:IEEE\_arith=3 -OPT:IEEE\_NaN\_Inf=off  
-OPT:fold\_unsigned\_relops=on -OPT:malloc\_alg=1  
-CG:load\_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

### Fortran benchmarks:

410.bwaves: -march=barcelona -mso -O3 -OPT:Ofast -OPT:treeheight=on  
-LNO:blocking=off -LNO:prefetch\_ahead=5  
-LNO:ignore\_feedback=off -WOPT:aggstr=0 -HP:bdt=2m:heap=2m  
-CG:cmp\_peep=on

416.gamess: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -LNO:fu=6 -LNO:blocking=0  
-LNO:prefetch=0 -OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256  
-HP:bdt=2m:heap=2m

434.zeusmp: -march=barcelona -mso -Ofast -LNO:blocking=off  
-LNO:interchange=off -OPT:treeheight=on -OPT:unroll\_size=256  
-CG:cmp\_peep=on -GRA:prioritize\_by\_density=on -HP

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Acer Incorporated**

**SPECfp\_rate2006 = 634**

**Gateway GR585 F1 (AMD Opteron 6176)**

**SPECfp\_rate\_base2006 = 586**

**CPU2006 license:** 97

**Test date:** Feb-2011

**Test sponsor:** Acer Incorporated

**Hardware Availability:** Feb-2011

**Tested by:** Acer Incorporated

**Software Availability:** Jul-2010

## Peak Optimization Flags (Continued)

437.leslie3d: -march=barcelona -mso -Ofast -HP:bdt=2m:heap=2m

459.GemsFDTD: -march=barcelona -mso -Ofast -LNO:fission=2  
-LNO:prefetch\_ahead=1 -CG:load\_exe=0 -CG:local\_sched\_alg=1  
-HP

465.tonto: -march=barcelona -mso -Ofast  
-OPT:alias=no\_f90\_pointer\_alias -LNO:blocking=off  
-CG:load\_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -mso -Ofast -OPT:rsqrt=2  
-HP:bdt=2m:heap=2m

436.cactusADM: -march=barcelona -mso -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -apo -LNO:prefetch\_ahead=1  
-HP:bdt=2m:heap=2m -LANG:heap\_allocation\_threshold=100

454.calculix: -march=barcelona -mso -Ofast -CG:load\_exe=0  
-CG:ptr\_load\_use=0 -CG:local\_sched\_alg=2 -CG:compute\_to=on  
-LNO:prefetch\_ahead=30 -WOPT:unroll=2  
-GRA:optimize\_boundary=on -HP:bdt=2m:heap=2m

481.wrf: -march=barcelona -mso -Ofast -LNO:blocking=off  
-LNO:prefetch\_ahead=10 -LANG:copyinout=off  
-IPA:callee\_limit=5000 -GRA:prioritize\_by\_density=on -m3dnow  
-HP

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>  
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>  
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 16:18:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 March 2011.