SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS W510, Intel Xeon E3-1280

SPECint®_rate2006 = 168

SPECint_rate_base2006 = 161

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Apr-2011
Hardware Availability: Apr-2011
Software Availability: Jan-2011

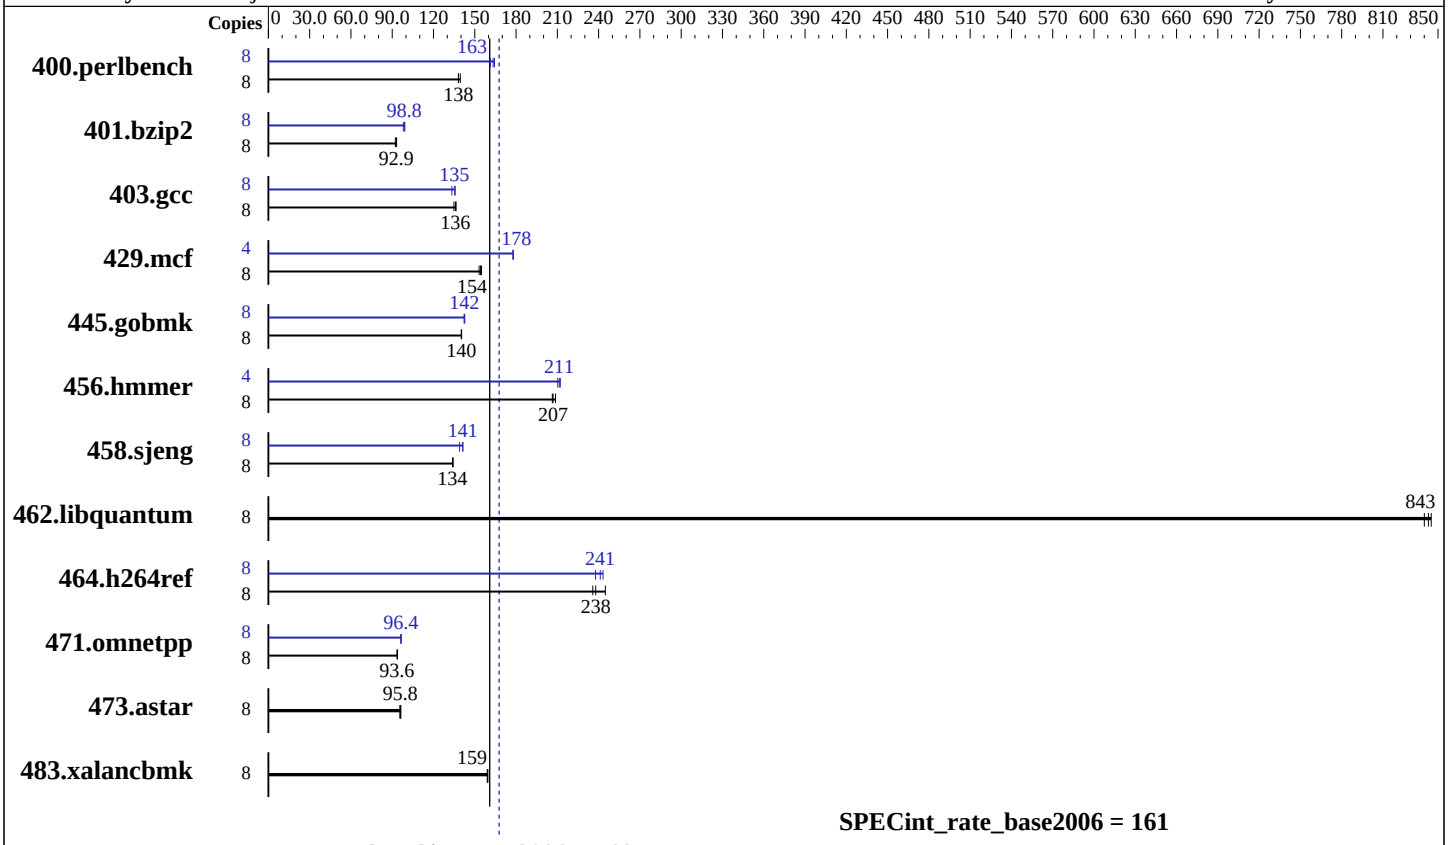

Hardware

CPU Name:	Intel Xeon E3-1280
CPU Characteristics:	Intel Turbo Boost Technology up to 3.9 GHz
CPU MHz:	3500
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	8 GB (2 x 4 GB 2Rx8 PC3-10600U-9, non-ECC)
Disk Subsystem:	1 x SATA II, 400 GB, 7200 rpm
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) SP1, kernel 2.6.32.12-0.6-default
Compiler:	Intel C++ Compiler XE for applications running on Intel 64 Version 12.0.2.137 Build 20110112
Auto Parallel:	No
File System:	ext3
System State:	Run Level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS W510, Intel Xeon E3-1280

SPECint_rate2006 = 168

SPECint_rate_base2006 = 161

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Apr-2011
Hardware Availability: Apr-2011
Software Availability: Jan-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	560	139	566	138	**566**	**138**	8	484	161	476	164	**479**	**163**
401.bzip2	8	828	93.2	837	92.3	**831**	**92.9**	8	787	98.1	**781**	**98.8**	778	99.2
403.gcc	8	472	136	477	135	**473**	**136**	8	**476**	**135**	474	136	483	133
429.mcf	8	476	153	471	155	**473**	**154**	4	**205**	**178**	205	178	205	178
445.gobmk	8	**598**	**140**	598	140	599	140	8	590	142	588	143	**589**	**142**
456.hmmer	8	358	209	362	206	**361**	**207**	4	176	212	**177**	**211**	177	210
458.sjeng	8	**723**	**134**	721	134	723	134	8	**685**	**141**	685	141	697	139
462.libquantum	8	**197**	**843**	197	840	196	845	8	**197**	**843**	197	840	196	845
464.h264ref	8	723	245	751	236	**744**	**238**	8	728	243	745	238	**734**	**241**
471.omnetpp	8	534	93.6	**534**	**93.6**	533	93.8	8	**519**	**96.4**	519	96.3	519	96.4
473.astar	8	583	96.3	**586**	**95.8**	587	95.6	8	583	96.3	**586**	**95.8**	587	95.6
483.xalancbmk	8	346	159	**346**	**159**	347	159	8	346	159	**346**	**159**	347	159

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
Huge pages were not configured for this run
```

Base Compiler Invocation

C benchmarks:

```
icc  -m32
```

C++ benchmarks:

```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT
```

C++ benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/opt/smartheap/ia32 -lsmartheap
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc  -m32
```

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
```
icpc -m32
```

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2)
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

403.gcc: -xAVX -ipo -O3 -no-prec-div
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

429.mcf: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias
-auto-ilp32

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -auto-ilp32

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-auto-ilp32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/opt/smartheap/ia32 -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html`
`http://www.spec.org/cpu2006/flags/Platform.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml`
`http://www.spec.org/cpu2006/flags/Platform.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 20:22:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 May 2011.