SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M915 (AMD Opteron 6168, 1.9 GHz)

SPECint®_rate2006 = 697

SPECint_rate_base2006 = 609

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: May-2011
Hardware Availability: May-2011
Software Availability: Jul-2010

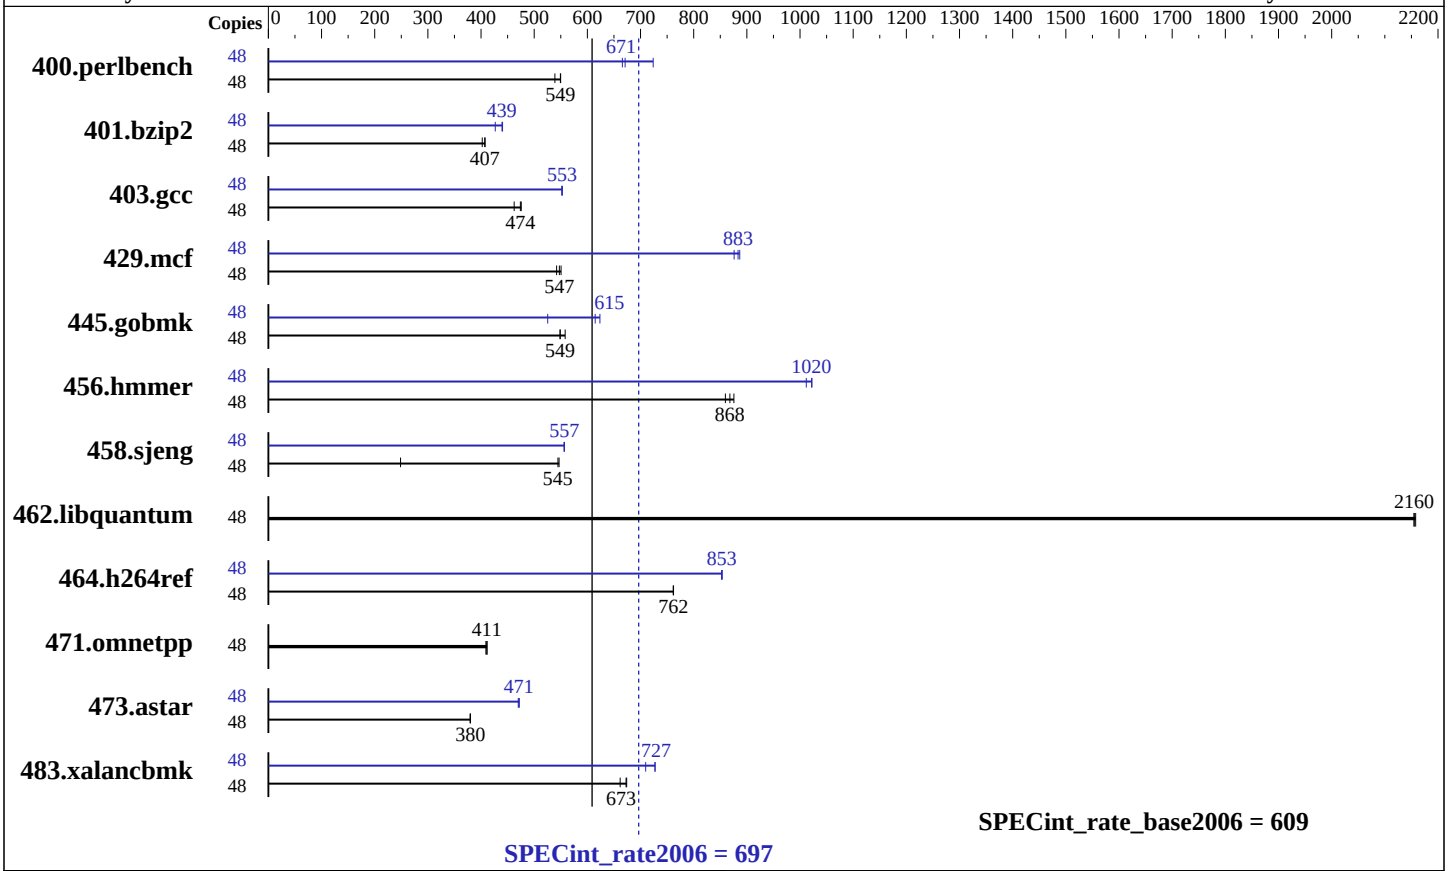

Hardware

CPU Name:	AMD Opteron 6168
CPU Characteristics:	
CPU MHz:	1900
FPU:	Integrated
CPU(s) enabled:	48 cores, 4 chips, 12 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip, 6 MB shared / 6 cores
Other Cache:	None
Memory:	128 GB (32 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem:	1 x 146 GB 10000 RPM SAS
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
Compiler:	x86 Open64 4.2.4 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.1 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge M915 (AMD Opteron 6168, 1.9 GHz)

SPECint_rate2006 = 697

SPECint_rate_base2006 = 609

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: May-2011
Hardware Availability: May-2011
Software Availability: Jul-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	870	539	853	550	**854**	**549**	48	704	666	**699**	**671**	648	724
401.bzip2	48	1151	402	**1138**	**407**	1136	408	48	1085	427	**1054**	**439**	1052	440
403.gcc	48	812	476	836	462	**815**	**474**	48	699	553	**699**	**553**	700	552
429.mcf	48	807	542	**800**	**547**	795	551	48	494	887	500	876	**496**	**883**
445.gobmk	48	902	558	**917**	**549**	918	549	48	958	525	807	624	**819**	**615**
456.hmmer	48	**516**	**868**	511	876	521	860	48	**438**	**1020**	438	1020	443	1010
458.sjeng	48	**1066**	**545**	1062	547	2336	249	48	1043	557	1044	556	**1043**	**557**
462.libquantum	48	462	2150	461	2160	**461**	**2160**	48	462	2150	461	2160	**461**	**2160**
464.h264ref	48	**1394**	**762**	1395	762	1394	762	48	1246	853	1245	853	**1245**	**853**
471.omnetpp	48	**730**	**411**	729	411	733	409	48	**730**	**411**	729	411	733	409
473.astar	48	888	379	**887**	**380**	886	380	48	714	472	717	470	**715**	**471**
483.xalancbmk	48	501	662	491	674	**492**	**673**	48	467	710	**455**	**727**	455	727

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=21600 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd1002-rate-libs-revC/64:/root/cpu2006-1.1/amd1002-rate-libs-revC/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64
Binaries were compiled on SLES10 SP2 with binutils 2.18
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -mso -Ofast -CG:local_sched_alg=1
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on
-CG:cmp_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-CG:local_sched_alg=1 -CG:unroll_fb_req=on
-HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
-OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
-HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
-LNO:ignore_feedback=off -CG:p2align=on
-CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
-OPT:alias=disjoint -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-CG:local_sched_alg=1 -CG:cflow=0
-CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
-HP:bdt=2m:heap=2m

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: `-march=barcelona -mso -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-O3 -ipa -LNO:ignore_feedback=off`
`-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2`
`-IPA:pu_reorder=2 -CG:ptr_load_use=0`
`-OPT:unroll_times_max=8 -INLINE:aggressive=on`

462.libquantum: `basepeak = yes`

464.h264ref: `-march=barcelona -mso -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-O3 -IPA:plimit=20000`
`-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0`
`-CG:push_pop_int_saved_regs=off`

C++ benchmarks:

471.omnetpp: `basepeak = yes`

473.astar: `-march=barcelona -mso -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-Ofast -TENV:frame_pointer=off`
`-WOPT:if_conv=0 -GRA:optimize_boundary=on`
`-OPT:alias=disjoint -INLINE:aggressive=on`
`-IPA:small_pu=3000 -IPA:plimit=3000 -m32`
`-HP:bdt=2m:heap=2m`

483.xalancbmk: `-march=barcelona -mso -Ofast -INLINE:aggressive=on -m32`
`-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off`
`-fno-emit-exceptions`
`-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html
http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml
http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 18:24:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 7 June 2011.