



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

**SPECint®2006 = 28.1**

NovaScale T840 F2 (Intel Xeon E5607, 2.26 GHz)

**SPECint\_base2006 = 26.9**

CPU2006 license: 20


**Test date:** Jun-2011

**Test sponsor:** Bull SAS

**Hardware Availability:** Feb-2011

**Tested by:** Dell Inc.

**Software Availability:** Jan-2011

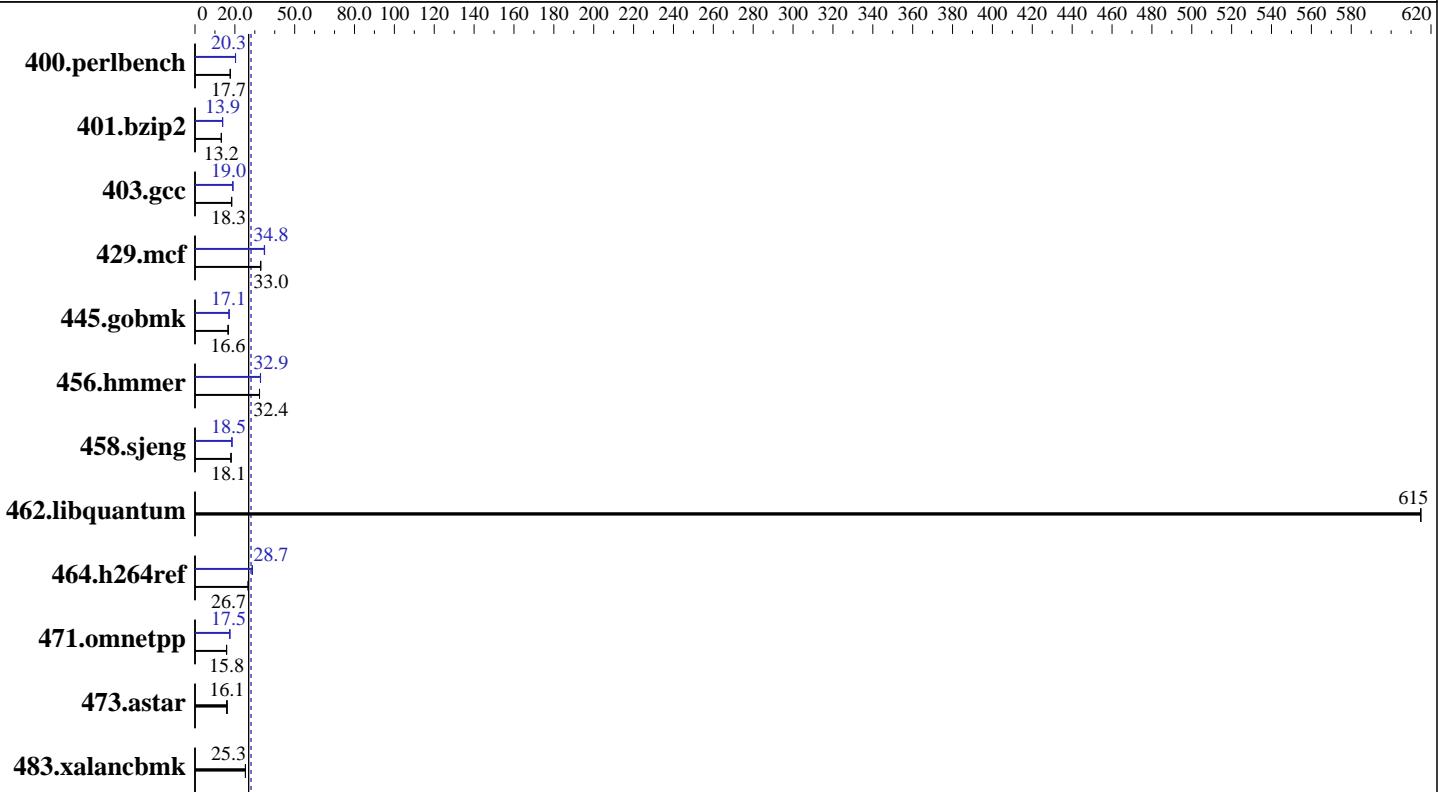

**SPECint\_base2006 = 26.9**

**SPECint2006 = 28.1**

## Hardware

CPU Name:	Intel Xeon E5607
CPU Characteristics:	
CPU MHz:	2267
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	48 GB (12 x 4 GB 2Rx4 PC3-10600R-9, ECC, running at 1066 MHz)
Disk Subsystem:	2 x 146 GB 15000 RPM SAS
Other Hardware:	None

## Software

Operating System:	SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
Compiler:	Intel C++ Intel 64 Compiler XE for applications running on Intel 64 Version 12.0.1.116 Build 20101116
Auto Parallel:	Yes
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T840 F2 (Intel Xeon E5607, 2.26 GHz)

**SPECint2006 = 28.1**

<b>CPU2006 license:</b> 20	<b>Test date:</b> Jun-2011
<b>Test sponsor:</b> Bull SAS	<b>Hardware Availability:</b> Feb-2011
<b>Tested by:</b> Dell Inc.	<b>Software Availability:</b> Jan-2011

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	553	17.7	<b>552</b>	<b>17.7</b>	552	17.7	480	20.4	<b>481</b>	<b>20.3</b>	481	20.3
401.bzip2	730	13.2	<b>730</b>	<b>13.2</b>	730	13.2	<b>697</b>	<b>13.9</b>	697	13.9	697	13.8
403.gcc	440	18.3	<b>440</b>	<b>18.3</b>	435	18.5	423	19.0	<b>424</b>	<b>19.0</b>	425	19.0
429.mcf	<b>277</b>	<b>33.0</b>	276	33.0	277	32.9	261	34.9	<b>262</b>	<b>34.8</b>	262	34.8
445.gobmk	<b>632</b>	<b>16.6</b>	634	16.5	624	16.8	614	17.1	<b>614</b>	<b>17.1</b>	614	17.1
456.hmmer	288	32.3	<b>288</b>	<b>32.4</b>	288	32.4	284	32.9	<b>284</b>	<b>32.9</b>	284	32.8
458.sjeng	667	18.1	<b>668</b>	<b>18.1</b>	672	18.0	653	18.5	654	18.5	<b>653</b>	<b>18.5</b>
462.libquantum	33.7	615	<b>33.7</b>	<b>615</b>	33.7	615	33.7	615	<b>33.7</b>	<b>615</b>	33.7	615
464.h264ref	827	26.8	<b>829</b>	<b>26.7</b>	832	26.6	770	28.7	770	28.8	<b>770</b>	<b>28.7</b>
471.omnetpp	393	15.9	396	15.8	<b>395</b>	<b>15.8</b>	359	17.4	<b>358</b>	<b>17.5</b>	357	17.5
473.astar	435	16.1	442	15.9	<b>437</b>	<b>16.1</b>	435	16.1	442	15.9	<b>437</b>	<b>16.1</b>
483.xalancbmk	<b>273</b>	<b>25.3</b>	273	25.3	273	25.3	<b>273</b>	<b>25.3</b>	273	25.3	273	25.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

```
'mount -t hugetlbfs nodev /mnt/hugepages' was used to enable large pages
echo 900 > /proc/sys/vm/nr_hugepages
export HUGETLB_MORECORE=yes
export LD_PRELOAD=/usr/lib64/libhugetlbfs.so
```

## Platform Notes

BIOS Settings:

Power Management = Maximum Performance (Default = Active Power Controller)  
Data Reuse = Disabled (Default = Enabled)

## General Notes

OMP\_NUM\_THREADS set to number of cores  
The Dell PowerEdge T610 and  
the Bull NovaScale T840 F2 models are electronically equivalent.  
The results have been measured on a Dell PowerEdge T610 model  
Binaries were compiled on RHEL5.5



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T840 F2 (Intel Xeon E5607, 2.26 GHz)

**SPECint2006 = 28.1**

**SPECint\_base2006 = 26.9**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Jun-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Jan-2011

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/smartheap -lsmartheap64
-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT
```

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T840 F2 (Intel Xeon E5607, 2.26 GHz)

**SPECint2006 = 28.1**

**SPECint\_base2006 = 26.9**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Jun-2011

**Hardware Availability:** Feb-2011

**Software Availability:** Jan-2011

## Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

429.mcf: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

471.omnetpp: `icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

401.bzip2: `-DSPEC_CPU_LP64`

403.gcc: `-DSPEC_CPU_LP64`

456.hmmer: `-DSPEC_CPU_LP64`

458.sjeng: `-DSPEC_CPU_LP64`

462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

473.astar: `-DSPEC_CPU_LP64`

483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-opt-prefetch -ansi-alias`  
`-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32`  
`-opt-prefetch -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc`  
`-opt-malloc-options=3 -auto-ilp32`  
`-B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT`

429.mcf: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-auto-ilp32 -ansi-alias`  
`-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

**SPECint2006 = 28.1**

NovaScale T840 F2 (Intel Xeon E5607, 2.26 GHz)

**SPECint\_base2006 = 26.9**

**CPU2006 license:** 20

**Test date:** Jun-2011

**Test sponsor:** Bull SAS

**Hardware Availability:** Feb-2011

**Tested by:** Dell Inc.

**Software Availability:** Jan-2011

## Peak Optimization Flags (Continued)

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
                   -auto-ilp32 -ansi-alias  
                   -B /usr/share/libhugetlbfss/ -Wl,-hugetlbfss-link=BDT

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
                   -ansi-alias  
                   -B /usr/share/libhugetlbfss/ -Wl,-melf\_x86\_64 -Wl,-hugetlbfss-link=BDT

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
                   -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
                   -unroll14

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
                   -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
                   -unroll12 -ansi-alias  
                   -B /usr/share/libhugetlbfss/ -Wl,-hugetlbfss-link=BDT

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
                   -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
                   -opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs  
                   -L/smartheap -lsmartheap  
                   -B /usr/share/libhugetlbfss/ -Wl,-hugetlbfss-link=BDT

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gnu: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.html>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.0-linux64-revB.xml>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20110524.00.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

**SPECint2006 = 28.1**

NovaScale T840 F2 (Intel Xeon E5607, 2.26 GHz)

**SPECint\_base2006 = 26.9**

**CPU2006 license:** 20

**Test date:** Jun-2011

**Test sponsor:** Bull SAS

**Hardware Availability:** Feb-2011

**Tested by:** Dell Inc.

**Software Availability:** Jan-2011

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 23:01:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 16 August 2011.