SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3755 M3 (AMD Opteron 6174)

SPECint®_rate2006 = 393

SPECint_rate_base2006 = 342

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2011
Hardware Availability: Dec-2010
Software Availability: Jul-2010

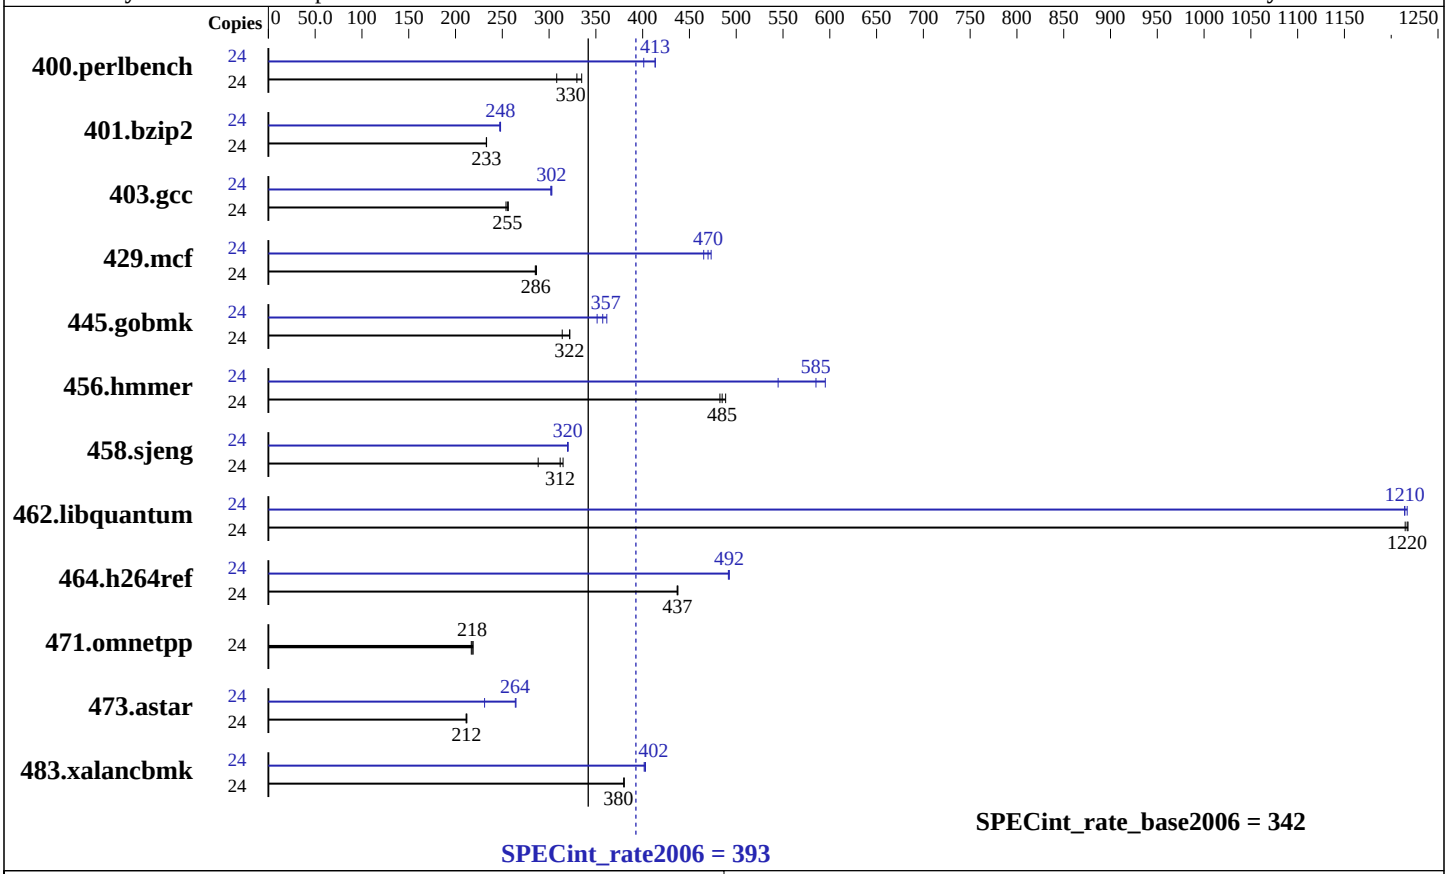

Hardware

CPU Name:	AMD Opteron 6174
CPU Characteristics:	
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip, 6 MB shared / 6 cores
Other Cache:	None
Memory:	64 GB (16 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem:	1 x 250 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 SP1 (x86_64), Kernel 2.6.32.12-0.7-default
Compiler:	x86 Open64 4.2.4 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.1 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3755 M3 (AMD Opteron 6174)

SPECint_rate2006 = 393

SPECint_rate_base2006 = 342

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Sep-2011
Hardware Availability: Dec-2010
Software Availability: Jul-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	700	335	**711**	**330**	761	308	24	584	401	567	414	**567**	**413**
401.bzip2	24	993	233	**993**	**233**	994	233	24	937	247	**934**	**248**	933	248
403.gcc	24	**756**	**255**	753	256	761	254	24	640	302	638	303	**639**	**302**
429.mcf	24	**766**	**286**	764	287	767	285	24	470	465	**466**	**470**	463	473
445.gobmk	24	802	314	782	322	**782**	**322**	24	696	362	**705**	**357**	717	351
456.hmmer	24	464	483	458	489	**462**	**485**	24	376	595	**383**	**585**	411	545
458.sjeng	24	**931**	**312**	922	315	1007	288	24	906	320	908	320	**908**	**320**
462.libquantum	24	408	1220	409	1210	**409**	**1220**	24	410	1210	409	1220	**409**	**1210**
464.h264ref	24	1213	438	**1215**	**437**	1216	437	24	**1079**	**492**	1078	493	1080	492
471.omnetpp	24	692	217	685	219	**689**	**218**	24	692	217	685	219	**689**	**218**
473.astar	24	**796**	**212**	797	211	794	212	24	**638**	**264**	637	265	729	231
483.xalancbmk	24	436	380	436	380	**436**	**380**	24	412	402	411	403	**412**	**402**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

```
BIOS Settings:
 Operating Mode set to Performance Mode
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/root/speccpu_2011-03-22/speccpu_rate_revC-3/amd1002mc-rate-libs-revC/64:/root/speccpu_2011-03-22/speccpu_rate_revC-3/amd1002mc-rate-libs-revC/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64
```

Continued on next page

General Notes (Continued)

Binaries were complied on SLES10 SP2 with binutils 2.18

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=barcelona -mso -Ofast -CG:local_sched_alg=1
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on
-CG:cmp_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-CG:local_sched_alg=1 -CG:unroll_fb_req=on
-HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
-OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
-HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on
-CG:gcm=off -GRA:prioritize_by_density=on -m32
-HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
-LNO:ignore_feedback=off -CG:p2align=on
-CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
-OPT:alias=disjoint -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-CG:local_sched_alg=1 -CG:cflow=0
-CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
-HP:bdt=2m:heap=2m

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
-LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
-IPA:pu_reorder=2 -CG:ptr_load_use=0
-OPT:unroll_times_max=8 -INLINE:aggressive=on

462.libquantum: -march=barcelona -mso -Ofast -LNO:pf2=0 -CG:gcm=off
-CG:use_prefetchnta=on -CG:cmp_peep=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -OPT:alias=disjoint
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
-CG:push_pop_int_saved_regs=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -mso -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
-WOPT:if_conv=0 -GRA:optimize_boundary=on
-OPT:alias=disjoint -INLINE:aggressive=on
-IPA:small_pu=3000 -IPA:plimit=3000 -m32
-HP:bdt=2m:heap=2m

483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32
-CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
-fno-emit-exceptions
-L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20101109.html
http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20101109.xml
http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Thu Jul 24 01:38:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 October 2011.