



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECint<sup>®</sup>\_rate2006 = 287

PRIMERGY TX150 S8, Intel Xeon E5-2450, 2.10 GHz

SPECint\_rate\_base2006 = 276

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2012

Hardware Availability: Jul-2012

Software Availability: Feb-2012

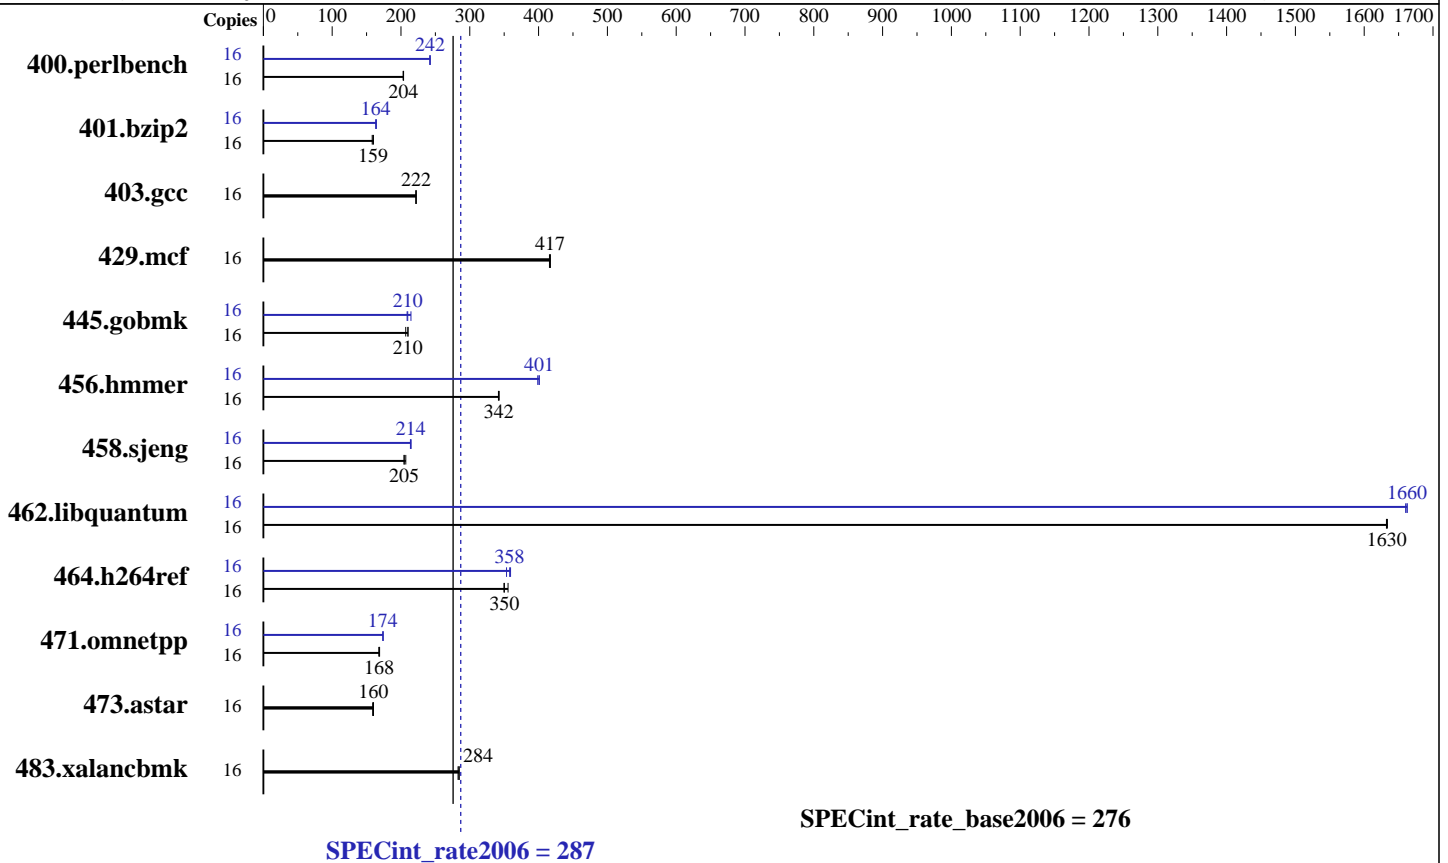

### Hardware

CPU Name: Intel Xeon E5-2450  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (6 x 8 GB 2Rx4 PC3L-12800R-11, ECC)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.293 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECint\_rate2006 = 287

PRIMERGY TX150 S8, Intel Xeon E5-2450, 2.10 GHz

SPECint\_rate\_base2006 = 276

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Jun-2012  
Hardware Availability: Jul-2012  
Software Availability: Feb-2012

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	<b>767</b>	<b>204</b>	767	204	770	203	16	645	242	<b>645</b>	<b>242</b>	646	242
401.bzip2	16	965	160	976	158	<b>969</b>	<b>159</b>	16	941	164	945	163	<b>944</b>	<b>164</b>
403.gcc	16	581	222	580	222	<b>581</b>	<b>222</b>	16	581	222	580	222	<b>581</b>	<b>222</b>
429.mcf	16	<b>350</b>	<b>417</b>	351	416	350	417	16	<b>350</b>	<b>417</b>	351	416	350	417
445.gobmk	16	811	207	<b>799</b>	<b>210</b>	799	210	16	782	214	<b>800</b>	<b>210</b>	803	209
456.hammer	16	437	342	<b>436</b>	<b>342</b>	436	343	16	374	399	372	401	<b>373</b>	<b>401</b>
458.sjeng	16	947	204	<b>946</b>	<b>205</b>	935	207	16	<b>904</b>	<b>214</b>	906	214	902	215
462.libquantum	16	203	1630	<b>203</b>	<b>1630</b>	203	1630	16	199	1660	200	1660	<b>199</b>	<b>1660</b>
464.h264ref	16	1013	350	996	356	<b>1011</b>	<b>350</b>	16	<b>989</b>	<b>358</b>	986	359	1002	353
471.omnetpp	16	596	168	592	169	<b>594</b>	<b>168</b>	16	<b>575</b>	<b>174</b>	575	174	575	174
473.astar	16	707	159	<b>702</b>	<b>160</b>	702	160	16	707	159	<b>702</b>	<b>160</b>	702	160
483.xalancbmk	16	<b>388</b>	<b>284</b>	390	283	388	285	16	<b>388</b>	<b>284</b>	390	283	388	285

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64"

Binaries compiled on a system with 2x E5-2650 CPU + 96 GB memory using RHEL6.2  
For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 287**

PRIMERGY TX150 S8, Intel Xeon E5-2450, 2.10 GHz

**SPECint\_rate\_base2006 = 276**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Jun-2012  
**Hardware Availability:** Jul-2012  
**Software Availability:** Feb-2012

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/opt/SmartHeap/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint\_rate2006 = 287

PRIMERGY TX150 S8, Intel Xeon E5-2450, 2.10 GHz

SPECint\_rate\_base2006 = 276

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2012

Hardware Availability: Jul-2012

Software Availability: Feb-2012

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll4 -auto-ilp32

462.libquantum: -xAVX -ipo -O3 -no-prec-div -opt-prefetch  
 -opt-mem-layout-trans=3

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/opt/SmartHeap/lib -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECint\_rate2006 = 287**

PRIMERGY TX150 S8, Intel Xeon E5-2450, 2.10 GHz

**SPECint\_rate\_base2006 = 276**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Jun-2012

**Hardware Availability:** Jul-2012

**Software Availability:** Feb-2012

## Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 10:51:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 August 2012.