



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer F627R2-F72+  
(X9DRFF-7+ , Intel Xeon E5-2697 v2)

SPECfp®\_rate2006 = 696

SPECfp\_rate\_base2006 = 679

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

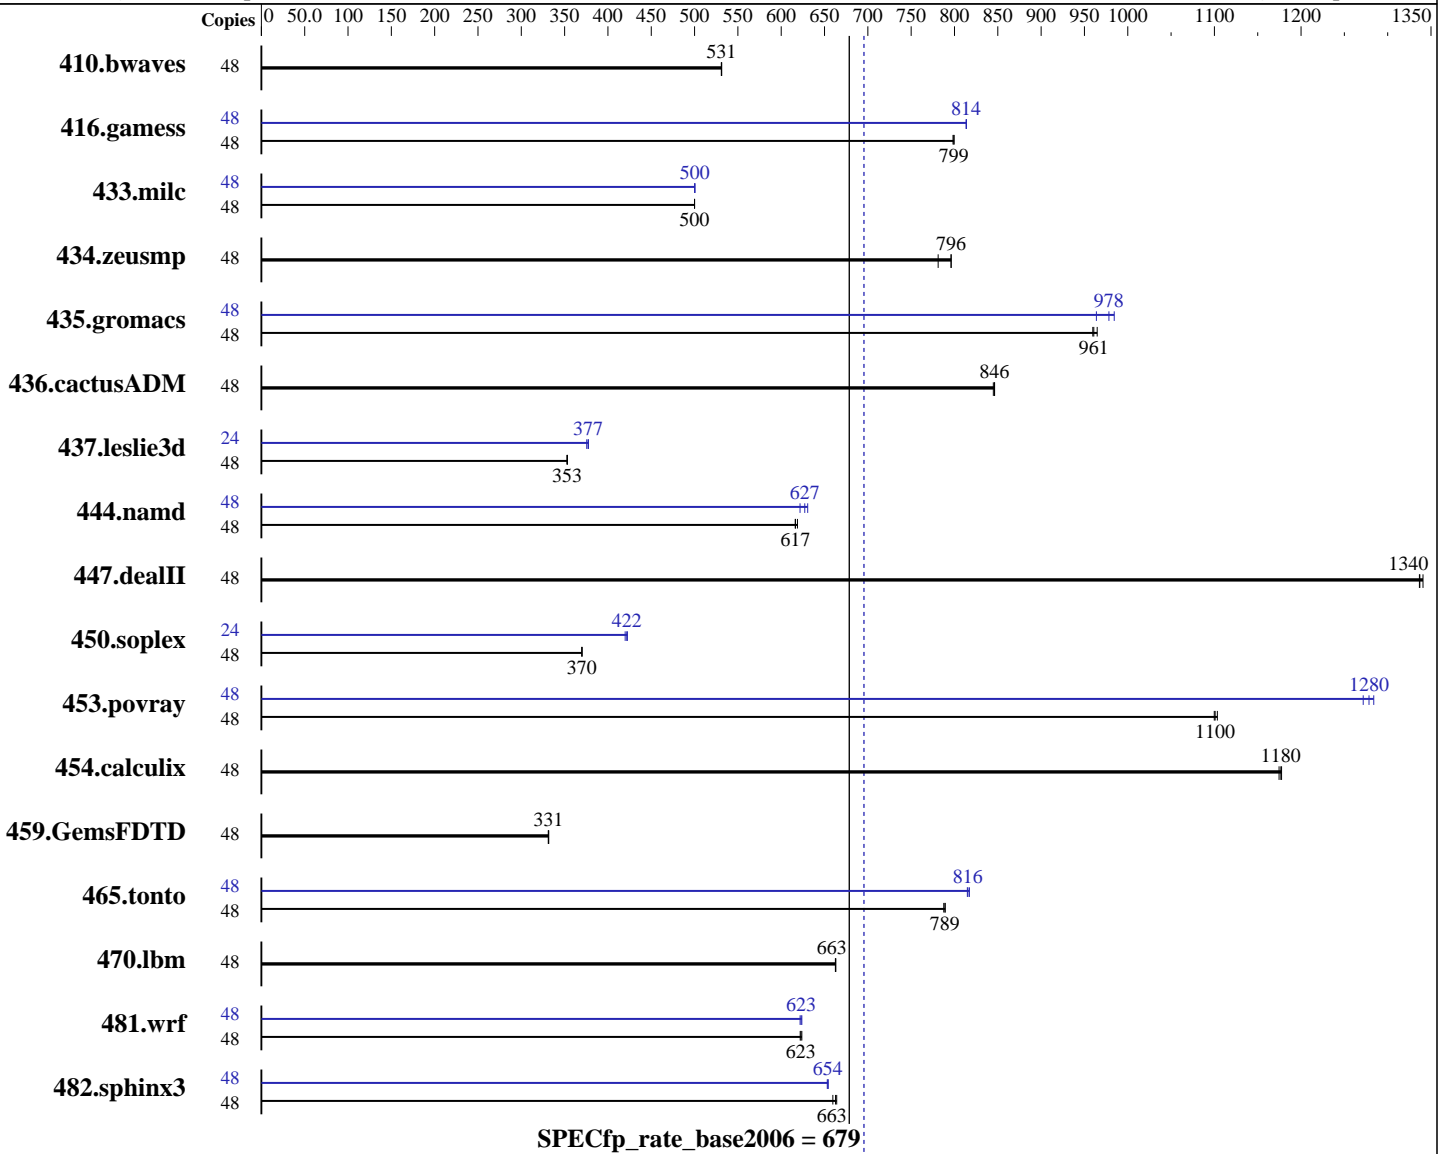

### Hardware

CPU Name: Intel Xeon E5-2697 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4, Kernel 2.6.32-358.18.1.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer F627R2-F72+  
(X9DRFF-7+ , Intel Xeon E5-2697 v2)

SPECfp\_rate2006 = 696

SPECfp\_rate\_base2006 = 679

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

L3 Cache: 30 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC)  
Disk Subsystem: 2 x 400 GB SATA III, RAID0, 7200 RPM  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1229	531	<u>1228</u>	<u>531</u>	1228	531	48	1229	531	<u>1228</u>	<u>531</u>	1228	531
416.gamess	48	1176	800	<u>1176</u>	<u>799</u>	1177	798	48	<u>1155</u>	<u>814</u>	1155	814	1155	814
433.milc	48	<u>881</u>	<u>500</u>	881	500	881	500	48	<u>881</u>	<u>500</u>	881	500	881	500
434.zeusmp	48	<u>549</u>	<u>796</u>	549	796	559	781	48	<u>549</u>	<u>796</u>	549	796	559	781
435.gromacs	48	<u>357</u>	<u>961</u>	357	960	355	965	48	<u>350</u>	<u>978</u>	348	984	356	964
436.cactusADM	48	678	846	<u>678</u>	<u>846</u>	679	845	48	678	846	<u>678</u>	<u>846</u>	679	845
437.leslie3d	48	1279	353	1277	353	<u>1278</u>	<u>353</u>	24	<u>598</u>	<u>377</u>	598	378	601	376
444.namd	48	<u>624</u>	<u>617</u>	625	616	622	619	48	<u>614</u>	<u>627</u>	619	622	610	631
447.dealII	48	410	1340	411	1340	<u>411</u>	<u>1340</u>	48	410	1340	411	1340	<u>411</u>	<u>1340</u>
450.soplex	48	1082	370	<u>1082</u>	<u>370</u>	1082	370	24	474	422	<u>475</u>	<u>422</u>	477	420
453.povray	48	<u>232</u>	<u>1100</u>	232	1100	231	1100	48	201	1270	<u>200</u>	<u>1280</u>	199	1280
454.calculix	48	336	1180	337	1170	<u>337</u>	<u>1180</u>	48	336	1180	337	1170	<u>337</u>	<u>1180</u>
459.GemsFDTD	48	<u>1536</u>	<u>331</u>	1536	332	1538	331	48	<u>1536</u>	<u>331</u>	1536	332	1538	331
465.tonto	48	598	789	600	788	<u>599</u>	<u>789</u>	48	578	817	580	815	<u>579</u>	<u>816</u>
470.lbm	48	<u>995</u>	<u>663</u>	995	663	995	663	48	<u>995</u>	<u>663</u>	995	663	995	663
481.wrf	48	859	624	862	622	<u>861</u>	<u>623</u>	48	859	624	862	622	<u>861</u>	<u>623</u>
482.sphinx3	48	1418	660	1409	664	<u>1412</u>	<u>663</u>	48	<u>1431</u>	<u>654</u>	1432	653	1430	654

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer F627R2-F72+  
(X9DRFF-7+ , Intel Xeon E5-2697 v2)

SPECfp\_rate2006 = 696

SPECfp\_rate\_base2006 = 679

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Sep-2013  
**Hardware Availability:** Sep-2013  
**Software Availability:** Sep-2013

### General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

### Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer F627R2-F72+  
(X9DRFF-7+ , Intel Xeon E5-2697 v2)

SPECfp\_rate2006 = 696

SPECfp\_rate\_base2006 = 679

**CPU2006 license:** 001176  
**Test sponsor:** Supermicro  
**Tested by:** Supermicro

**Test date:** Sep-2013  
**Hardware Availability:** Sep-2013  
**Software Availability:** Sep-2013

## Base Optimization Flags

### C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

### C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

### Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

### Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

## Peak Compiler Invocation

### C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

### C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

### Fortran benchmarks:

ifort -m64

### Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer F627R2-F72+  
(X9DRFF-7+ , Intel Xeon E5-2697 v2)

SPECfp\_rate2006 = 696

SPECfp\_rate\_base2006 = 679

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
 -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer F627R2-F72+  
(X9DRFF-7+ , Intel Xeon E5-2697 v2)

**SPECfp\_rate2006 = 696**

**SPECfp\_rate\_base2006 = 679**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Sep-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 16:49:03 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 1 November 2013.