



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2027TR-H72RF+  
(X9DRT-HF+ , Intel Xeon E5-2697 v2)

SPECfp<sup>®</sup>\_rate2006 = 687

SPECfp\_rate\_base2006 = 668

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

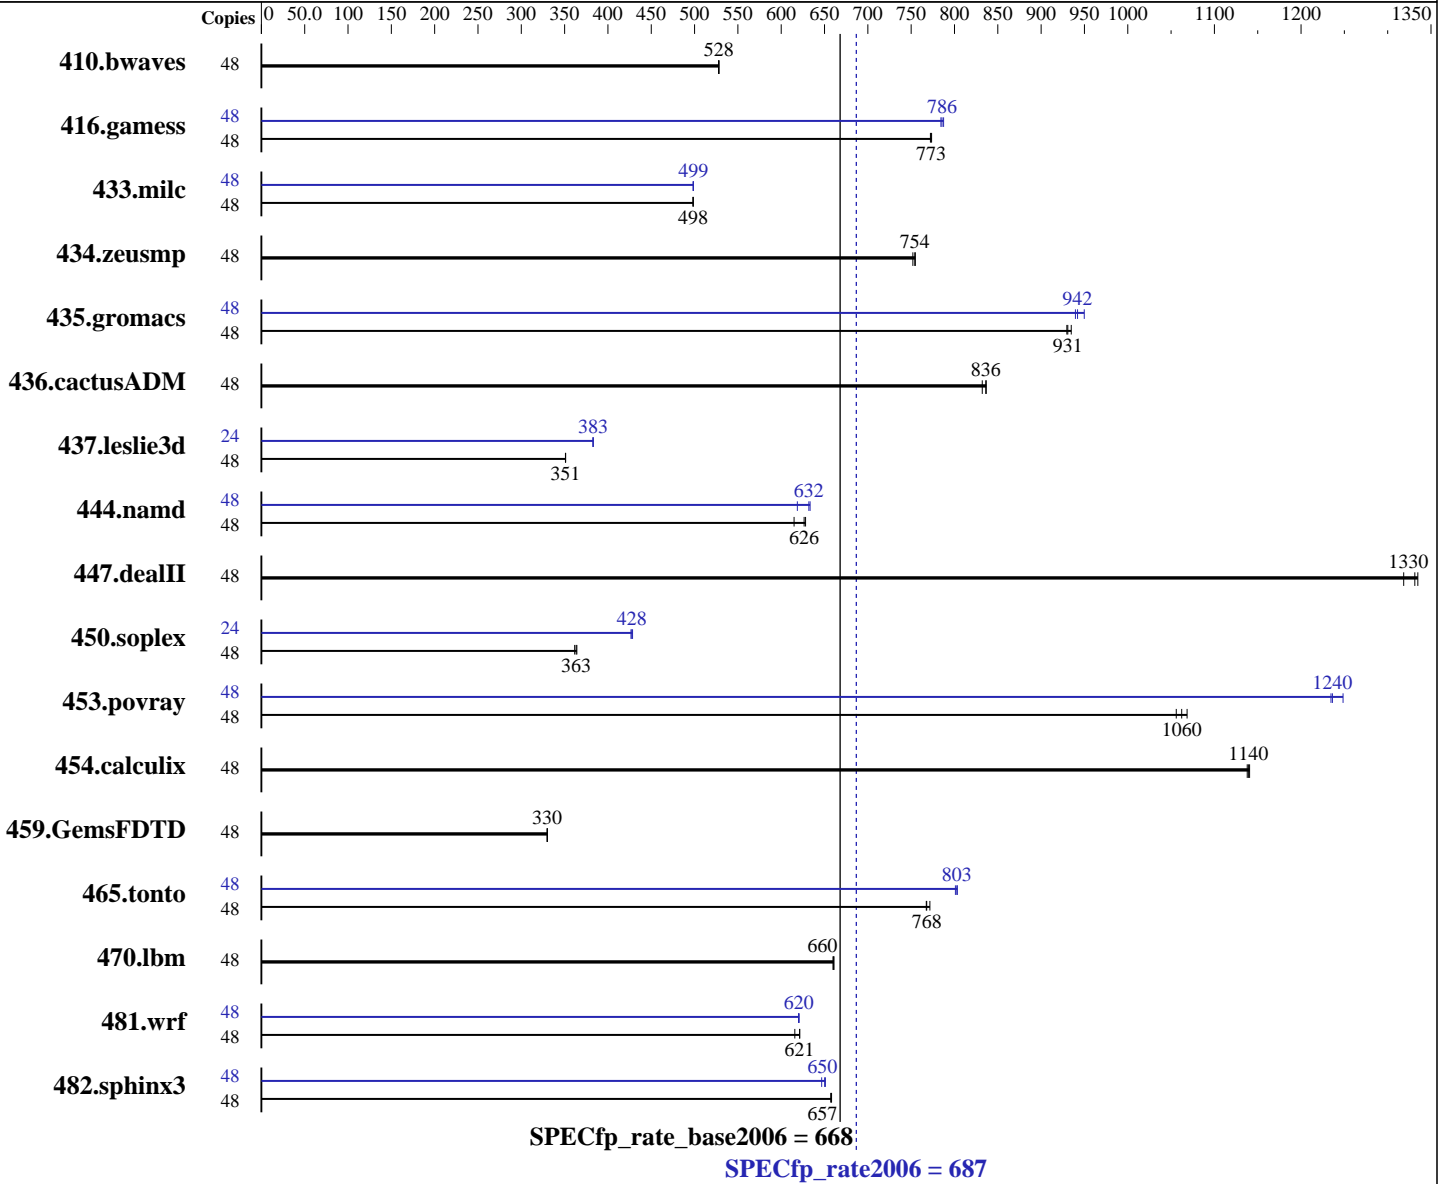

### Hardware

CPU Name: Intel Xeon E5-2697 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 2700  
 FPU: Integrated  
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4, Kernel 2.6.32-358.23.2.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2027TR-H72RF+  
(X9DRT-HF+ , Intel Xeon E5-2697 v2)

SPECfp\_rate2006 = 687

SPECfp\_rate\_base2006 = 668

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

L3 Cache: 30 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC)  
Disk Subsystem: 2 x 256 GB, RAID0, SSD, SATA III  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48	1236	528	<u>1236</u>	<u>528</u>	1235	528	48	1236	528	<u>1236</u>	<u>528</u>	1235	528
416.gamess	48	1217	772	<u>1216</u>	<u>773</u>	1215	774	48	1198	784	1194	787	<u>1196</u>	<u>786</u>
433.milc	48	884	498	<u>884</u>	<u>498</u>	884	498	48	884	499	884	498	<u>884</u>	<u>499</u>
434.zeusmp	48	579	755	<u>579</u>	<u>754</u>	581	752	48	579	755	<u>579</u>	<u>754</u>	581	752
435.gromacs	48	<u>368</u>	<u>931</u>	369	930	367	935	48	361	950	<u>364</u>	<u>942</u>	365	940
436.cactusADM	48	<u>686</u>	<u>836</u>	686	837	689	832	48	<u>686</u>	<u>836</u>	686	837	689	832
437.leslie3d	48	<u>1285</u>	<u>351</u>	1286	351	1285	351	24	589	383	589	383	<u>589</u>	<u>383</u>
444.namd	48	613	628	626	615	<u>615</u>	<u>626</u>	48	608	633	<u>609</u>	<u>632</u>	622	619
447.dealII	48	416	1320	<u>412</u>	<u>1330</u>	411	1330	48	416	1320	<u>412</u>	<u>1330</u>	411	1330
450.soplex	48	1107	362	<u>1102</u>	<u>363</u>	1099	364	24	469	427	467	428	<u>468</u>	<u>428</u>
453.povray	48	239	1070	<u>240</u>	<u>1060</u>	242	1060	48	207	1230	<u>207</u>	<u>1240</u>	205	1250
454.calculix	48	<u>348</u>	<u>1140</u>	347	1140	348	1140	48	<u>348</u>	<u>1140</u>	347	1140	348	1140
459.GemsFDTD	48	<u>1543</u>	<u>330</u>	1544	330	1543	330	48	<u>1543</u>	<u>330</u>	1544	330	1543	330
465.tonto	48	615	767	<u>615</u>	<u>768</u>	612	772	48	590	801	588	803	<u>588</u>	<u>803</u>
470.lbm	48	998	661	1000	660	<u>999</u>	<u>660</u>	48	998	661	1000	660	<u>999</u>	<u>660</u>
481.wrf	48	<u>863</u>	<u>621</u>	871	616	863	621	48	864	621	865	620	<u>864</u>	<u>620</u>
482.sphinx3	48	1422	658	1423	657	<u>1423</u>	<u>657</u>	48	1437	651	<u>1439</u>	<u>650</u>	1447	647

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu/libs/32:/home/cpu/libs/64:/home/cpu/sh"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2027TR-H72RF+  
(X9DRT-HF+ , Intel Xeon E5-2697 v2)

SPECfp\_rate2006 = 687

SPECfp\_rate\_base2006 = 668

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Oct-2013  
Hardware Availability: Sep-2013  
Software Availability: Sep-2013

### General Notes (Continued)

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

### Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2027TR-H72RF+  
(X9DRT-HF+ , Intel Xeon E5-2697 v2)

SPECfp\_rate2006 = 687

SPECfp\_rate\_base2006 = 668

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Oct-2013  
Hardware Availability: Sep-2013  
Software Availability: Sep-2013

## Base Optimization Flags

### C benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

### C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

### Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

### Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

## Peak Compiler Invocation

### C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

### C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

### Fortran benchmarks:

ifort -m64

### Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2027TR-H72RF+  
(X9DRT-HF+ , Intel Xeon E5-2697 v2)

SPECfp\_rate2006 = 687

SPECfp\_rate\_base2006 = 668

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Oct-2013  
Hardware Availability: Sep-2013  
Software Availability: Sep-2013

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
-unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

SuperServer 2027TR-H72RF+  
(X9DRT-HF+ , Intel Xeon E5-2697 v2)

SPECfp\_rate2006 = 687

SPECfp\_rate\_base2006 = 668

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Oct-2013

Hardware Availability: Sep-2013

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-V1.2-revB.20130719.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 19:16:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 November 2013.