



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 200 X5 (Intel Xeon E5-2609 v2, 2.50 GHz)

**SPECfp®\_rate2006 = 258**

**SPECfp\_rate\_base2006 = 256**

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Apr-2014

Hardware Availability: Oct-2013

Software Availability: Sep-2013

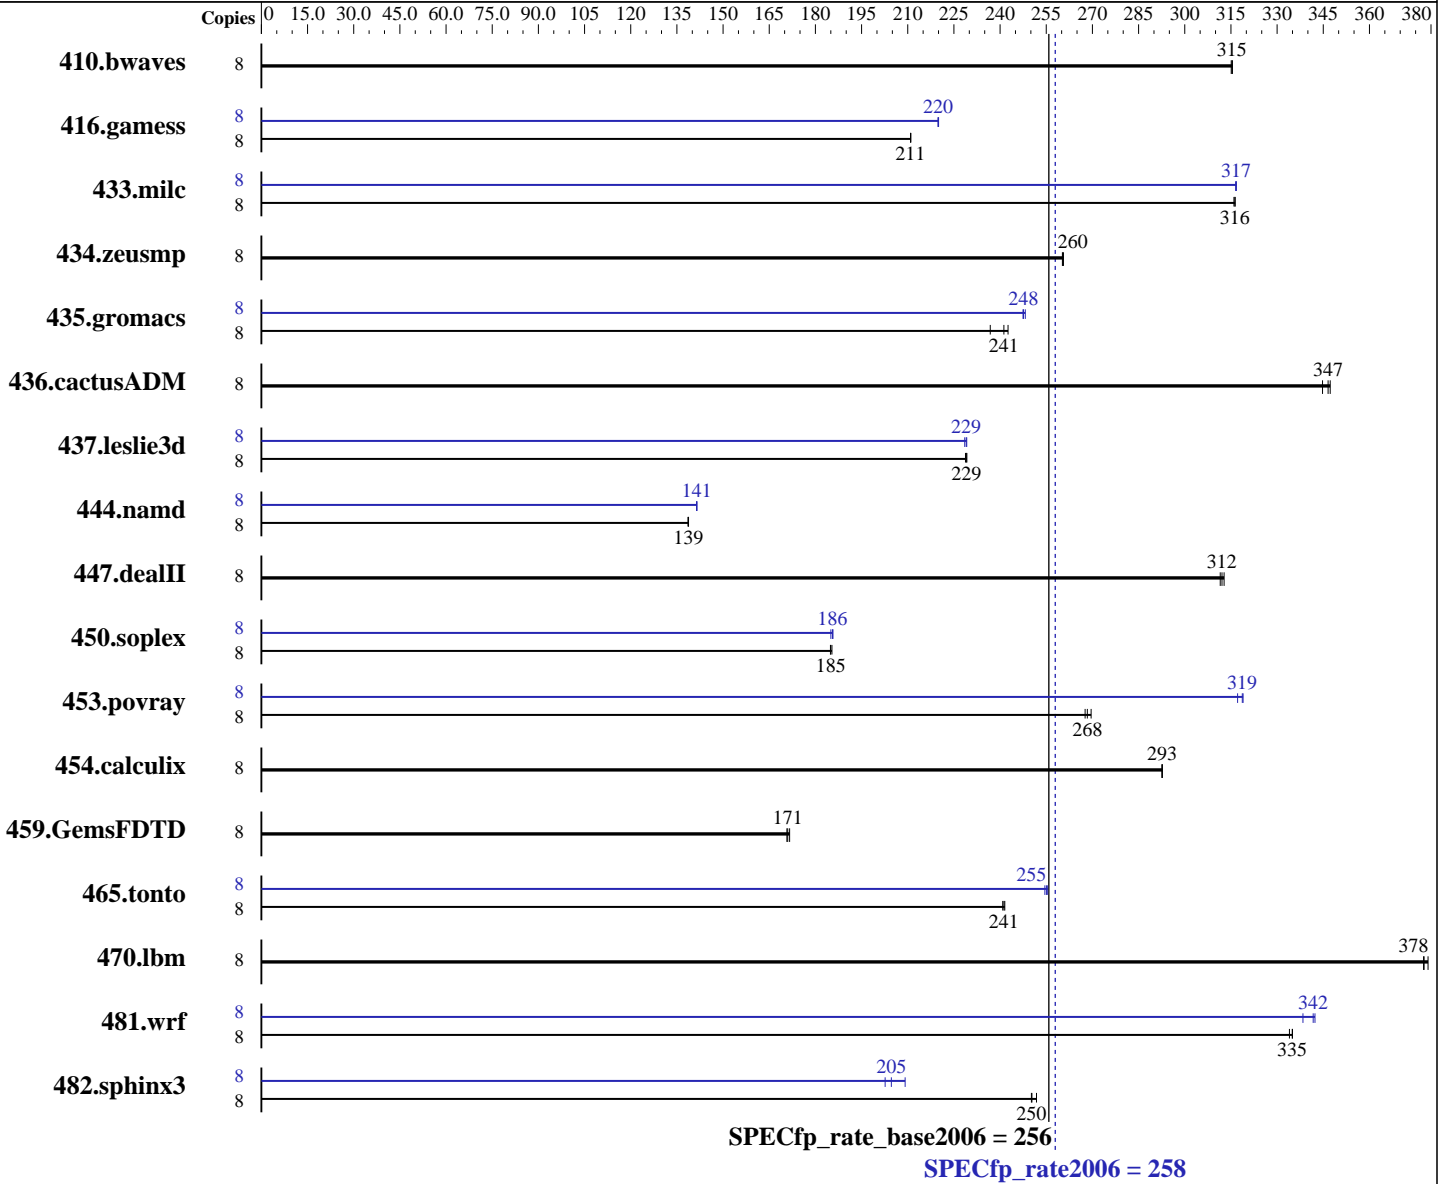

### Hardware

CPU Name: Intel Xeon E5-2609 v2  
 CPU Characteristics:  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.11.1.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 200 X5 (Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp\_rate2006 = 258

SPECfp\_rate\_base2006 = 256

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Apr-2014

Hardware Availability: Oct-2013

Software Availability: Sep-2013

L3 Cache: 10 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz and CL9)  
Disk Subsystem: 1 x 240 GB SATA II SSD  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	8	<b>345</b>	<b>315</b>	345	315	345	315	8	<b>345</b>	<b>315</b>	345	315	345	315		
416.gamess	8	742	211	743	211	<b>743</b>	<b>211</b>	8	713	220	<b>712</b>	<b>220</b>	712	220		
433.milc	8	232	316	<b>232</b>	<b>316</b>	232	316	8	232	317	232	317	<b>232</b>	<b>317</b>		
434.zeusmp	8	280	260	279	261	<b>280</b>	<b>260</b>	8	280	260	279	261	<b>280</b>	<b>260</b>		
435.gromacs	8	<b>237</b>	<b>241</b>	241	237	235	243	8	230	248	231	247	<b>231</b>	<b>248</b>		
436.cactusADM	8	277	345	<b>276</b>	<b>347</b>	275	347	8	277	345	<b>276</b>	<b>347</b>	275	347		
437.leslie3d	8	<b>328</b>	<b>229</b>	328	229	329	229	8	<b>328</b>	<b>229</b>	329	229	328	229		
444.namd	8	462	139	463	139	<b>462</b>	<b>139</b>	8	453	142	<b>454</b>	<b>141</b>	454	141		
447.dealII	8	293	313	<b>293</b>	<b>312</b>	294	312	8	293	313	<b>293</b>	<b>312</b>	294	312		
450.soplex	8	361	185	<b>361</b>	<b>185</b>	360	185	8	359	186	361	185	<b>360</b>	<b>186</b>		
453.povray	8	158	270	<b>159</b>	<b>268</b>	159	268	8	133	319	<b>134</b>	<b>319</b>	134	317		
454.calculix	8	226	293	225	293	<b>226</b>	<b>293</b>	8	226	293	225	293	<b>226</b>	<b>293</b>		
459.GemsFDTD	8	<b>496</b>	<b>171</b>	495	172	497	171	8	<b>496</b>	<b>171</b>	495	172	497	171		
465.tonto	8	<b>326</b>	<b>241</b>	326	242	327	241	8	308	255	<b>309</b>	<b>255</b>	309	255		
470.lbm	8	<b>291</b>	<b>378</b>	291	378	290	379	8	<b>291</b>	<b>378</b>	291	378	290	379		
481.wrf	8	268	334	267	335	<b>267</b>	<b>335</b>	8	264	338	<b>261</b>	<b>342</b>	261	342		
482.sphinx3	8	623	250	619	252	<b>623</b>	<b>250</b>	8	<b>762</b>	<b>205</b>	745	209	769	203		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 200 X5 (Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp\_rate2006 = 258

SPECfp\_rate\_base2006 = 256

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Apr-2014

Hardware Availability: Oct-2013

Software Availability: Sep-2013

## Platform Notes

### Bios Settings:

System Acoustic and Performance Configuration = Performance  
Select Memory RAS Configuration = Maximum Performance  
Intel(R) Turbo Boost Technology = Enabled  
Processor C3 = Disabled  
Processor C6 = Disabled

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on localhost.localdomain Wed Apr 2 12:27:17 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

### From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E5-2609 v2 @ 2.50GHz
 2 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores    : 4
  siblings     : 4
  physical 0: cores 0 1 2 3
  physical 1: cores 0 1 2 3
 cache size   : 10240 KB
```

### From /proc/meminfo

```
MemTotal:      132053000 kB
HugePages_Total: 0
Hugepagesize:  2048 kB
```

### /usr/bin/lsb\_release -d

```
Red Hat Enterprise Linux Server release 6.4 (Santiago)
```

### From /etc/\*release\* /etc/\*version\*

```
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

### uname -a:

```
Linux localhost.localdomain 2.6.32-358.11.1.el6.x86_64 #1 SMP Tue Nov 19 17:43:04 CET 2013 x86_64 x86_64 x86_64 GNU/Linux
```

### run-level 3 Mar 27 14:51

### SPEC is set to: /cpu2006.1.2

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal        ext4      193G  58G  126G  32% /
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

**SPECfp\_rate2006 = 258**

ACTINA SOLAR 200 X5 (Intel Xeon E5-2609 v2, 2.50 GHz)

**SPECfp\_rate\_base2006 = 256**

**CPU2006 license:** 9008

**Test date:** Apr-2014

**Test sponsor:** ACTION S.A.

**Hardware Availability:** Oct-2013

**Tested by:** ACTION S.A.

**Software Availability:** Sep-2013

## Platform Notes (Continued)

Additional information from dmidecode:

BIOS Intel Corp. SE5C600.86B.02.02.0002.122320131210 12/23/2013

Memory:

16x 8 GB

16x Hynix HMT31GR7EFR4C-RD 8 GB 1867 MHz 2 rank

(End of data from sysinfo program)

dmidecode does not properly detect memory modules

16 modules of 8 GB were used to run the test (128 GB total).

Memory modules operate at speed 1333 MHz while dmidecode shows 1867 MHz

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop\_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Binaries compiled on a system with 2x Xeon E5-2650 v2 chips + 256 GB memory using RedHat EL 6.4

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 200 X5 (Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp\_rate2006 = 258

SPECfp\_rate\_base2006 = 256

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Apr-2014

Hardware Availability: Oct-2013

Software Availability: Sep-2013

## Base Portability Flags (Continued)

```

436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

C++ benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

Fortran benchmarks:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch

```

Benchmarks using both Fortran and C:

```

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias
-opt-mem-layout-trans=3

```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
482.sphinx3: icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

```
450.soplex: icpc -m32
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 200 X5 (Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp\_rate2006 = 258

SPECfp\_rate\_base2006 = 256

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Apr-2014

Hardware Availability: Oct-2013

Software Availability: Sep-2013

## Peak Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
 -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
 -prof-use(pass 2) -opt-malloc-options=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 200 X5 (Intel Xeon E5-2609 v2, 2.50 GHz)

SPECfp\_rate2006 = 258

SPECfp\_rate\_base2006 = 256

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Apr-2014

Hardware Availability: Oct-2013

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-apr-2014-For-Intel-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-apr-2014-For-Intel-Platform.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ACTION S.A.**

ACTINA SOLAR 200 X5 (Intel Xeon E5-2609 v2, 2.50 GHz)

**SPECfp\_rate2006 = 258**

**SPECfp\_rate\_base2006 = 256**

**CPU2006 license:** 9008

**Test sponsor:** ACTION S.A.

**Tested by:** ACTION S.A.

**Test date:** Apr-2014

**Hardware Availability:** Oct-2013

**Software Availability:** Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 23:26:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 April 2014.