



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp®2006 = 54.0

Intel DQ77MK motherboard (Intel Core i5-3330S)

SPECfp_base2006 = 52.1

CPU2006 license: 13


Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Nov-2012

Tested by: Intel Corporation

Software Availability: Apr-2013

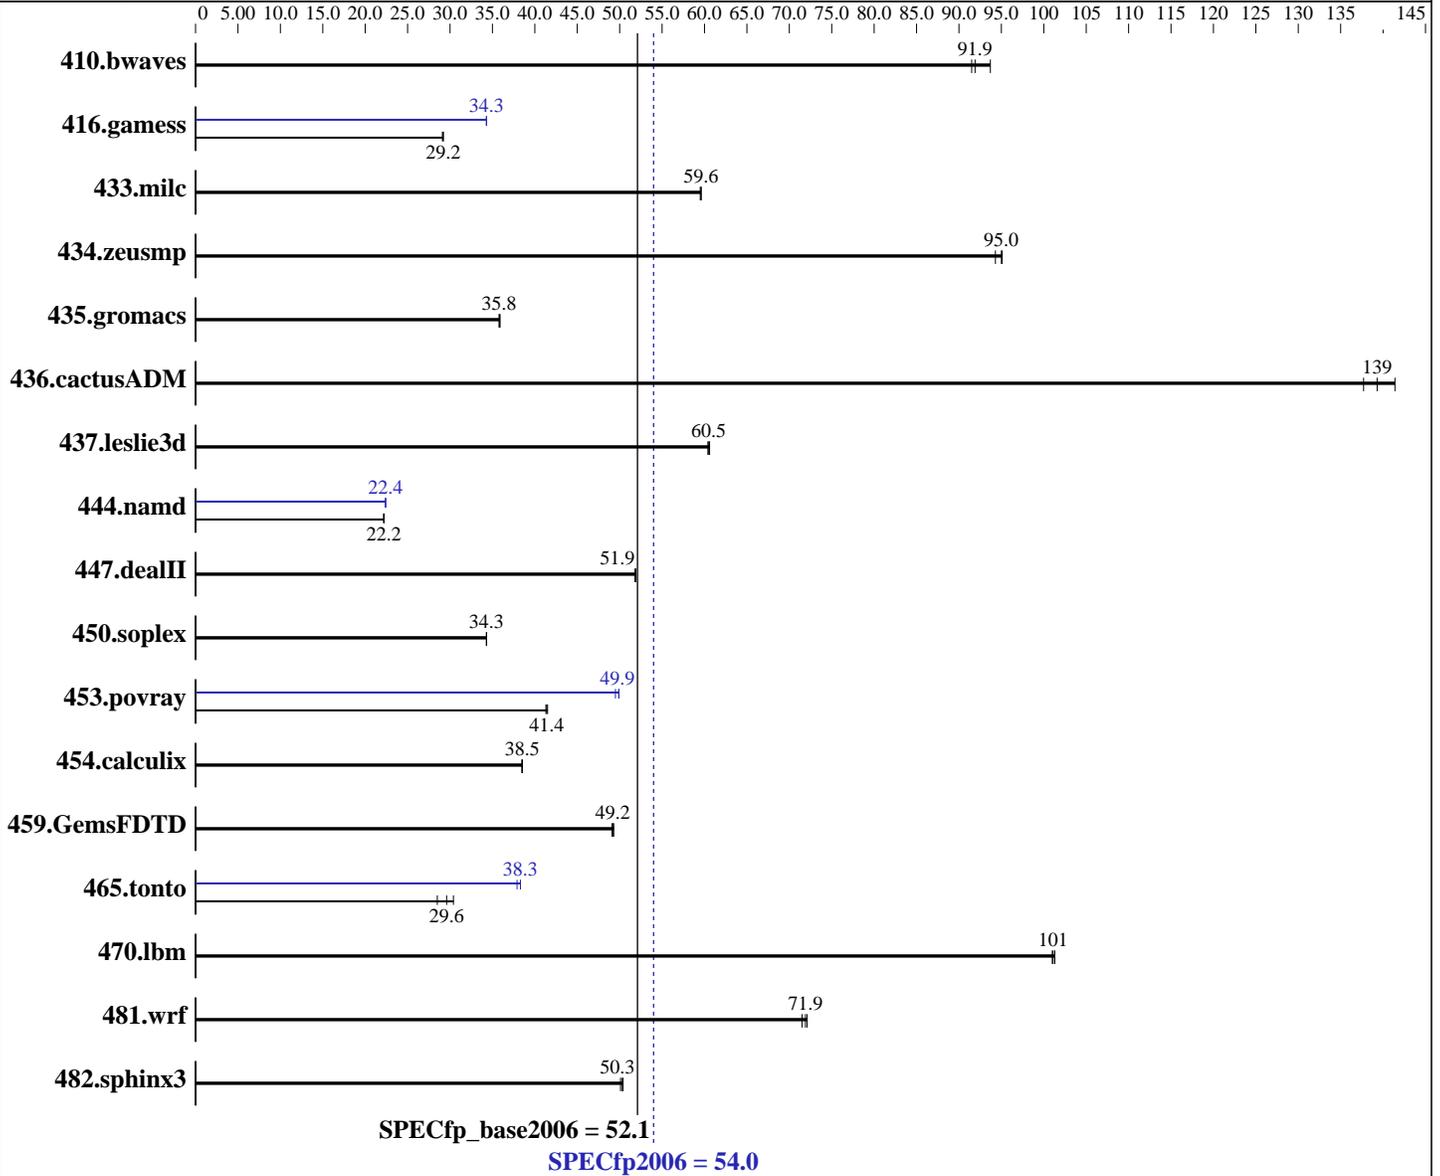

Hardware

CPU Name: Intel Core i5-3330S
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Microsoft Windows 7 Enterprise 6.1.7601 Service Pack 1 Build 7601
 Compiler: C/C++: Version 13.1.1.171 of Intel C++ Studio XE for Windows;
 Fortran: Version 13.1.1.171 of Intel Fortran Studio XE for Windows;
 Libraries: Version 16.00.30319.01 of Microsoft Visual Studio 2010 Professional SP1
 Auto Parallel: Yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = **54.0**

Intel DQ77MK motherboard (Intel Core i5-3330S)

SPECfp_base2006 = **52.1**

CPU2006 license: 13

Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Nov-2012

Tested by: Intel Corporation

Software Availability: Apr-2013

L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 4 GB (2 x 2 GB 1Rx8 PC3-12800U-11)
 Disk Subsystem: 250 GB Seagate SATA HDD, 7200 RPM
 Other Hardware: None

File System: NTFS
 System State: Default
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: SmartHeap Library Version 10.0 from <http://www.microquill.com/>

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	145	93.7	149	91.5	148	91.9	145	93.7	149	91.5	148	91.9
416.gamess	672	29.1	672	29.2	672	29.2	571	34.3	571	34.3	571	34.3
433.milc	154	59.5	154	59.6	154	59.6	154	59.5	154	59.6	154	59.6
434.zeusmp	96.5	94.3	95.7	95.1	95.8	95.0	96.5	94.3	95.7	95.1	95.8	95.0
435.gromacs	199	35.9	200	35.8	199	35.8	199	35.9	200	35.8	199	35.8
436.cactusADM	84.5	141	85.8	139	86.8	138	84.5	141	85.8	139	86.8	138
437.leslie3d	155	60.6	155	60.5	156	60.4	155	60.6	155	60.5	156	60.4
444.namd	361	22.2	361	22.2	361	22.2	357	22.4	357	22.4	357	22.4
447.dealII	221	51.9	221	51.8	221	51.9	221	51.9	221	51.8	221	51.9
450.soplex	243	34.3	244	34.3	243	34.3	243	34.3	244	34.3	243	34.3
453.povray	129	41.3	128	41.5	129	41.4	107	49.9	107	49.9	108	49.5
454.calculix	214	38.5	214	38.5	214	38.5	214	38.5	214	38.5	214	38.5
459.GemsFDTD	216	49.2	216	49.1	215	49.3	216	49.2	216	49.1	215	49.3
465.tonto	345	28.5	324	30.4	332	29.6	257	38.3	257	38.3	260	37.9
470.lbm	136	101	136	101	136	101	136	101	136	101	136	101
481.wrf	155	72.1	156	71.5	155	71.9	155	72.1	156	71.5	155	71.9
482.sphinx3	387	50.3	387	50.4	389	50.1	387	50.3	387	50.4	389	50.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

To compile these binaries, the Intel Compiler 13.1 was set up to generate 64-bit binaries with the command:
 "ipsxe-comp-vars.bat intel64 vs2010" (shortcut provided in the Intel(r) Parallel Studio XE 2013 program folder)

Platform Notes

Sysinfo program C:\SPEC13.1\Docs\sysinfo
 \$Rev: 6775 \$ \$Date:: 2011-08-16 #\$ \8787f7622badcf24e01c368b1db4377c
 running on Clt7054D2179849 Thu Nov 7 19:37:12 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 54.0

Intel DQ77MK motherboard (Intel Core i5-3330S)

SPECfp_base2006 = 52.1

CPU2006 license: 13

Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Nov-2012

Tested by: Intel Corporation

Software Availability: Apr-2013

Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Trying 'systeminfo'

```

OS Name      : Microsoft Windows 7 Enterprise
OS Version   : 6.1.7601 Service Pack 1 Build 7601
System Manufacturer: INTEL_
System Model  : DQ77MK__
Processor(s) : 1 Processor(s) Installed.
               [01]: Intel64 Family 6 Model 58 Stepping 8 GenuineIntel ~2701 Mhz
BIOS Version : Intel Corp. MKQ7710H.86A.0054.2012.1120.1444, 11/20/2012
Total Physical Memory: 3,912 MB

```

Trying 'wmic cpu get /value'

```

DeviceID      : CPU0
L2CacheSize   : 1024
L3CacheSize   : 6144
MaxClockSpeed : 2701
Name          : Intel(R) Core(TM) i5-3330S CPU @ 2.70GHz
NumberOfCores : 4
NumberOfLogicalProcessors: 4

```

(End of data from sysinfo program)

BIOS: SATA mode set to RAID

Windows Disk Driver: Intel Rapid Storage Technology 12.5.0.1066

Windows Chipset Driver: Intel Chipset Driver 9.4.0.1027

Component Notes

Tested systems can be used with Shin-G ATX case,
 PC Power and Cooling 1200W power supply
 Micron MT8JTF25664AZ-1G6 Series Memory DIMMs

General Notes

OMP_NUM_THREADS set to number of processors cores
 KMP_AFFINITY set to granularity=fine,scatter
 Binaries compiled on a system with 1x Intel Core i7-860 CPU
 + 8GB memory using Windows 7 Enterprise 64-bit

Base Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 54.0

Intel DQ77MK motherboard (Intel Core i5-3330S)

SPECfp_base2006 = 52.1

CPU2006 license: 13

Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Nov-2012

Tested by: Intel Corporation

Software Availability: Apr-2013

Base Compiler Invocation (Continued)

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64
 416.gamess: -DSPEC_CPU_P64
 433.milc: -DSPEC_CPU_P64
 434.zeusmp: -DSPEC_CPU_P64
 435.gromacs: -DSPEC_CPU_P64
 436.cactusADM: -DSPEC_CPU_P64 -names:lowercase /assume:underscore
 437.leslie3d: -DSPEC_CPU_P64
 444.namd: -DSPEC_CPU_P64 /TP
 447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
 -Qoption,cpp,--ms_incompat_treatment_of_commas_in_macros
 450.soplex: -DSPEC_CPU_P64
 453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_NEED_INVHYP -DNEED_INVHYP
 454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -names:lowercase
 459.GemsFDTD: -DSPEC_CPU_P64
 465.tonto: -DSPEC_CPU_P64
 470.lbm: -DSPEC_CPU_P64
 481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000

C++ benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlw64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
/F1000000000

Benchmarks using both Fortran and C:

-QxAVX -Qipo -O3 -Qprec-div- -Qparallel -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F1000000000



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 54.0

Intel DQ77MK motherboard (Intel Core i5-3330S)

SPECfp_base2006 = 52.1

CPU2006 license: 13

Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Nov-2012

Tested by: Intel Corporation

Software Availability: Apr-2013

Peak Compiler Invocation

C benchmarks:

icl -Qvc10 -Qstd=c99

C++ benchmarks:

icl -Qvc10

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc10 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000 sh1W64M.lib
-link /FORCE:MULTIPLE

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32
/F1000000000 sh1W64M.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep-
/F1000000000

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 54.0

Intel DQ77MK motherboard (Intel Core i5-3330S)

SPECfp_base2006 = 52.1

CPU2006 license: 13

Test date: Nov-2013

Test sponsor: Intel Corporation

Hardware Availability: Nov-2012

Tested by: Intel Corporation

Software Availability: Apr-2013

Peak Optimization Flags (Continued)

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -QxAVX(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo
-O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-calloc
/F1000000000

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic13.1-official-windows.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Tue Sep 9 10:56:21 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 15 July 2014.