



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 81.0

Express5800/GT110g-S (Intel Pentium G3240)

SPECint_rate_base2006 = 78.1

CPU2006 license: 9006


Test date: Jun-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

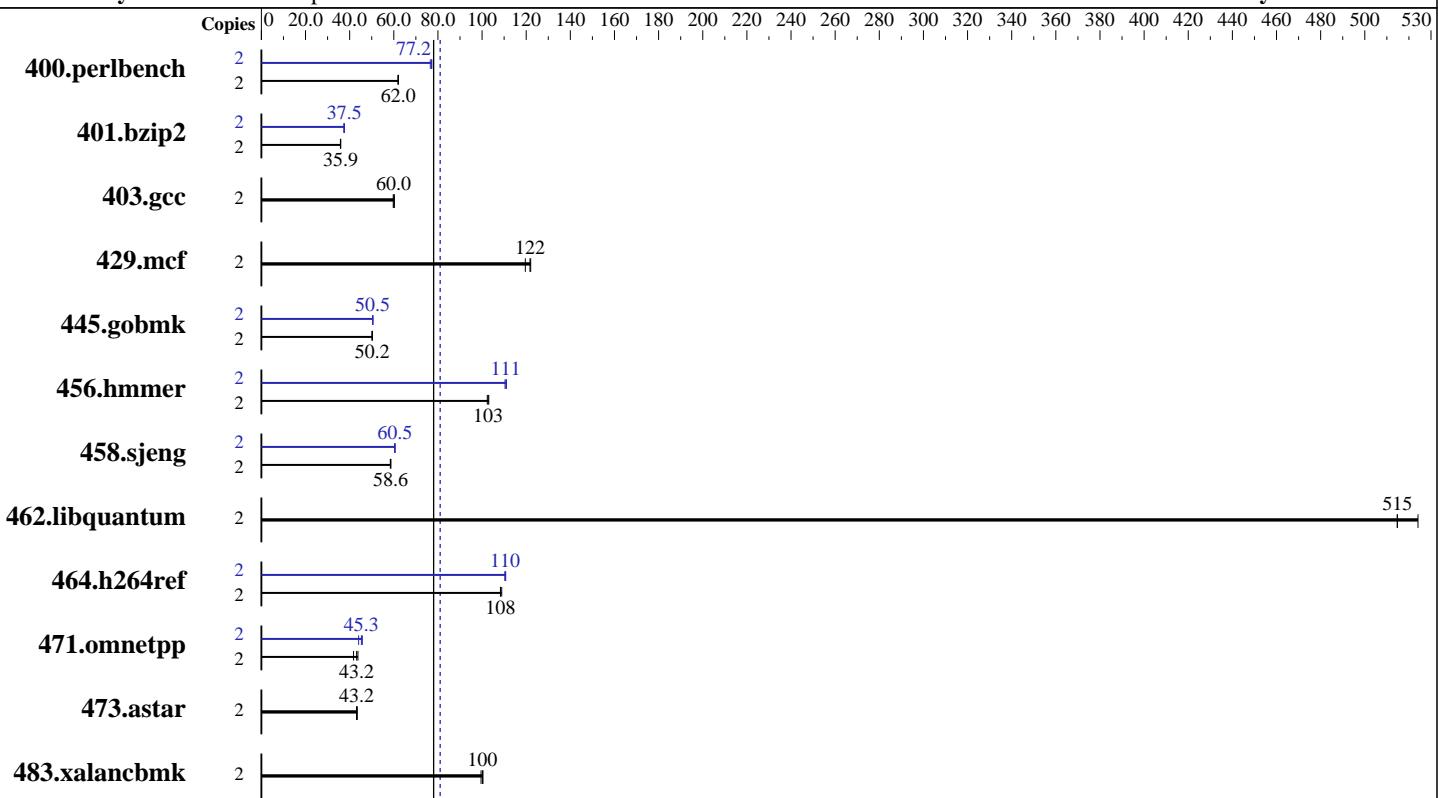

SPECint_rate_base2006 = 78.1

SPECint_rate2006 = 81.0

Hardware

CPU Name:	Intel Pentium G3240
CPU Characteristics:	
CPU MHz:	3100
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	3 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC, running at 1333 MHz and CL9)
Disk Subsystem:	1 x 250 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago)
Compiler:	Kernel 2.6.32-431.el6.x86_64
Auto Parallel:	C/C++: Version 14.0.2.144 of Intel C++ Studio XE for Linux
File System:	No
System State:	ext4
Base Pointers:	Run level 3 (multi-user)
Peak Pointers:	32-bit
Other Software:	32/64-bit
	Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT110g-S (Intel Pentium G3240)

SPECint_rate2006 = 81.0

CPU2006 license: 9006

Test date: Jun-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	315	62.0	316	61.9	315	62.1	2	255	76.5	253	77.2	253	77.2
401.bzip2	2	539	35.8	538	35.9	537	36.0	2	514	37.5	513	37.6	516	37.4
403.gcc	2	267	60.3	269	59.8	268	60.0	2	267	60.3	269	59.8	268	60.0
429.mcf	2	153	120	149	122	150	122	2	153	120	149	122	150	122
445.gobmk	2	418	50.2	418	50.1	417	50.3	2	416	50.5	415	50.5	416	50.5
456.hammer	2	182	103	181	103	182	102	2	168	111	169	110	168	111
458.sjeng	2	413	58.6	412	58.7	414	58.4	2	401	60.4	399	60.6	400	60.5
462.libquantum	2	80.5	515	79.1	524	80.5	515	2	80.5	515	79.1	524	80.5	515
464.h264ref	2	406	109	409	108	408	108	2	401	110	400	111	401	110
471.omnetpp	2	290	43.2	286	43.8	299	41.8	2	276	45.3	273	45.7	284	44.1
473.astar	2	325	43.1	323	43.4	325	43.2	2	325	43.1	323	43.4	325	43.2
483.xalancbmk	2	137	100	138	100	139	99.5	2	137	100	138	100	139	99.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:

Energy Performance: Performance

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1 > /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT110g-S (Intel Pentium G3240)

SPECint_rate2006 = 81.0

CPU2006 license: 9006

Test date: Jun-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

Base Compiler Invocation

C benchmarks:

`icc -m32`

C++ benchmarks:

`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

462.libquantum: `-DSPEC_CPU_LINUX`

483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 81.0

Express5800/GT110g-S (Intel Pentium G3240)

SPECint_rate_base2006 = 78.1

CPU2006 license: 9006

Test date: Jun-2014

Test sponsor: NEC Corporation

Hardware Availability: Jul-2014

Tested by: NEC Corporation

Software Availability: Jan-2014

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/GT110g-S (Intel Pentium G3240)

SPECint_rate2006 = 81.0

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Jun-2014

Hardware Availability: Jul-2014

Software Availability: Jan-2014

Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=__alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120-RevB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Aug 26 18:10:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 August 2014.