



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 1230**

Huawei RH2288 V3 (Intel Xeon E5-2697 v3)

**SPECint\_rate\_base2006 = 1190**

CPU2006 license: 3175


**Test date:** Sep-2014

**Test sponsor:** Huawei

**Hardware Availability:** Sep-2014

**Tested by:** Huawei

**Software Availability:** Nov-2013

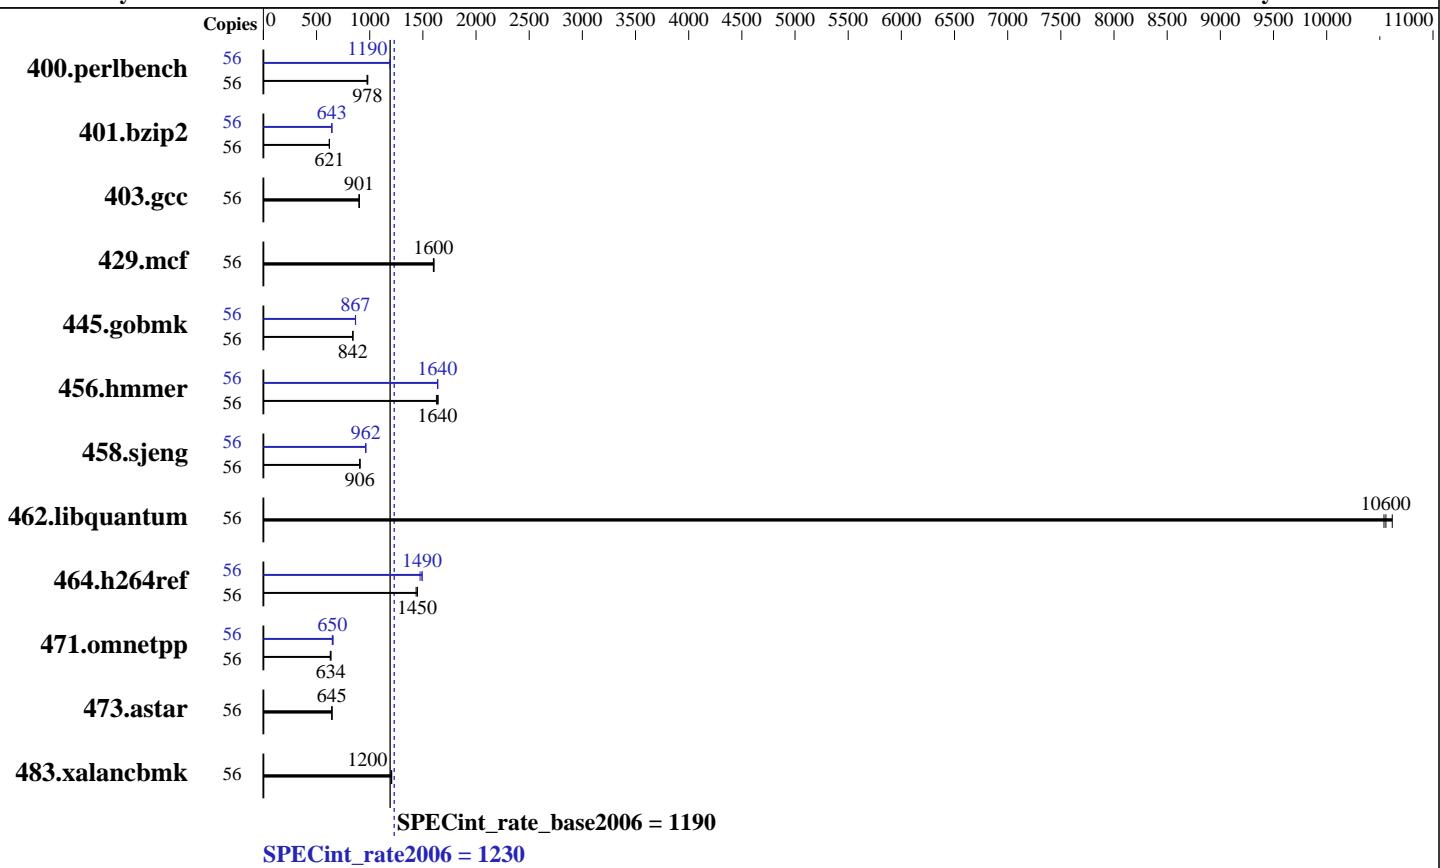

## Hardware

CPU Name: Intel Xeon E5-2697 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
CPU MHz: 2600  
FPU: Integrated  
CPU(s) enabled: 28 cores, 2 chips, 14 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 35 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 500 GB SATA, 7200 RPM  
Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
Compiler: 2.6.32-431.el6.x86\_64  
C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
Auto Parallel: No  
File System: ext4  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 1230**

Huawei RH2288 V3 (Intel Xeon E5-2697 v3)

**SPECint\_rate\_base2006 = 1190**

CPU2006 license: 3175

Test date: Sep-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Nov-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	56	557	982	561	976	<b>560</b>	<b>978</b>	56	460	1190	458	1190	<b>459</b>	<b>1190</b>
401.bzip2	56	870	621	871	621	<b>871</b>	<b>621</b>	56	<b>840</b>	<b>643</b>	838	645	<b>841</b>	643
403.gcc	56	501	899	<b>500</b>	<b>901</b>	499	904	56	501	899	<b>500</b>	<b>901</b>	499	904
429.mcf	56	<b>319</b>	<b>1600</b>	319	1600	318	1610	56	<b>319</b>	<b>1600</b>	319	1600	318	1610
445.gobmk	56	699	841	<b>698</b>	<b>842</b>	698	842	56	679	866	677	867	<b>678</b>	<b>867</b>
456.hammer	56	<b>319</b>	<b>1640</b>	321	1630	318	1640	56	<b>319</b>	<b>1640</b>	319	1640	318	1640
458.sjeng	56	748	905	744	910	<b>748</b>	<b>906</b>	56	<b>704</b>	<b>962</b>	704	962	703	964
462.libquantum	56	<b>110</b>	<b>10600</b>	109	10600	110	10500	56	<b>110</b>	<b>10600</b>	109	10600	110	10500
464.h264ref	56	863	1440	<b>857</b>	<b>1450</b>	855	1450	56	<b>831</b>	<b>1490</b>	841	1470	830	1490
471.omnetpp	56	551	635	<b>552</b>	<b>634</b>	556	629	56	540	648	534	656	<b>538</b>	<b>650</b>
473.astar	56	611	643	<b>609</b>	<b>645</b>	609	645	56	611	643	<b>609</b>	<b>645</b>	609	645
483.xalancbmk	56	321	1200	320	1210	<b>321</b>	<b>1200</b>	56	321	1200	320	1210	<b>321</b>	<b>1200</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:

Set Power Efficiency Mode to Custom

Set Snoop Mode to COD

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /spec/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191

running on huawei Wed Sep 10 03:33:20 2014

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2697 v3 @ 2.60GHz

2 "physical id"s (chips)

56 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 1230**

Huawei RH2288 V3 (Intel Xeon E5-2697 v3)

**SPECint\_rate\_base2006 = 1190**

CPU2006 license: 3175

**Test date:** Sep-2014

Test sponsor: Huawei

**Hardware Availability:** Sep-2014

Tested by: Huawei

**Software Availability:** Nov-2013

## Platform Notes (Continued)

following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 14
siblings   : 28
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
cache size : 17920 KB
```

```
From /proc/meminfo
MemTotal:      264271704 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux huawei 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Sep 9 16:25
```

```
SPEC is set to: /spec
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal      ext4  438G  82G  334G  20% /
```

Additional information from dmidecode:

```
BIOS Insyde Corp. 1.16 09/02/2014
Memory:
8x NO DIMM NO DIMM      3 rank
8x Samsung M393A2G40DB0-CPB 16 GB 2133 MHz 1 rank
8x Samsung M393A2G40DB0-CPB 16 GB 2133 MHz 2 rank
```

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1> /proc/sys/vm/drop_caches
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 1230**

Huawei RH2288 V3 (Intel Xeon E5-2697 v3)

**SPECint\_rate\_base2006 = 1190**

CPU2006 license: 3175

Test date: Sep-2014

Test sponsor: Huawei

Hardware Availability: Sep-2014

Tested by: Huawei

Software Availability: Nov-2013

## General Notes (Continued)

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

    icc -m32

C++ benchmarks:

    icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

    -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
    -opt-mem-layout-trans=3

C++ benchmarks:

    -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch  
    -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

    icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288 V3 (Intel Xeon E5-2697 v3)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

**SPECint\_rate2006 = 1230**

**SPECint\_rate\_base2006 = 1190**

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

## Peak Compiler Invocation (Continued)

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH2288 V3 (Intel Xeon E5-2697 v3)

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

SPECint\_rate2006 = 1230

SPECint\_rate\_base2006 = 1190

Test date: Sep-2014

Hardware Availability: Sep-2014

Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/sh -lsmartheap
```

```
473.astar: basepeak = yes
```

```
483.xalancbmk: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=__alloca
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Oct 22 12:19:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 October 2014.