



# SPEC® CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL660c Gen9  
(2.10 GHz, Intel Xeon E5-4669 v3)

**SPECfp®2006 = 102**

**SPECfp\_base2006 = 96.4**

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Apr-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

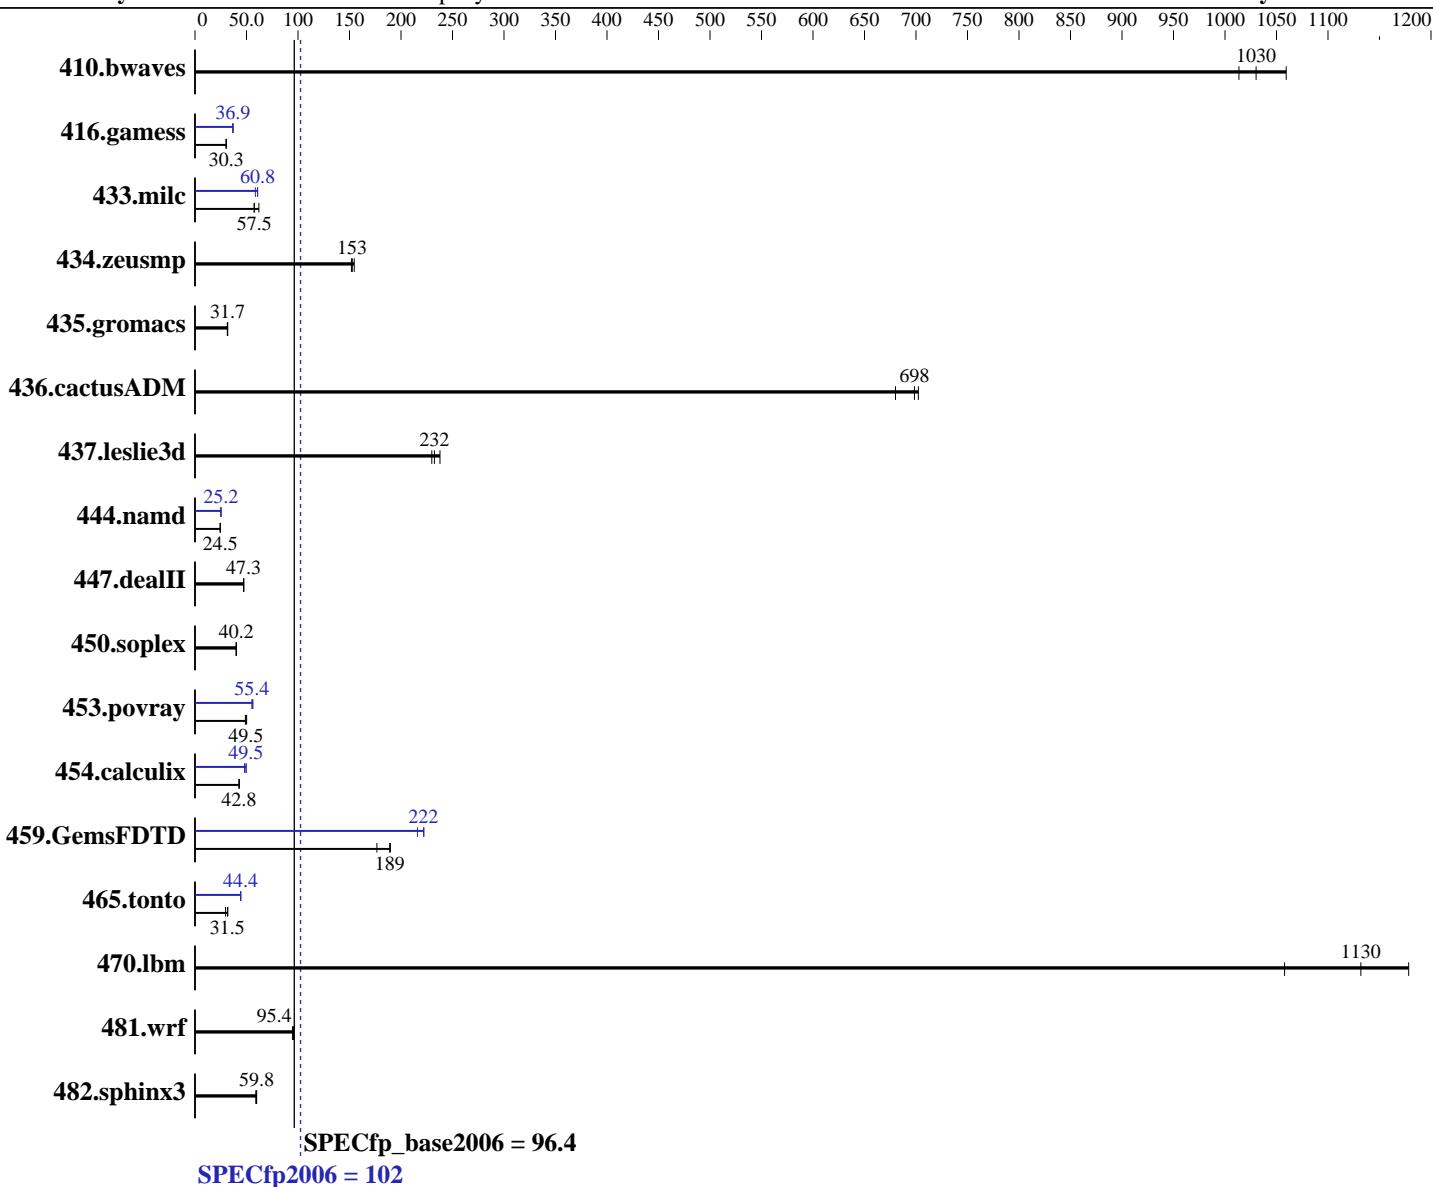

### Hardware

CPU Name: Intel Xeon E5-4669 v3  
CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
CPU MHz: 2100  
FPU: Integrated  
CPU(s) enabled: 72 cores, 4 chips, 18 cores/chip  
CPU(s) orderable: 2,4 chip  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 12 (x86\_64)  
Kernel 3.12.28-4-default  
Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;  
Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux  
Auto Parallel: Yes  
File System: xfs  
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL660c Gen9  
(2.10 GHz, Intel Xeon E5-4669 v3)

**SPECfp2006 = 102**

**SPECfp\_base2006 = 96.4**

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Apr-2015

Hardware Availability: Jun-2015

Software Availability: Oct-2014

L3 Cache: 45 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R)  
Disk Subsystem: 1 x 400 GB SAS SSD, RAID 0  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	13.4	1010	12.8	1060	<u>13.2</u>	<u>1030</u>	13.4	1010	12.8	1060	<u>13.2</u>	<u>1030</u>
416.gamess	<b>646</b>	<b>30.3</b>	644	30.4	648	30.2	<b>534</b>	<b>36.7</b>	<b>530</b>	<b>37.0</b>	<b>531</b>	<b>36.9</b>
433.milc	160	57.5	<u>160</u>	<u>57.5</u>	148	62.0	<u>151</u>	<u>60.8</u>	157	58.6	151	60.8
434.zeusmp	58.9	155	59.9	152	<u>59.6</u>	<u>153</u>	58.9	155	59.9	152	<u>59.6</u>	<u>153</u>
435.gromacs	225	31.7	228	31.4	<u>225</u>	<u>31.7</u>	225	31.7	228	31.4	<u>225</u>	<u>31.7</u>
436.cactusADM	<u>17.1</u>	<b>698</b>	17.0	702	17.6	680	<u>17.1</u>	<b>698</b>	17.0	702	17.6	680
437.leslie3d	39.5	238	<b>40.4</b>	<u>232</u>	40.9	230	39.5	238	<u>40.4</u>	<u>232</u>	40.9	230
444.namd	327	24.5	327	24.6	<u>327</u>	<u>24.5</u>	<u>318</u>	<b>25.2</b>	318	25.2	319	25.2
447.dealII	<b>242</b>	<b>47.3</b>	242	47.3	243	47.1	<u>242</u>	<b>47.3</b>	242	47.3	243	47.1
450.soplex	208	40.2	<u>208</u>	<b>40.2</b>	209	39.9	<u>208</u>	<u>40.2</u>	<u>208</u>	<b>40.2</b>	209	39.9
453.povray	106	50.1	<u>107</u>	<b>49.5</b>	109	48.9	96.0	55.4	<u>96.0</u>	<b>55.4</b>	94.5	56.3
454.calculix	192	43.0	193	42.8	<u>193</u>	<u>42.8</u>	172	48.1	<u>167</u>	<b>49.5</b>	166	49.7
459.GemsFDTD	55.9	190	60.1	177	<u>56.1</u>	<u>189</u>	<u>47.8</u>	<u>222</u>	49.1	216	47.7	222
465.tonto	309	31.9	<u>313</u>	<u>31.5</u>	332	29.6	<u>223</u>	44.2	<u>222</u>	<b>44.4</b>	221	44.5
470.lbm	11.7	1180	13.0	1060	<u>12.1</u>	<u>1130</u>	11.7	1180	13.0	1060	<u>12.1</u>	<u>1130</u>
481.wrf	117	95.6	118	94.6	<u>117</u>	<b>95.4</b>	117	95.6	118	94.6	<u>117</u>	<b>95.4</b>
482.sphinx3	326	59.8	330	59.0	<u>326</u>	<b>59.8</b>	<u>326</u>	<u>59.8</u>	<u>330</u>	<u>59.0</u>	<u>326</u>	<b>59.8</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

## Platform Notes

BIOS Configuration:

Intel Hyperthreading Options set to Disabled

HP Power Profile set to Custom

HP Power Regulator to HP Static High Performance Mode

Minimum Processor Idle Power Core State set to C6 State

Minimum Processor Idle Power Package State set to Package C6 (retention) State

Energy/Performance Bias set to Maximum Performance

Collaborative Power Control set to Disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL660c Gen9  
(2.10 GHz, Intel Xeon E5-4669 v3)

**SPECfp2006 =**

**102**

**SPECfp\_base2006 =**

**96.4**

**CPU2006 license:** 3

**Test date:** Apr-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Oct-2014

## Platform Notes (Continued)

```
Thermal Configuration set to Maximum Cooling
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x Refresh
Sysinfo program /home/cpu2006/config/sysinfo.rev6914
$Rev: 6914 $ $Date::: 2014-06-25 #$ e3fbb8667b5a285932ceab81e28219e1
running on bl660cgen9sles12cpu Tue Apr 14 14:02:58 2015
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4669 v3 @ 2.10GHz
        4 "physical id"s (chips)
        72 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 18
        siblings : 18
        physical 0: cores 0 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
        physical 1: cores 0 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
        physical 2: cores 0 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
        physical 3: cores 0 2 3 4 8 9 10 11 16 17 18 19 20 24 25 26 27
cache size : 46080 KB
```

```
From /proc/meminfo
MemTotal:      529306744 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
        SUSE Linux Enterprise Server 12 (x86_64)
VERSION = 12
PATCHLEVEL = 0
# This file is deprecated and will be removed in a future service pack or
release.
# Please check /etc/os-release for details about this release.
os-release:
        NAME="SLES"
VERSION="12"
VERSION_ID="12"
PRETTY_NAME="SUSE Linux Enterprise Server 12"
ID="sles"
ANSI_COLOR="0;32"
CPE_NAME="cpe:/o:suse:sles:12"

uname -a:
Linux bl660cgen9sles12cpu 3.12.28-4-default #1 SMP Thu Sep 25 17:02:34 UTC
2014 (9879bd4) x86_64 x86_64 x86_64 GNU/Linux
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL660c Gen9  
(2.10 GHz, Intel Xeon E5-4669 v3)

**SPECfp2006 =** 102

**SPECfp\_base2006 =** 96.4

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Apr-2015

**Hardware Availability:** Jun-2015

**Software Availability:** Oct-2014

## Platform Notes (Continued)

run-level 3 Apr 13 20:47

```
SPEC is set to: /home/cpu2006
Filesystem      Type  Size  Used  Avail Use% Mounted on
/dev/sda4        xfs   331G  4.0G  327G   2% /home
Additional information from dmidecode:
```

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS HP I38 03/05/2015

Memory:

32x UNKNOWN NOT AVAILABLE 16 GB 2 rank 2133 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP\_NUM\_THREADS = "72"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB memory using RedHat EL 7.0

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL660c Gen9  
(2.10 GHz, Intel Xeon E5-4669 v3)

**SPECfp2006 = 102**

**SPECfp\_base2006 = 96.4**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Apr-2015

**Hardware Availability:** Jun-2015

**Software Availability:** Oct-2014

## Base Portability Flags (Continued)

```

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL660c Gen9  
(2.10 GHz, Intel Xeon E5-4669 v3)

**SPECfp2006 =**

**102**

**SPECfp\_base2006 =**

**96.4**

**CPU2006 license:** 3

**Test date:** Apr-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Oct-2014

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -auto-ilp32 -ansi-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

```
444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -fno-alias -auto-ilp32
```

```
447.dealII: basepeak = yes
```

```
450.soplex: basepeak = yes
```

```
453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll14
             -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes
```

```
416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
              -inline-level=0 -scalar-rep-
```

```
434.zeusmp: basepeak = yes
```

```
437.leslie3d: basepeak = yes
```

```
459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
                -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll12
                -inline-level=0 -opt-prefetch -parallel
```

```
465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -inline-calloc -opt-malloc-options=3 -auto -unroll14
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant BL660c Gen9  
(2.10 GHz, Intel Xeon E5-4669 v3)

**SPECfp2006 =** 102

**SPECfp\_base2006 =** 96.4

**CPU2006 license:** 3

**Test date:** Apr-2015

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Jun-2015

**Tested by:** Hewlett-Packard Company

**Software Availability:** Oct-2014

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-HSW-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Tue Jun 2 13:49:22 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 June 2015.