



SPEC[®] CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp[®]2006 = **110**

Lenovo System x3500 M5
(Intel Xeon E5-2685 v3, 2.60 GHz)

SPECfp_base2006 = **106**

CPU2006 license: 9017


Test date: Jul-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2015

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

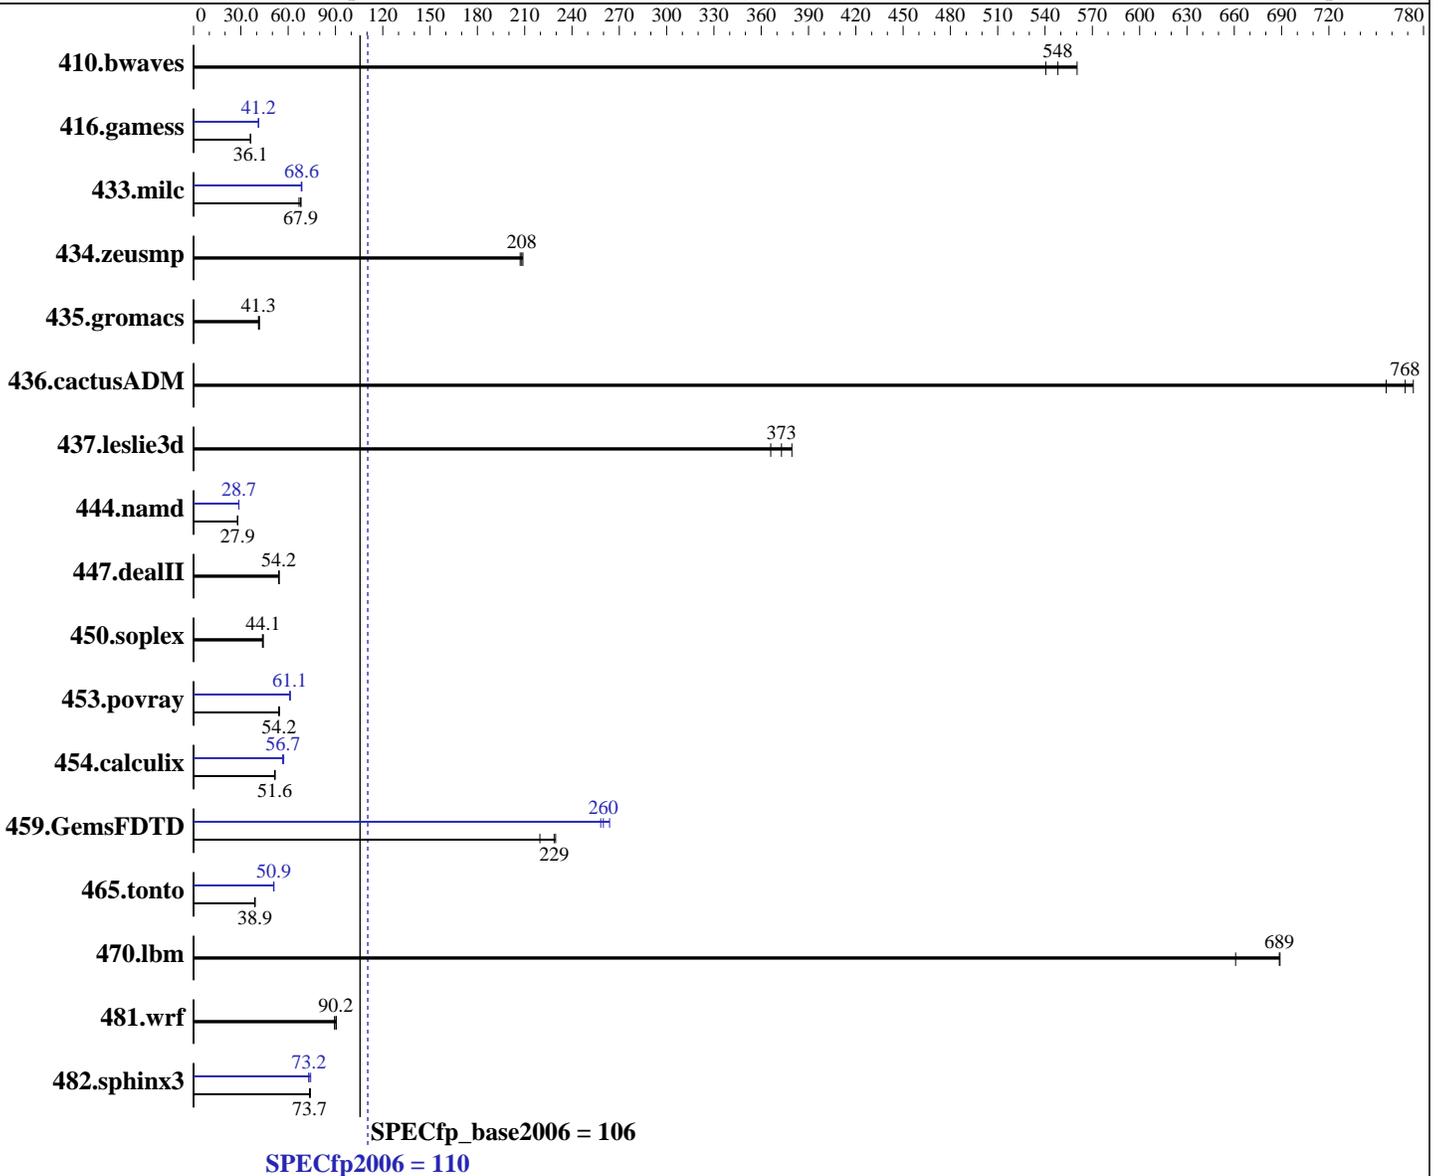

Hardware

CPU Name: Intel Xeon E5-2685 v3
 CPU Characteristics: Intel Turbo Boost Technology up to 3.30 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.0 (Maipo)
 3.10.0-123.el7.x86_64
 Compiler: C/C++: Version 15.0.0.090 of Intel C++ Studio XE for Linux;
 Fortran: Version 15.0.0.090 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: xfs

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = **110**

Lenovo System x3500 M5
(Intel Xeon E5-2685 v3, 2.60 GHz)

SPECfp_base2006 = **106**

CPU2006 license: 9017

Test date: Jul-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2015

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2133P-R)
Disk Subsystem: 1 x 960 GB SATA SSD
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	25.1	540	24.3	560	<u>24.8</u>	<u>548</u>	25.1	540	24.3	560	<u>24.8</u>	<u>548</u>
416.gamess	540	36.2	<u>542</u>	<u>36.1</u>	544	36.0	<u>475</u>	<u>41.2</u>	476	41.1	475	41.2
433.milc	<u>135</u>	<u>67.9</u>	135	68.1	137	66.9	134	68.6	<u>134</u>	<u>68.6</u>	134	68.3
434.zeusmp	<u>43.7</u>	<u>208</u>	43.6	209	43.9	207	<u>43.7</u>	<u>208</u>	43.6	209	43.9	207
435.gromacs	171	41.8	173	41.2	<u>173</u>	<u>41.3</u>	171	41.8	173	41.2	<u>173</u>	<u>41.3</u>
436.cactusADM	<u>15.6</u>	<u>768</u>	15.8	756	15.4	774	<u>15.6</u>	<u>768</u>	15.8	756	15.4	774
437.leslie3d	<u>25.2</u>	<u>373</u>	25.7	366	24.8	379	<u>25.2</u>	<u>373</u>	25.7	366	24.8	379
444.namd	287	27.9	287	27.9	<u>287</u>	<u>27.9</u>	279	28.7	279	28.7	<u>279</u>	<u>28.7</u>
447.dealII	211	54.1	211	54.2	<u>211</u>	<u>54.2</u>	211	54.1	211	54.2	<u>211</u>	<u>54.2</u>
450.soplex	<u>189</u>	<u>44.1</u>	191	43.7	189	44.1	<u>189</u>	<u>44.1</u>	191	43.7	189	44.1
453.povray	97.8	54.4	98.4	54.1	<u>98.2</u>	<u>54.2</u>	86.7	61.4	87.1	61.0	<u>87.1</u>	<u>61.1</u>
454.calculix	160	51.7	<u>160</u>	<u>51.6</u>	161	51.4	<u>145</u>	<u>56.7</u>	144	57.2	146	56.5
459.GemsFDTD	48.3	220	<u>46.4</u>	<u>229</u>	46.2	230	41.1	258	40.2	264	<u>40.8</u>	<u>260</u>
465.tonto	252	39.1	254	38.7	<u>253</u>	<u>38.9</u>	193	51.0	<u>193</u>	<u>50.9</u>	194	50.8
470.lbm	<u>20.0</u>	<u>689</u>	20.8	661	19.9	689	<u>20.0</u>	<u>689</u>	20.8	661	19.9	689
481.wrf	123	90.5	<u>124</u>	<u>90.2</u>	125	89.3	123	90.5	<u>124</u>	<u>90.2</u>	125	89.3
482.sphinx3	263	74.1	<u>264</u>	<u>73.7</u>	265	73.5	267	73.0	262	74.3	<u>266</u>	<u>73.2</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS setting:
Operating Mode set to "Efficiency-Favor Performance"
Sysinfo program /home/SPEC/config/sysinfo.rev6914
\$Rev: 6914 \$ \$Date:: 2014-06-25 #\$ e3fbb8667b5a285932ceab81e28219e1
running on x3500M5 Tue Jul 28 05:15:20 2015

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 110

Lenovo System x3500 M5
(Intel Xeon E5-2685 v3, 2.60 GHz)

SPECfp_base2006 = 106

CPU2006 license: 9017

Test date: Jul-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2015

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

Platform Notes (Continued)

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2685 v3 @ 2.60GHz

2 "physical id"s (chips)

24 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 12

siblings : 12

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13

cache size : 30720 KB

From /proc/meminfo

MemTotal: 263456756 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.0 (Maipo)"

ID="rhel"

ID_LIKE="fedora"

VERSION_ID="7.0"

PRETTY_NAME="Red Hat Enterprise Linux Server 7.0 (Maipo)"

ANSI_COLOR="0;31"

CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"

redhat-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.0 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise_linux:7.0:ga:server

uname -a:

Linux x3500M5 3.10.0-123.el7.x86_64 #1 SMP Mon May 5 11:16:57 EDT 2014 x86_64
x86_64 x86_64 GNU/Linux

SPEC is set to: /home/SPEC

Filesystem Type Size Used Avail Use% Mounted on

/dev/mapper/rhel-root xfs 927G 140G 787G 16% /

Additional information from dmidecode:

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS IBM -[TAE105J-1.10]- 04/20/2015

Memory:

16x Hynix HMA42GR7MFR4N-TFT1 16 GB 2 rank 2133 MHz

8x NO DIMM Unknown

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 110

Lenovo System x3500 M5
(Intel Xeon E5-2685 v3, 2.60 GHz)

SPECfp_base2006 = 106

CPU2006 license: 9017

Test date: Jul-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2015

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

Platform Notes (Continued)

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/SPEC/libs/32:/home/SPEC/libs/64:/home/SPEC/sh"

OMP_NUM_THREADS = "24"

Binaries compiled on a system with 1x Core i5-4670K CPU + 16GB
memory using RedHat EL 7.0

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 110

Lenovo System x3500 M5
(Intel Xeon E5-2685 v3, 2.60 GHz)

SPECfp_base2006 = 106

CPU2006 license: 9017

Test date: Jul-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2015

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

Base Portability Flags (Continued)

482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
-ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32 -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 110

Lenovo System x3500 M5
(Intel Xeon E5-2685 v3, 2.60 GHz)

SPECfp_base2006 = 106

CPU2006 license: 9017

Test date: Jul-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2015

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2015 Standard Performance Evaluation Corporation

Lenovo Group Limited

SPECfp2006 = 110

Lenovo System x3500 M5
(Intel Xeon E5-2685 v3, 2.60 GHz)

SPECfp_base2006 = 106

CPU2006 license: 9017

Test date: Jul-2015

Test sponsor: Lenovo Group Limited

Hardware Availability: Jan-2015

Tested by: Lenovo Group Limited

Software Availability: Sep-2014

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-B.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic15.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Lenovo-Platform-Flags-V1.2-HSW-B.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.

For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Aug 12 11:07:56 2015 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 August 2015.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 7