



# SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/R120g-1E (Intel Xeon E5-2623 v4)

**SPECfp®2006 = 96.2**

**SPECfp\_base2006 = 92.1**

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2016

Hardware Availability: Jun-2016

Software Availability: Jan-2016

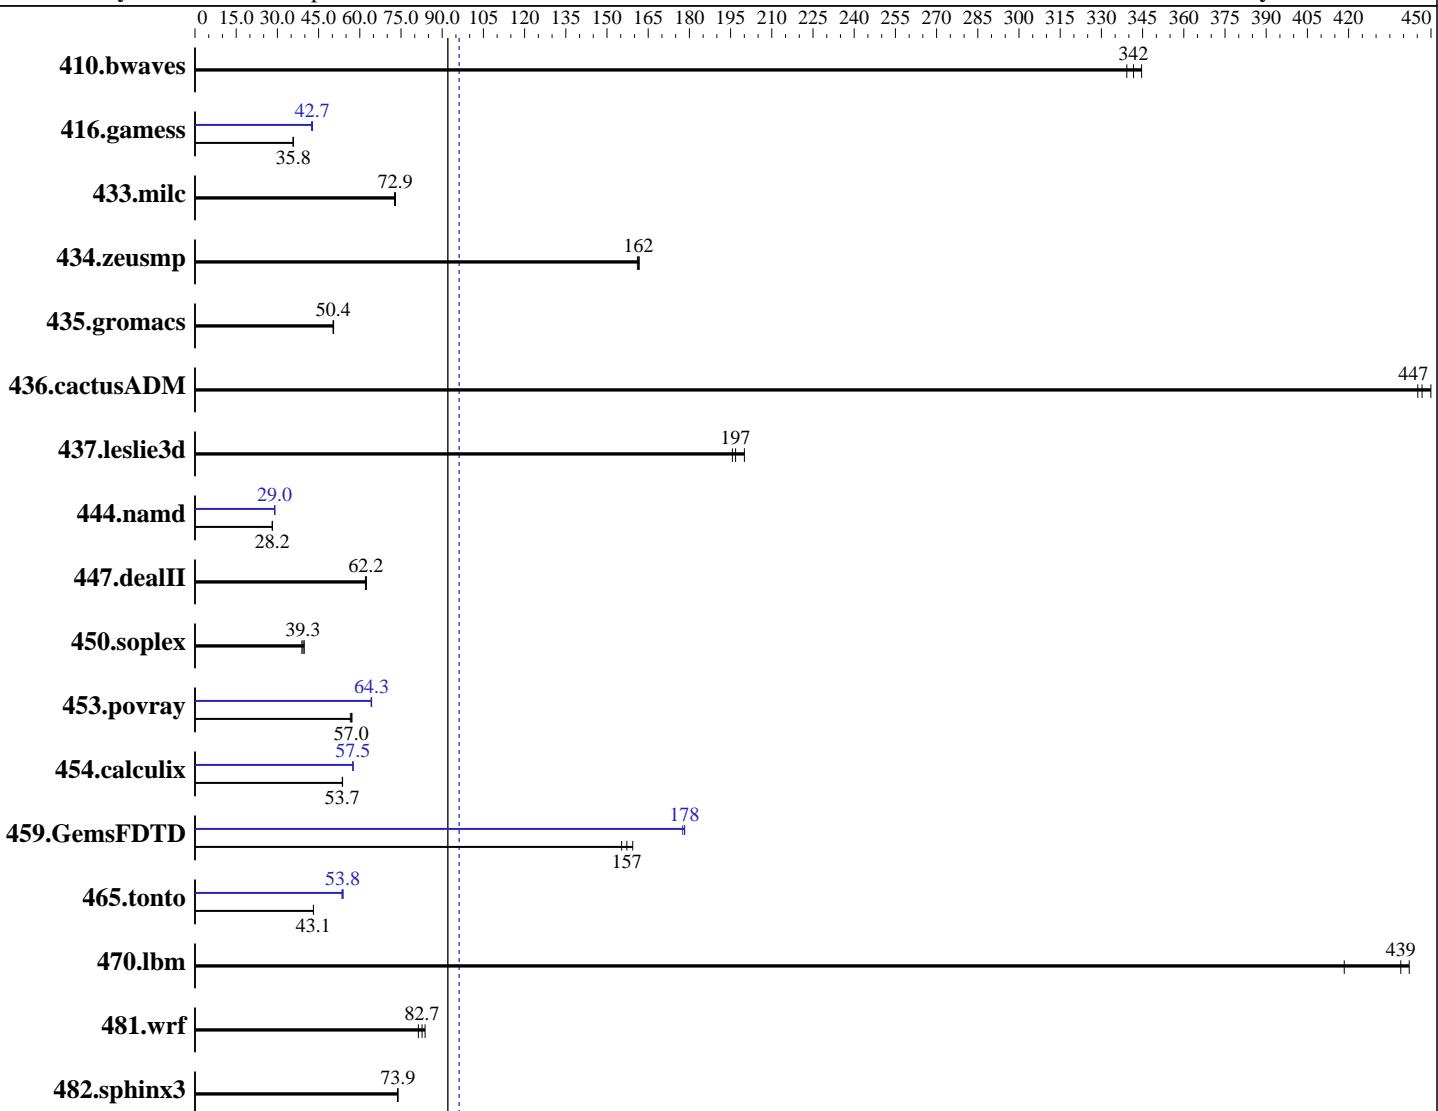

**SPECfp\_base2006 = 92.1**

**SPECfp®2006 = 96.2**

## Hardware

CPU Name: Intel Xeon E5-2623 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

## Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 Compiler: Kernel 3.10.0-327.4.5.el7.x86\_64  
 Auto Parallel: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux;  
 File System: Fortran: Version 16.0.0.101 of Intel Fortran Studio XE for Linux  
 ext4

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120g-1E (Intel Xeon E5-2623 v4)

**SPECfp2006 = 96.2**

**SPECfp\_base2006 = 92.1**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** May-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Jan-2016

L3 Cache:	10 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)
Disk Subsystem:	1 x 1 TB SATA, 7200 RPM
Other Hardware:	None

System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit
Other Software:	None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	39.4	345	<b>39.8</b>	<b>342</b>	40.1	339	39.4	345	<b>39.8</b>	<b>342</b>	40.1	339
416.gamess	548	35.7	547	35.8	<b>547</b>	<b>35.8</b>	461	42.4	458	42.8	<b>458</b>	<b>42.7</b>
433.milc	<b>126</b>	<b>72.9</b>	126	73.0	126	72.6	<b>126</b>	<b>72.9</b>	126	73.0	126	72.6
434.zeusmp	<b>56.3</b>	<b>162</b>	56.5	161	56.3	162	<b>56.3</b>	<b>162</b>	56.5	161	<b>56.3</b>	162
435.gromacs	142	50.3	<b>142</b>	<b>50.4</b>	141	50.5	<b>142</b>	<b>50.3</b>	<b>142</b>	<b>50.4</b>	141	50.5
436.cactusADM	26.6	450	<b>26.7</b>	<b>447</b>	26.8	445	<b>26.6</b>	<b>450</b>	<b>26.7</b>	<b>447</b>	26.8	445
437.leslie3d	<b>47.8</b>	<b>197</b>	48.0	196	47.0	200	<b>47.8</b>	<b>197</b>	48.0	196	47.0	200
444.namd	285	28.2	<b>285</b>	<b>28.2</b>	285	28.1	<b>277</b>	29.0	276	29.0	<b>276</b>	<b>29.0</b>
447.dealII	<b>184</b>	<b>62.2</b>	184	62.0	183	62.4	<b>184</b>	<b>62.2</b>	184	62.0	183	62.4
450.soplex	214	38.9	210	39.8	<b>212</b>	<b>39.3</b>	214	38.9	210	39.8	<b>212</b>	<b>39.3</b>
453.povray	93.1	57.2	<b>93.4</b>	<b>57.0</b>	94.1	56.5	<b>82.8</b>	<b>64.3</b>	82.7	64.3	83.0	64.1
454.calculix	154	53.6	<b>154</b>	<b>53.7</b>	154	53.7	<b>143</b>	57.6	<b>143</b>	<b>57.5</b>	144	57.5
459.GemsFDTD	68.3	155	66.6	159	<b>67.5</b>	<b>157</b>	<b>59.5</b>	<b>178</b>	59.5	178	59.8	178
465.tonto	228	43.1	<b>228</b>	<b>43.1</b>	228	43.1	<b>182</b>	<b>53.9</b>	<b>183</b>	<b>53.8</b>	184	53.5
470.lbm	<b>31.3</b>	<b>439</b>	31.1	442	32.8	418	<b>31.3</b>	<b>439</b>	31.1	442	32.8	418
481.wrf	133	83.8	137	81.3	<b>135</b>	<b>82.7</b>	133	83.8	137	81.3	<b>135</b>	<b>82.7</b>
482.sphinx3	264	73.9	<b>264</b>	<b>73.9</b>	264	73.7	<b>264</b>	<b>73.9</b>	<b>264</b>	<b>73.9</b>	264	73.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Power Management Policy: Custom

Energy Performance: Performance

Patrol Scrub: Disabled

Snoop Mode: Home Snoop with Directory

Hyper-Threading: Disabled



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120g-1E (Intel Xeon E5-2623 v4)

**SPECfp2006 = 96.2**

**SPECfp\_base2006 = 92.1**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** May-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Jan-2016

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP\_NUM\_THREADS = "8"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120g-1E (Intel Xeon E5-2623 v4)

**SPECfp2006 = 96.2**

**CPU2006 license:** 9006

**Test date:** May-2016

**Test sponsor:** NEC Corporation

**Hardware Availability:** Jun-2016

**Tested by:** NEC Corporation

**Software Availability:** Jan-2016

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -opt-prefetch  
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120g-1E (Intel Xeon E5-2623 v4)

**SPECfp2006 = 96.2**

**SPECfp\_base2006 = 92.1**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** May-2016

**Hardware Availability:** Jun-2016

**Software Availability:** Jan-2016

## Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)  
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)  
-par-num-threads=1(pass 1) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120g-1E (Intel Xeon E5-2623 v4)

**SPECfp2006 = 96.2**

**SPECfp\_base2006 = 92.1**

**CPU2006 license:** 9006

**Test date:** May-2016

**Test sponsor:** NEC Corporation

**Hardware Availability:** Jun-2016

**Tested by:** NEC Corporation

**Software Availability:** Jan-2016

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jun 30 14:05:48 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 14 June 2016.