



SPEC® CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint®_rate2006 = 846

Express5800/R120g-1E (Intel Xeon E5-2630 v4)

SPECint_rate_base2006 = 808

CPU2006 license: 9006


Test date: May-2016

Test sponsor: NEC Corporation

Hardware Availability: Jun-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

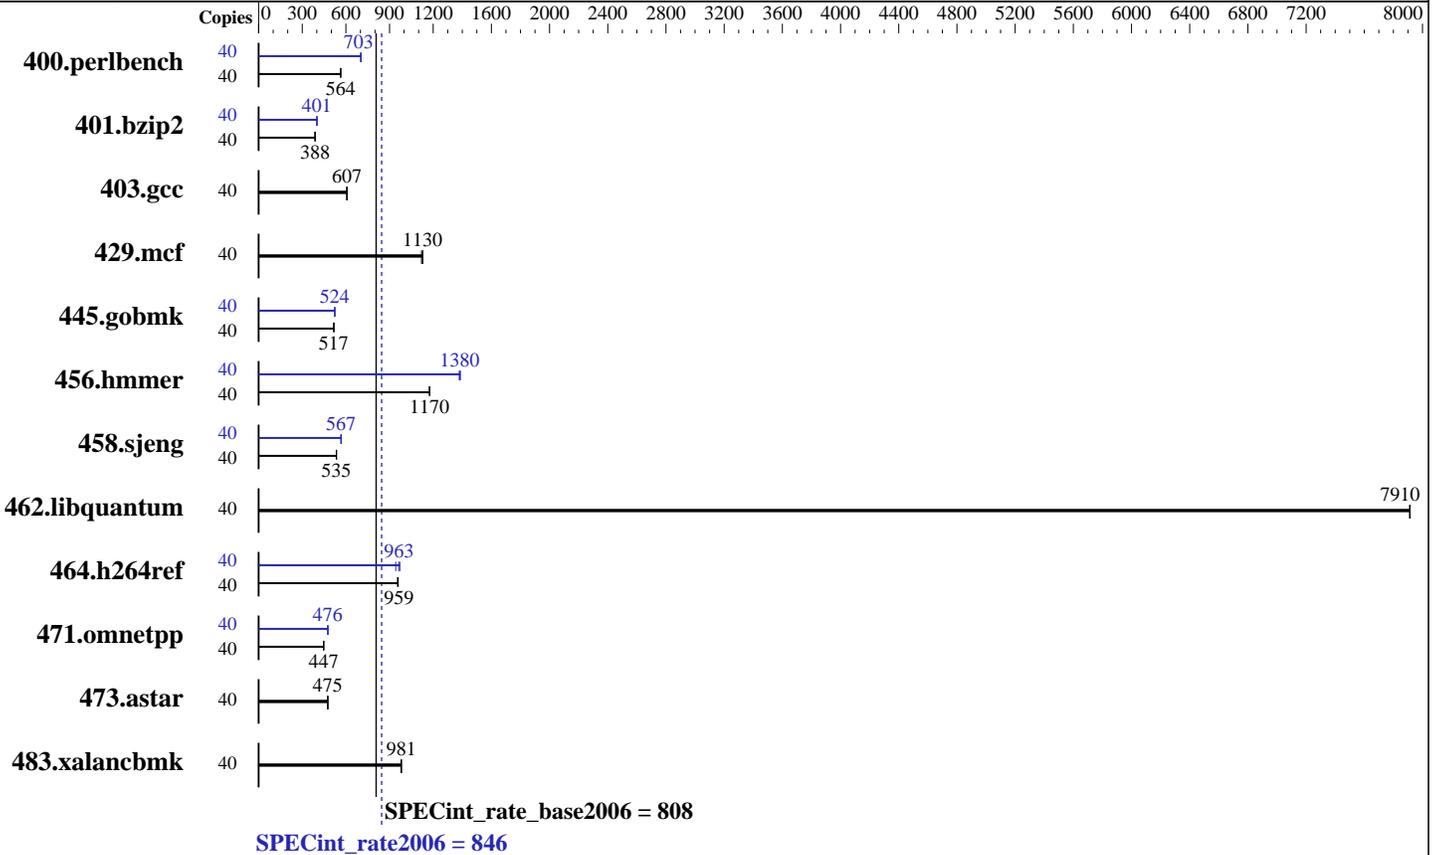

Hardware

CPU Name: Intel Xeon E5-2630 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 25 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)
 Disk Subsystem: 1 x 1 TB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 Kernel 3.10.0-327.4.5.el7.x86_64
 Compiler: C/C++: Version 16.0.0.101 of Intel C++ Studio XE for Linux
 Auto Parallel: No
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V10.2



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 846

Express5800/R120g-1E (Intel Xeon E5-2630 v4)

SPECint_rate_base2006 = 808

CPU2006 license: 9006

Test date: May-2016

Test sponsor: NEC Corporation

Hardware Availability: Jun-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
400.perlbench	40	691	565	694	563	693	564	40	557	702	556	703	556	704		
401.bzip2	40	996	388	994	388	994	388	40	962	401	963	401	963	401		
403.gcc	40	530	608	530	607	531	606	40	530	608	530	607	531	606		
429.mcf	40	324	1130	326	1120	324	1130	40	324	1130	326	1120	324	1130		
445.gobmk	40	811	517	812	517	812	517	40	801	524	802	523	801	524		
456.hammer	40	318	1170	317	1180	318	1170	40	271	1380	270	1380	269	1390		
458.sjeng	40	904	535	906	534	903	536	40	854	567	854	567	853	567		
462.libquantum	40	105	7910	105	7910	105	7910	40	105	7910	105	7910	105	7910		
464.h264ref	40	923	959	927	955	923	959	40	939	943	919	963	912	971		
471.omnetpp	40	559	447	558	448	559	447	40	526	476	525	476	525	476		
473.astar	40	590	476	591	475	591	475	40	590	476	591	475	591	475		
483.xalancbmk	40	282	979	281	982	281	981	40	282	979	281	982	281	981		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
Power Management Policy: Custom
Energy Performance: Performance
Patrol Scrub: Disabled
Snoop Mode: Home Snoop with Directory

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Binaries compiled on a system with 1x Intel Core i5-4670K CPU + 32GB memory using RedHat EL 7.1

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 846

Express5800/R120g-1E (Intel Xeon E5-2630 v4)

SPECint_rate_base2006 = 808

CPU2006 license: 9006

Test date: May-2016

Test sponsor: NEC Corporation

Hardware Availability: Jun-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

General Notes (Continued)

```
echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:

```
icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

C++ benchmarks:

```
icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin
```

Base Portability Flags

```
400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX_IA32
401.bzip2: -D_FILE_OFFSET_BITS=64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64
458.sjeng: -D_FILE_OFFSET_BITS=64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch
-opt-mem-layout-trans=3 -Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 846

Express5800/R120g-1E (Intel Xeon E5-2630 v4)

SPECint_rate_base2006 = 808

CPU2006 license: 9006

Test date: May-2016

Test sponsor: NEC Corporation

Hardware Availability: Jun-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32 -L/opt/intel/compilers_and_libraries_2016/linux/compiler/lib/ia32_lin

Peak Portability Flags

400.perlbench: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
403.gcc: -D_FILE_OFFSET_BITS=64
429.mcf: -D_FILE_OFFSET_BITS=64
445.gobmk: -D_FILE_OFFSET_BITS=64
456.hmmer: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
458.sjeng: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LP64
462.libquantum: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX
464.h264ref: -D_FILE_OFFSET_BITS=64
471.omnetpp: -D_FILE_OFFSET_BITS=64
473.astar: -D_FILE_OFFSET_BITS=64
483.xalancbmk: -D_FILE_OFFSET_BITS=64 -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -auto-ilp32
401.bzip2: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -opt-prefetch
-auto-ilp32 -ansi-alias
403.gcc: basepeak = yes
429.mcf: basepeak = yes

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 846

Express5800/R120g-1E (Intel Xeon E5-2630 v4)

SPECint_rate_base2006 = 808

CPU2006 license: 9006

Test date: May-2016

Test sponsor: NEC Corporation

Hardware Availability: Jun-2016

Tested by: NEC Corporation

Software Availability: Jan-2016

Peak Optimization Flags (Continued)

445.gobmk: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-prof-use(pass 2) -par-num-threads=1(pass 1) -ansi-alias
-opt-mem-layout-trans=3

456.hmmr: -xCORE-AVX2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll4
-auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -xCORE-AVX2(pass 2) -prof-gen:threadsafe(pass 1)
-ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2)
-par-num-threads=1(pass 1) -prof-use(pass 2) -ansi-alias
-opt-ra-region-strategy=block -Wl,-z,muldefs
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-120g-RevC.xml>



SPEC CINT2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 846

Express5800/R120g-1E (Intel Xeon E5-2630 v4)

SPECint_rate_base2006 = 808

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2016

Hardware Availability: Jun-2016

Software Availability: Jan-2016

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jun 30 14:05:54 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 June 2016.