



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECfp<sup>®</sup>\_rate2006 = 586

SPECfp\_rate\_base2006 = 569

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jul-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

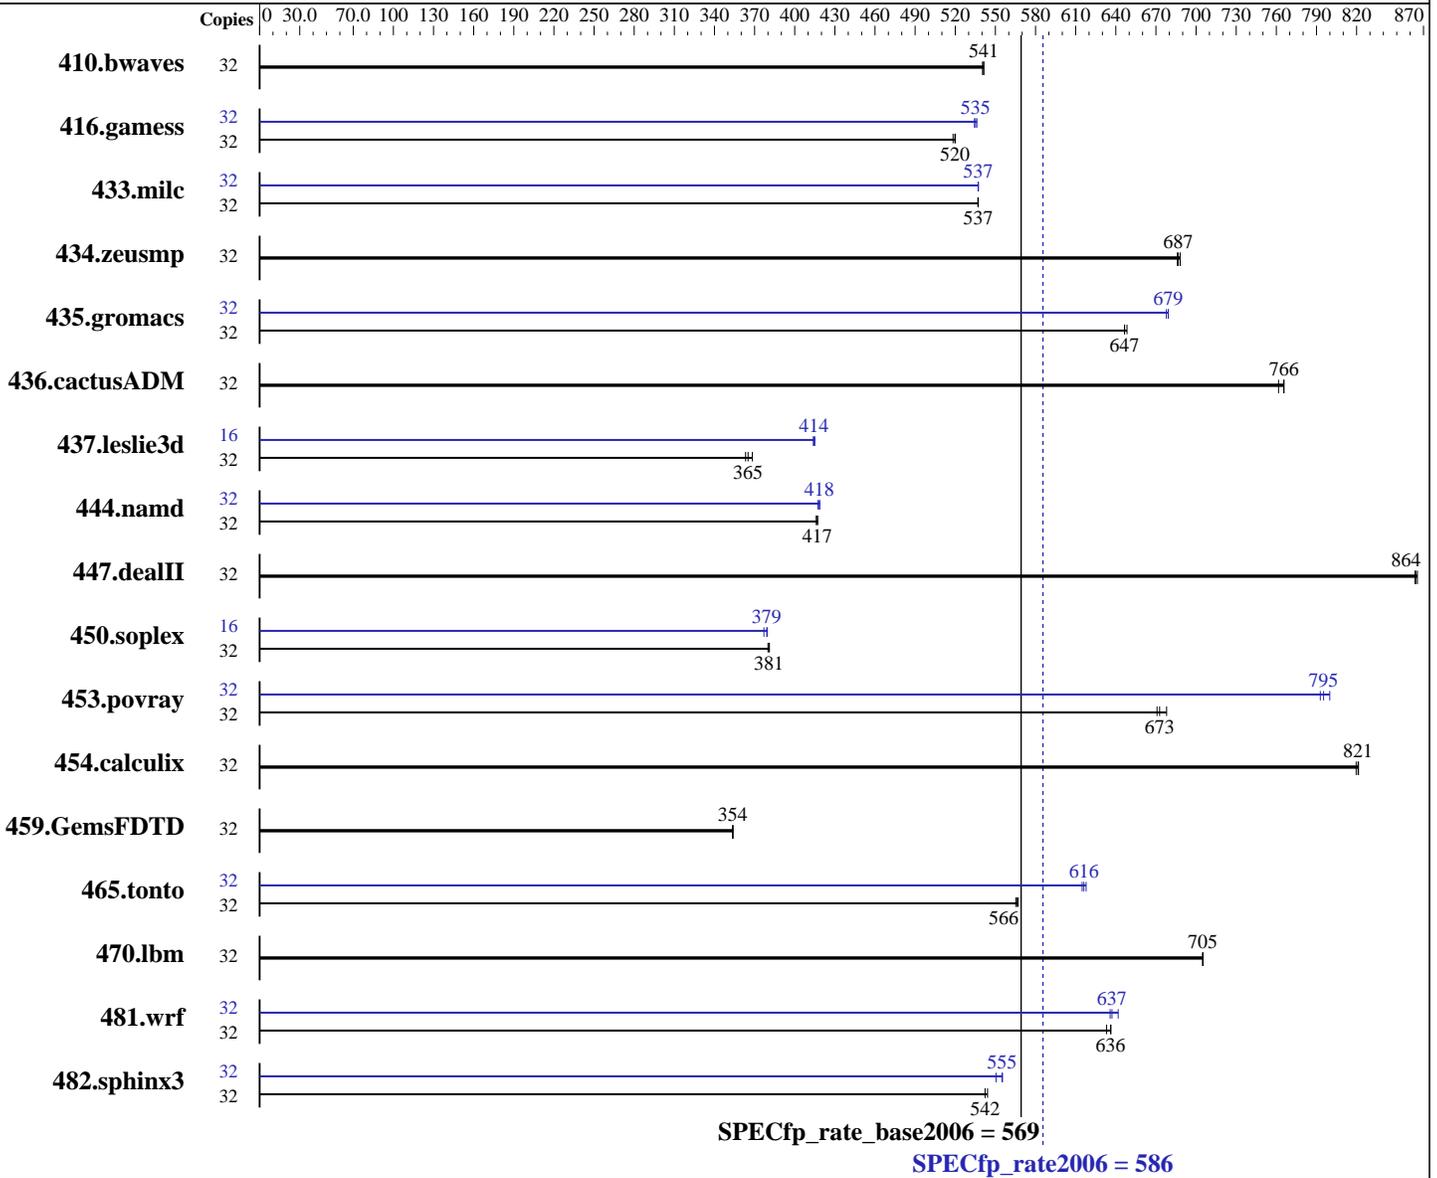

### Hardware

CPU Name: Intel Xeon E5-2620 v4  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2100  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)  
 3.10.0-327.18.2.el7.x86\_64  
 Compiler: C/C++: Version 16.0.3.210 of Intel C++ Studio XE for Linux;  
 Fortran: Version 16.0.3.210 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECfp\_rate2006 = **586**

SPECfp\_rate\_base2006 = **569**

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jul-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (16 x 16 GB 2Rx4 PC4-2400T-R, running at 2133 MHz)  
Disk Subsystem: 1 x 240 GB SATA II SSD  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	803	541	<b>803</b>	<b>541</b>	805	540	32	803	541	<b>803</b>	<b>541</b>	805	540
416.gamess	32	1209	518	<b>1206</b>	<b>520</b>	1205	520	32	1169	536	1173	534	<b>1171</b>	<b>535</b>
433.milc	32	547	537	547	537	<b>547</b>	<b>537</b>	32	547	537	<b>547</b>	<b>537</b>	547	537
434.zeusmp	32	<b>424</b>	<b>687</b>	423	688	424	686	32	<b>424</b>	<b>687</b>	423	688	424	686
435.gromacs	32	<b>353</b>	<b>647</b>	352	648	353	647	32	<b>336</b>	<b>679</b>	337	678	336	679
436.cactusADM	32	502	762	<b>499</b>	<b>766</b>	499	766	32	502	762	<b>499</b>	<b>766</b>	499	766
437.leslie3d	32	817	368	<b>824</b>	<b>365</b>	828	363	16	<b>363</b>	<b>414</b>	362	415	363	414
444.namd	32	617	416	<b>616</b>	<b>417</b>	615	417	32	615	417	613	419	<b>613</b>	<b>418</b>
447.dealII	32	<b>424</b>	<b>864</b>	424	864	423	865	32	<b>424</b>	<b>864</b>	424	864	423	865
450.soplex	32	<b>701</b>	<b>381</b>	702	380	700	381	16	352	380	354	377	<b>352</b>	<b>379</b>
453.povray	32	254	671	251	678	<b>253</b>	<b>673</b>	32	213	800	215	793	<b>214</b>	<b>795</b>
454.calculix	32	322	820	<b>322</b>	<b>821</b>	321	821	32	322	820	<b>322</b>	<b>821</b>	321	821
459.GemsFDTD	32	959	354	<b>960</b>	<b>354</b>	960	354	32	959	354	<b>960</b>	<b>354</b>	960	354
465.tonto	32	557	565	555	567	<b>556</b>	<b>566</b>	32	<b>511</b>	<b>616</b>	510	618	512	615
470.lbm	32	624	705	<b>624</b>	<b>705</b>	623	705	32	624	705	<b>624</b>	<b>705</b>	623	705
481.wrf	32	565	633	<b>562</b>	<b>636</b>	562	636	32	557	642	<b>561</b>	<b>637</b>	562	636
482.sphinx3	32	1150	542	<b>1150</b>	<b>542</b>	1146	544	32	1123	555	1133	550	<b>1124</b>	<b>555</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Bios Settings:  
Intel(R) Hyper-Threading Tech = Enabled  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECfp\_rate2006 = 586

SPECfp\_rate\_base2006 = 569

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jul-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

### Platform Notes (Continued)

Power & Performance = Performance  
Enforce POR = Disabled  
Memory Operating Speed Selection = 2133  
Set FAN Profile = Performance  
Fan PWM Offset = 0

Sysinfo program /cpu2006.1.2/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on SUT Fri Jul 29 02:41:24 2016

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2620 v4 @ 2.10GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      263860684 kB
HugePages_Total:      1
Hugepagesize:      2048 kB
```

```
From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.2 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.2"
PRETTY_NAME="Red Hat Enterprise Linux"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"
os-release.rpmsave:
NAME="Red Hat Enterprise Linux Server"
VERSION="7.0 (Maipo)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="7.0"
PRETTY_NAME="Red Hat Enterprise Linux"
ANSI_COLOR="0;31"
CPE_NAME="cpe:/o:redhat:enterprise_linux:7.0:GA:server"
redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2620 v4, 2.10 GHz)

**SPECfp\_rate2006 = 586**

**SPECfp\_rate\_base2006 = 569**

**CPU2006 license:** 9008

**Test sponsor:** ACTION S.A.

**Tested by:** ACTION S.A.

**Test date:** Jul-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Mar-2016

## Platform Notes (Continued)

```
system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server
```

```
uname -a:
Linux SUT 3.10.0-327.18.2.el7.x86_64 #2 SMP Wed Jun 1 17:37:13 CEST 2016
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Jul 27 08:41
```

SPEC is set to: /cpu2006.1.2

```
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdal        ext4  212G  131G   70G  66% /
```

Additional information from dmidecode:

```
BIOS Intel Corporation SE5C610.86B.01.01.0016.033120161139 03/31/2016
```

Memory:

```
16x 16 GB
16x Hynix HMA42GR7AFR4N-UH 16 GB 2134 MHz 2 rank
8x NO DIMM NO DIMM
```

(End of data from sysinfo program)

dmidecode does not properly detect memory modules

16 modules of 16 GB were used to run the test (256 GB total)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64:/cpu2006.1.2/sh"
```

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

Binaries compiled on a system with 2x Xeon E5-2650 v4 chips + 256 GB memory using RedHat EL 7.2

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2620 v4, 2.10 GHz)

SPECfp\_rate2006 = 586

SPECfp\_rate\_base2006 = 569

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: ACTION S.A.

Test date: Jul-2016

Hardware Availability: Mar-2016

Software Availability: Mar-2016

## Base Compiler Invocation (Continued)

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:

-xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**ACTION S.A.**

ACTINA SOLAR 220 X6 (Intel Xeon E5-2620 v4, 2.10 GHz)

**SPECfp\_rate2006 = 586**

**SPECfp\_rate\_base2006 = 569**

**CPU2006 license:** 9008

**Test sponsor:** ACTION S.A.

**Tested by:** ACTION S.A.

**Test date:** Jul-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Mar-2016

## Peak Compiler Invocation (Continued)

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32 -L/opt/intel/compilers\_and\_libraries\_2016/linux/lib/ia32\_lin

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.deallI: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Peak Optimization Flags

C benchmarks:

433.milc: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2)  
 -opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
 -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
 -unroll2

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## ACTION S.A.

ACTINA SOLAR 220 X6 (Intel Xeon E5-2620 v4, 2.10 GHz)

**SPECfp\_rate2006 = 586**

**SPECfp\_rate\_base2006 = 569**

**CPU2006 license:** 9008

**Test sponsor:** ACTION S.A.

**Tested by:** ACTION S.A.

**Test date:** Jul-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Mar-2016

## Peak Optimization Flags (Continued)

444.namd: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2) -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xCORE-AVX2 -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4  
-auto -inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -xCORE-AVX2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2)  
-opt-mem-layout-trans=3(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**ACTION S.A.**

ACTINA SOLAR 220 X6 (Intel Xeon E5-2620 v4, 2.10 GHz)

**SPECfp\_rate2006 = 586**

**SPECfp\_rate\_base2006 = 569**

**CPU2006 license:** 9008

**Test sponsor:** ACTION S.A.

**Tested by:** ACTION S.A.

**Test date:** Jul-2016

**Hardware Availability:** Mar-2016

**Software Availability:** Mar-2016

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.html>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-aug-2015-For-Intel-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic16.0-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/ACTION.SA-Platform-Flags-RevB-aug-2015-For-Intel-Platform.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Wed Aug 24 13:15:00 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 23 August 2016.