



SPEC[®] CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp[®]2006 = 127

Huawei CH242 V3 (Intel Xeon E7-8894 v4)

SPECfp_base2006 = 121

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2017

Hardware Availability: Mar-2017

Software Availability: Sep-2016

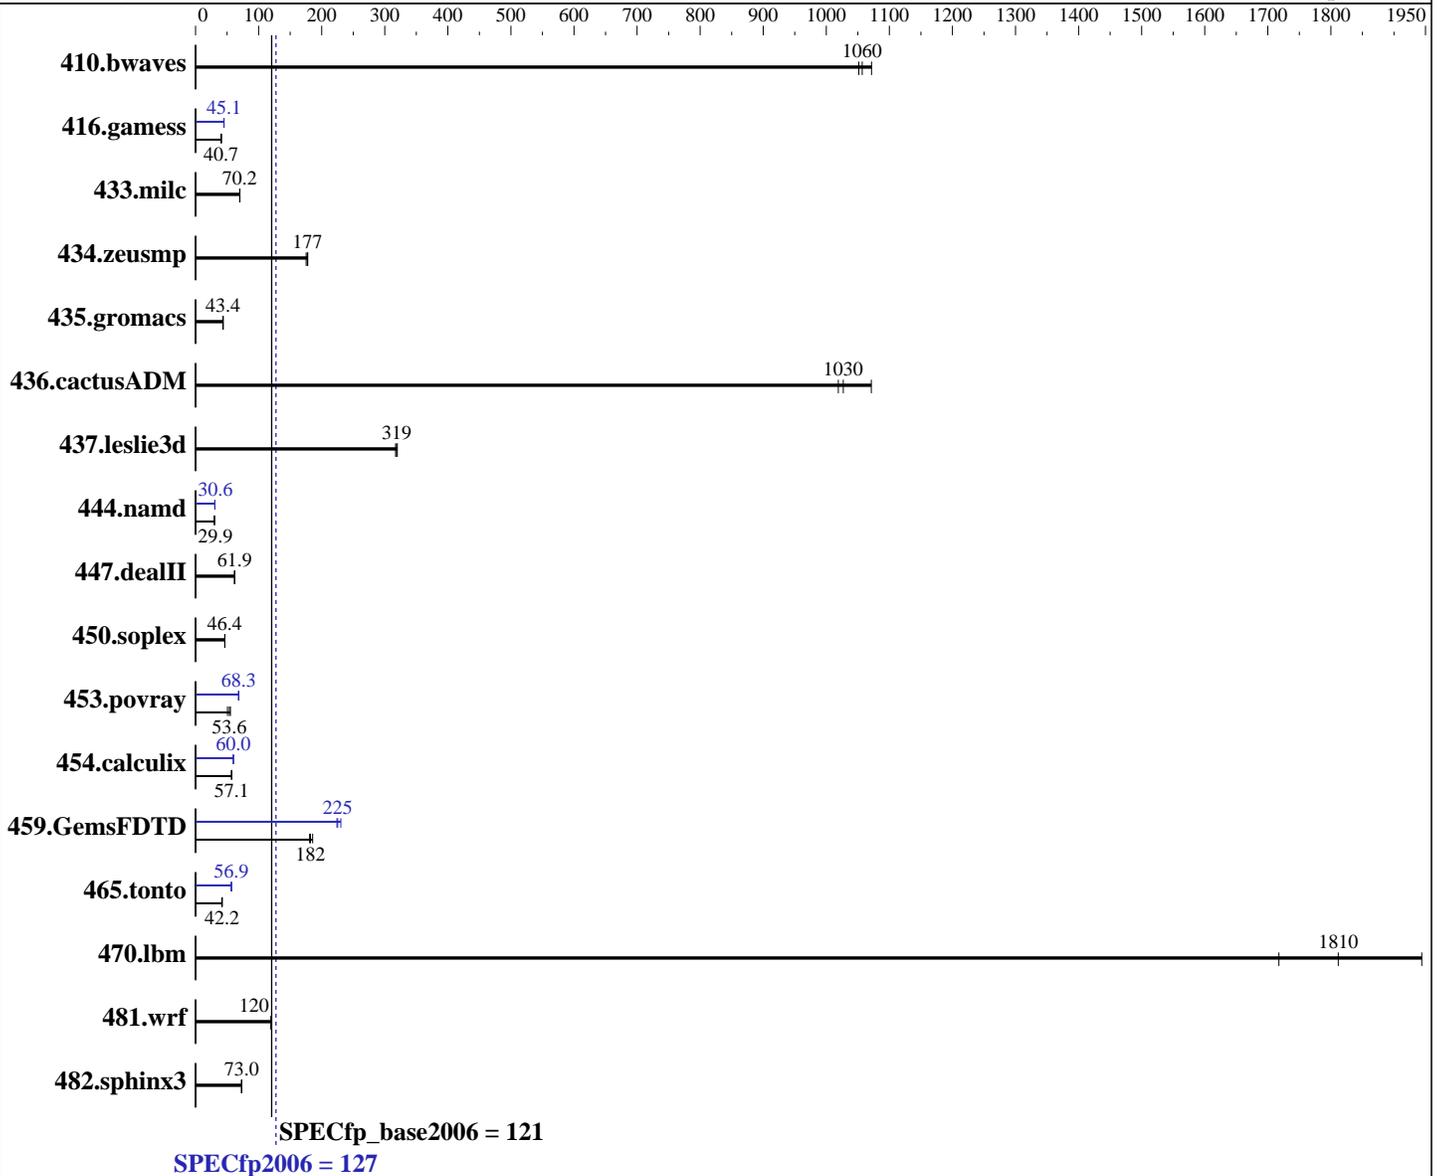

Hardware

CPU Name: Intel Xeon E7-8894 v4
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 96 cores, 4 chips, 24 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 7.2 (Maipo)
 3.10.0-327.el7.x86_64
 Compiler: C/C++: Version 17.0.0.098 of Intel C/C++ Compiler for Linux
 Auto Parallel: Yes
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = **127**

Huawei CH242 V3 (Intel Xeon E7-8894 v4)

SPECfp_base2006 = **121**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2017

Hardware Availability: Mar-2017

Software Availability: Sep-2016

L3 Cache: 60 MB I+D on chip per chip
 Other Cache: None
 Memory: 512 GB (32 x 16 GB 2Rx4 PC4-2133P-R, running at 1600 MHz)
 Disk Subsystem: 1 x 960 GB SSD
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12.7	1070	<u>12.9</u>	<u>1060</u>	12.9	1050	12.7	1070	<u>12.9</u>	<u>1060</u>	12.9	1050
416.gamess	<u>481</u>	<u>40.7</u>	480	40.8	482	40.6	<u>434</u>	<u>45.1</u>	435	45.0	434	45.1
433.milc	131	70.3	<u>131</u>	<u>70.2</u>	131	70.0	131	70.3	<u>131</u>	<u>70.2</u>	131	70.0
434.zeusmp	51.2	178	51.9	175	<u>51.3</u>	<u>177</u>	51.2	178	51.9	175	<u>51.3</u>	<u>177</u>
435.gromacs	162	44.0	<u>164</u>	<u>43.4</u>	165	43.3	162	44.0	<u>164</u>	<u>43.4</u>	165	43.3
436.cactusADM	11.2	1070	<u>11.6</u>	<u>1030</u>	11.7	1020	11.2	1070	<u>11.6</u>	<u>1030</u>	11.7	1020
437.leslie3d	29.6	317	<u>29.5</u>	<u>319</u>	29.4	320	29.6	317	<u>29.5</u>	<u>319</u>	29.4	320
444.namd	268	29.9	268	30.0	<u>268</u>	<u>29.9</u>	<u>262</u>	<u>30.6</u>	262	30.6	262	30.7
447.dealII	<u>185</u>	<u>61.9</u>	184	62.0	185	61.7	<u>185</u>	<u>61.9</u>	184	62.0	185	61.7
450.soplex	180	46.4	179	46.5	<u>180</u>	<u>46.4</u>	180	46.4	179	46.5	<u>180</u>	<u>46.4</u>
453.povray	96.3	55.3	105	50.6	<u>99.2</u>	<u>53.6</u>	<u>77.8</u>	<u>68.3</u>	78.2	68.0	77.5	68.7
454.calculix	145	57.1	144	57.2	<u>145</u>	<u>57.1</u>	<u>138</u>	<u>60.0</u>	138	60.0	138	59.9
459.GemsFDTD	57.1	186	<u>58.2</u>	<u>182</u>	58.7	181	<u>47.1</u>	<u>225</u>	46.1	230	47.3	224
465.tonto	233	42.2	<u>233</u>	<u>42.2</u>	237	41.6	174	56.5	<u>173</u>	<u>56.9</u>	173	57.0
470.lbm	8.00	1720	7.07	1940	<u>7.58</u>	<u>1810</u>	8.00	1720	7.07	1940	<u>7.58</u>	<u>1810</u>
481.wrf	93.3	120	93.1	120	<u>93.2</u>	<u>120</u>	93.3	120	93.1	120	<u>93.2</u>	<u>120</u>
482.sphinx3	267	72.9	266	73.1	<u>267</u>	<u>73.0</u>	267	72.9	266	73.1	<u>267</u>	<u>73.0</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS configuration:
 Set Power Efficiency Mode to Custom
 Set Hyper-Threading to Disabled
 Set Lock_step to disabled
 Baseboard Management Controller used to adjust the fan speed to 100
 Sysinfo program /spec/config/sysinfo.rev6993
 Revision 6993 of 2015-11-06 (b5e8d4b4eb51ed28d7f98696cbe290c1)
 running on localhost.localdomain Sat Aug 5 15:45:59 2017

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 127

Huawei CH242 V3 (Intel Xeon E7-8894 v4)

SPECfp_base2006 = 121

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2017

Hardware Availability: Mar-2017

Software Availability: Sep-2016

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-8894 v4 @ 2.40GHz

4 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 24

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

cache size : 61440 KB

From /proc/meminfo

MemTotal: 528073720 kB

HugePages_Total: 0

Hugepagesize: 2048 kB

From /etc/*release* /etc/*version*

os-release:

NAME="Red Hat Enterprise Linux Server"

VERSION="7.2 (Maipo)"

ID="rhel"

ID_LIKE="fedora"

VERSION_ID="7.2"

PRETTY_NAME="Red Hat Enterprise Linux Server 7.2 (Maipo)"

ANSI_COLOR="0;31"

CPE_NAME="cpe:/o:redhat:enterprise_linux:7.2:GA:server"

redhat-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)

system-release: Red Hat Enterprise Linux Server release 7.2 (Maipo)

system-release-cpe: cpe:/o:redhat:enterprise_linux:7.2:ga:server

uname -a:

Linux localhost.localdomain 3.10.0-327.el7.x86_64 #1 SMP Thu Oct 29 17:29:29 EDT 2015 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Aug 5 10:38

SPEC is set to: /spec

Filesystem Type Size Used Avail Use% Mounted on
/dev/sda2 ext4 796G 389G 367G 52% /

Additional information from dmidecode:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 127

Huawei CH242 V3 (Intel Xeon E7-8894 v4)

SPECfp_base2006 = 121

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2017

Hardware Availability: Mar-2017

Software Availability: Sep-2016

Platform Notes (Continued)

Warning: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS American Megatrends Inc. BLISV796 03/10/2017

Memory:

32x Micron 36ASF2G72PZ-2G1A2 16 GB 2 rank 2133 MHz, configured at 1600 MHz

(End of data from sysinfo program)

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact"

LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh10.2"

OMP_NUM_THREADS = "96"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.2

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 127

Huawei CH242 V3 (Intel Xeon E7-8894 v4)

SPECfp_base2006 = 121

CPU2006 license: 3175

Test date: Aug-2017

Test sponsor: Huawei

Hardware Availability: Mar-2017

Tested by: Huawei

Software Availability: Sep-2016

Base Portability Flags (Continued)

```

435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

C++ benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch

Fortran benchmarks:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Benchmarks using both Fortran and C:
-xCORE-AVX2 -ipo -O3 -no-prec-div -parallel -qopt-prefetch

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 127

Huawei CH242 V3 (Intel Xeon E7-8894 v4)

SPECfp_base2006 = 121

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2017

Hardware Availability: Mar-2017

Software Availability: Sep-2016

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll2 -inline-level=0
-qopt-prefetch -parallel

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xCORE-AVX2(pass 2)
-par-num-threads=1(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -inline-calloc -qopt-malloc-options=3
-auto -unroll4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2017 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 127

Huawei CH242 V3 (Intel Xeon E7-8894 v4)

SPECfp_base2006 = 121

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2017

Hardware Availability: Mar-2017

Software Availability: Sep-2016

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xCORE-AVX2 -ipo -O3 -no-prec-div -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.html>

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-BDW-V1.0.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic17.0-official-linux64.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.

For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Wed Aug 23 13:13:51 2017 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 August 2017.

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>