



# SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 159

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 55


Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

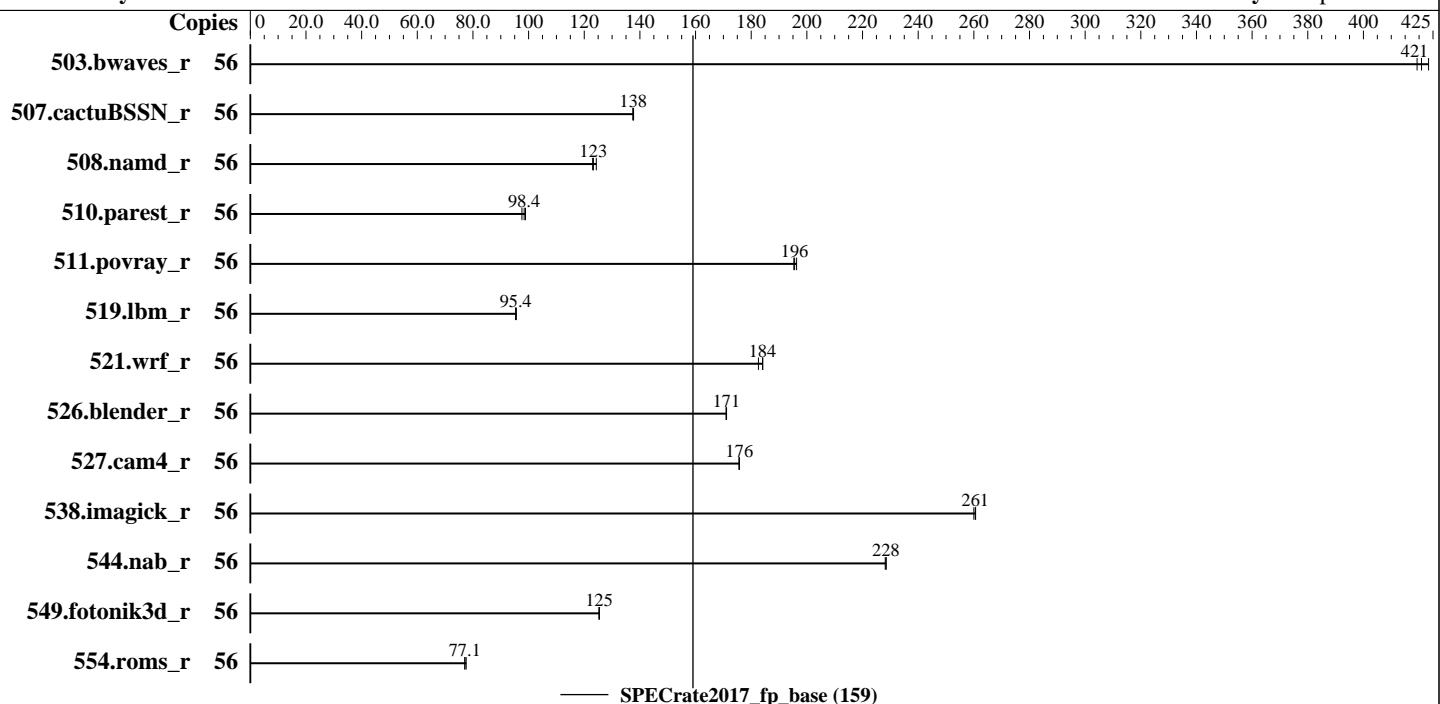

## Hardware

CPU Name: Intel Xeon Gold 6132  
 Max MHz.: 3700  
 Nominal: 2600  
 Enabled: 28 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 19.25 MB I+D on chip per chip  
 Other: None  
 Memory: 192 GB (12 x 16 GB 2Rx8 PC4-2666V-R)  
 Storage: 960 GB SATA SSD  
 Other: None

## Software

OS: SUSE Linux Enterprise Server 12 SP2 (x86\_64)  
 4.4.16-56-default  
 Compiler: C/C++: Version 18.0.0.128 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 18.0.0.128 of Intel Fortran  
 Compiler for Linux  
 Parallel: No  
 Firmware: Version 1.0.0 released Aug-2017  
 File System: btrfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 159

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Date: Dec-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	56	<b><u>1334</u></b>	<b><u>421</u></b>	1339	419	1326	423							
507.cactusBSSN_r	56	516	137	515	138	<b><u>515</u></b>	<b><u>138</u></b>							
508.namd_r	56	428	124	<b><u>431</u></b>	<b><u>123</u></b>	432	123							
510.parest_r	56	<b><u>1489</u></b>	<b><u>98.4</u></b>	1481	98.9	1501	97.6							
511.povray_r	56	669	195	<b><u>669</u></b>	<b><u>196</u></b>	666	196							
519.lbm_r	56	619	95.3	617	95.6	<b><u>619</u></b>	<b><u>95.4</u></b>							
521.wrf_r	56	<b><u>681</u></b>	<b><u>184</u></b>	681	184	687	183							
526.blender_r	56	<b><u>498</u></b>	<b><u>171</u></b>	499	171	498	171							
527.cam4_r	56	<b><u>557</u></b>	<b><u>176</u></b>	557	176	558	176							
538.imagick_r	56	<b><u>535</u></b>	<b><u>261</u></b>	534	261	536	260							
544.nab_r	56	<b><u>413</u></b>	<b><u>228</u></b>	412	228	413	228							
549.fotonik3d_r	56	<b><u>1741</u></b>	<b><u>125</u></b>	1741	125	1740	125							
554.roms_r	56	1147	77.6	<b><u>1154</u></b>	<b><u>77.1</u></b>	1154	77.1							

SPECrate2017\_fp\_base = 159

SPECrate2017\_fp\_peak = Not Run

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

LD\_LIBRARY\_PATH = "/root/cpu2017/lib/ia32:/root/cpu2017/lib/intel64:/root/cpu2017/je5.0.1-32:/root/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3 > /proc/sys/vm/drop\_caches

runcpu command invoked through numactl i.e.:

numactl --interleave=all runcpu <etc>

No: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate2017\_fp\_base = 159

PowerEdge FC640 (Intel Xeon Gold 6132, 2.60 GHz)

SPECCrate2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Date: Dec-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## General Notes (Continued)

No: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

No: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

This benchmark result is intended to provide perspective on past performance using the historical hardware and/or software described on this result page.

The system as described on this result page was formerly generally available. At the time of this publication, it may not be shipping, and/or may not be supported, and/or may fail to meet other tests of General Availability described in the SPEC OSG Policy document, <http://www.spec.org/osg/policy.html>

This measured result may not be representative of the result that would be measured were this benchmark run with hardware and software available as of the publication date.

## Platform Notes

BIOS settings:

Virtualization Technology disabled

System Profile set to Custom

CPU Power Management set to Maximum Performance

Memory Frequency set to Maximum Performance

Turbo Boost enabled

C States disabled

Memory Patrol Scrub disabled

PCI ASPM L1 Link Power Management disabled

Sysinfo program /root/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-u8yg Fri Dec 15 11:59:35 2017

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 6132 CPU @ 2.60GHz

2 "physical id"s (chips)

56 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 14

siblings : 28

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 159

PowerEdge FC640 (Intel Xeon Gold 6132, 2.60 GHz)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Date: Dec-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Platform Notes (Continued)

```
physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
physical 1: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 14
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                56
On-line CPU(s) list:   0-55
Thread(s) per core:    2
Core(s) per socket:    14
Socket(s):              2
NUMA node(s):           4
Vendor ID:              GenuineIntel
CPU family:             6
Model:                 85
Model name:             Intel(R) Xeon(R) Gold 6132 CPU @ 2.60GHz
Stepping:               4
CPU MHz:                2600.116
BogoMIPS:               5200.23
Virtualization:         VT-x
L1d cache:              32K
L1i cache:              32K
L2 cache:                1024K
L3 cache:                19712K
NUMA node0 CPU(s):      0,4,8,12,16,20,24,28,32,36,40,44,48,52
NUMA node1 CPU(s):      1,5,9,13,17,21,25,29,33,37,41,45,49,53
NUMA node2 CPU(s):      2,6,10,14,18,22,26,30,34,38,42,46,50,54
NUMA node3 CPU(s):      3,7,11,15,19,23,27,31,35,39,43,47,51,55
Flags:                  fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
                        pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
                        lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc
                        aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg
                        fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes
                        xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb pln pts dtherm intel_pt
                        tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2
                        erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd
                        avx512bw avx512vl xsaveopt xgetbv1 cqm_llc cqm_occup_llc
```

```
/proc/cpuinfo cache data
cache size : 19712 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

```
available: 4 nodes (0-3)
node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52
node 0 size: 46971 MB
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate2017\_fp\_base = 159

PowerEdge FC640 (Intel Xeon Gold 6132, 2.60 GHz)

SPECCrate2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Date: Dec-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Platform Notes (Continued)

```
node 0 free: 46611 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53
node 1 size: 48369 MB
node 1 free: 48116 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54
node 2 size: 48369 MB
node 2 free: 48102 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55
node 3 size: 48366 MB
node 3 free: 48111 MB
node distances:
node   0   1   2   3
  0: 10  21  11  21
  1: 21  10  21  11
  2: 11  21  10  21
  3: 21  11  21  10
```

```
From /proc/meminfo
MemTotal:      196687100 kB
HugePages_Total:       0
Hugepagesize:     2048 kB
```

```
From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 2
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP2"
  VERSION_ID="12.2"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP2"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp2"
```

```
uname -a:
Linux linux-u8yg 4.4.16-56-default #1 SMP Mon Aug 8 14:24:26 UTC 2016 (5b281a8) x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Dec 15 07:16
```

```
SPEC is set to: /root/cpu2017
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda1        btrfs  921G   34G  887G   4%  /
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate2017\_fp\_base = 159

PowerEdge FC640 (Intel Xeon Gold 6132, 2.60 GHz)

SPECCrate2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Date: Dec-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Platform Notes (Continued)

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 1.0.0 08/10/2017

Memory:

12x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666

4x Not Specified Not Specified

(End of data from sysinfo program)

## Compiler Version Notes

=====

CC 519.lbm\_r(base) 538.imagick\_r(base) 544.nab\_r(base)

=====

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CXXC 508.namd\_r(base) 510.parest\_r(base)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 511.povray\_r(base) 526.blender\_r(base)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

FC 507.cactuBSSN\_r(base)

=====

icpc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

icc (ICC) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

ifort (IFORT) 18.0.0 20170811

Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate2017\_fp\_base = 159

PowerEdge FC640 (Intel Xeon Gold 6132, 2.60 GHz)

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Date: Dec-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Compiler Version Notes (Continued)

```
=====
FC 503.bwaves_r(base) 549.fotonik3d_r(base) 554.roms_r(base)
=====
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====
```

```
=====
CC 521.wrf_r(base) 527.cam4_r(base)
=====
```

```
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
=====
```

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

## Base Portability Flags

503.bwaves\_r: -DSPEC\_LP64

507.cactuBSSN\_r: -DSPEC\_LP64

508.namd\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge FC640 (Intel Xeon Gold 6132, 2.60 GHz)

SPECrate2017\_fp\_base = 159

SPECrate2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Dec-2017

Hardware Availability: Sep-2017

Software Availability: Sep-2017

## Base Portability Flags (Continued)

```
510.parest_r: -DSPEC_LP64  
511.povray_r: -DSPEC_LP64  
519.lbm_r: -DSPEC_LP64  
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian  
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char  
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG  
538.imagick_r: -DSPEC_LP64  
544.nab_r: -DSPEC_LP64  
549.fotonik3d_r: -DSPEC_LP64  
554.roms_r: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX2 -ipo -O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

## Base Other Flags

C benchmarks:

```
-m64 -std=c11
```

(Continued on next page)



# SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2018 Standard Performance Evaluation Corporation

Dell Inc.

SPECCrate2017\_fp\_base = 159

PowerEdge FC640 (Intel Xeon Gold 6132, 2.60 GHz)

SPECCrate2017\_fp\_peak = Not Run

CPU2017 License: 55

Test Date: Dec-2017

Test Sponsor: Dell Inc.

Hardware Availability: Sep-2017

Tested by: Dell Inc.

Software Availability: Sep-2017

## Base Other Flags (Continued)

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revD.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU2017 v1.0.2 on 2017-12-15 12:59:34-0500.

Report generated on 2018-10-31 16:40:52 by CPU2017 PDF formatter v6067.

Originally published on 2018-02-27.