



SPEC® CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940xa (Intel Xeon Platinum 8168,
2.70GHz)

SPECrate2017_fp_base = 453

SPECrate2017_fp_peak = 459

CPU2017 License: 55


Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: May-2018

Tested by: Dell Inc.

Software Availability: Feb-2018

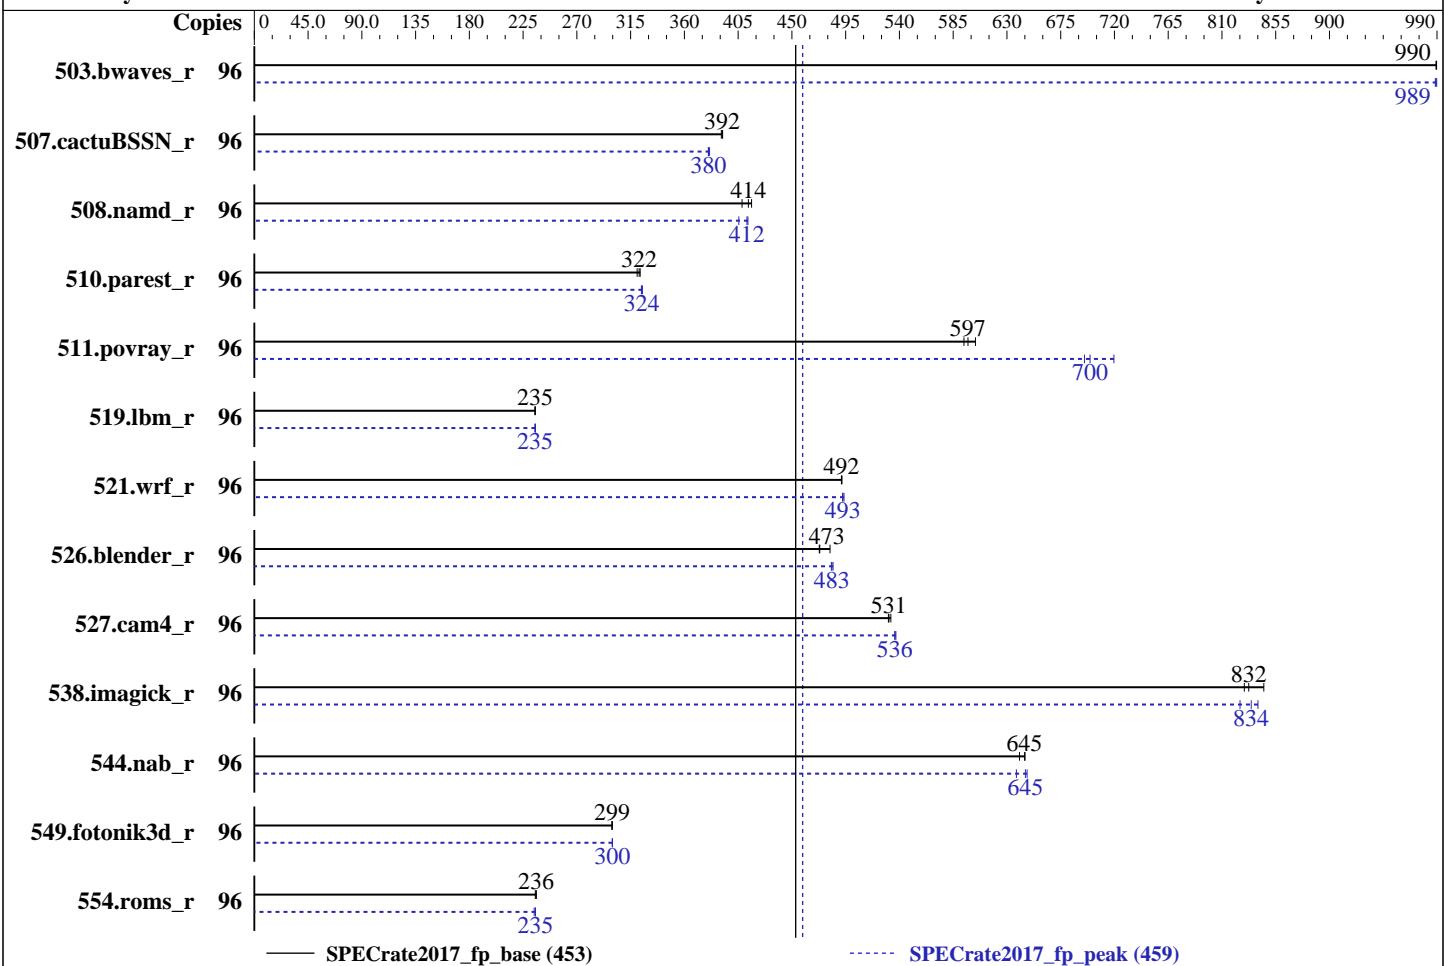

— SPECrate2017_fp_base (453)
- - - - - SPECrate2017_fp_peak (459)

Hardware

CPU Name: Intel Xeon Platinum 8168
Max MHz.: 3700
Nominal: 2700
Enabled: 96 cores, 4 chips
Orderable: 2,4 chips
Cache L1: 32 KB I + 32 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 33 MB I+D on chip per chip
Other: None
Memory: 768 GB (48 x 16 GB 2Rx8 PC4-2666V-R)
Storage: 1 x 480 GB SATA SSD
Other: None

Software

OS: SUSE Linux Enterprise Server 12 SP3
4.4.114-94.11-default
Compiler: C/C++: Version 18.0.0.128 of Intel C/C++
Compiler for Linux;
Fortran: Version 18.0.0.128 of Intel Fortran
Compiler for Linux
Parallel: No
Firmware: Version 0.3.1 released Feb-2018
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 64-bit
Other: None



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940xa (Intel Xeon Platinum 8168,
2.70GHz)

SPECrate2017_fp_base = 453

SPECrate2017_fp_peak = 459

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: May-2018

Tested by: Dell Inc.

Software Availability: Feb-2018

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
503.bwaves_r	96	973	990	973	989	973	990	96	974	989	973	989	973	990	973	990
507.cactusBSSN_r	96	311	391	310	392	310	392	96	320	380	319	381	320	380	320	380
508.namd_r	96	223	408	219	416	221	414	96	221	413	221	412	225	406	225	406
510.parest_r	96	784	320	778	323	780	322	96	774	324	773	325	775	324	775	324
511.povray_r	96	371	604	377	594	375	597	96	312	720	320	700	323	695	323	695
519.lbm_r	96	430	235	430	235	431	235	96	430	235	431	235	430	235	430	235
521.wrf_r	96	437	492	437	492	438	491	96	436	493	437	492	436	494	436	494
526.blender_r	96	303	482	309	473	309	473	96	302	483	302	484	303	483	303	483
527.cam4_r	96	316	531	316	531	315	533	96	313	536	313	537	313	536	313	536
538.imagick_r	96	283	845	288	829	287	832	96	286	834	284	840	289	825	289	825
544.nab_r	96	252	641	251	645	250	645	96	250	647	250	645	253	638	253	638
549.fotonik3d_r	96	1249	299	1249	300	1249	299	96	1249	300	1248	300	1248	300	1248	300
554.roms_r	96	646	236	649	235	647	236	96	648	235	651	234	648	235	648	235

SPECrate2017_fp_base = 453

SPECrate2017_fp_peak = 459

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

General Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH = "/root/cpu2017/lib/ia32:/root/cpu2017/lib/intel64:/root/cpu2017/je5.0.1-32:/root/cpu2017/je5.0.1-64"

Binaries compiled on a system with 1x Intel Core i7-4790 CPU + 32GB RAM memory using Redhat Enterprise Linux 7.4

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Transparent Huge Pages enabled by default

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940xa (Intel Xeon Platinum 8168,
2.70GHz)

SPECrate2017_fp_base = 453

SPECrate2017_fp_peak = 459

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: May-2018

Tested by: Dell Inc.

Software Availability: Feb-2018

General Notes (Continued)

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>
```

Dell PowerEdge R840 and PowerEdge R940xa are electronically equivalent.
This result was measured on Dell PowerEdge R840.

Platform Notes

BIOS settings:

Sub NUJMA Cluster disabled

Virtualization Technology disabled

System Profile set to Custom

CPU Performance set to Maximum Performance

C States set to Autonomous

C1E disabled

Uncore Frequency set to Dynamic

Energy Efficiency Policy set to Performance

Memory Patrol Scrub disabled

Logical Processor disabled

CPU Interconnect Bus Link Power Management disabled

PCI ASPM L1 Link Power Management disabled

Sysinfo program /root/cpu2017/bin/sysinfo

Rev: r5797 of 2017-06-14 96c45e4568ad54c135fd618bcc091c0f

running on linux-v604 Mon Mar 26 10:48:53 2018

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Platinum 8168 CPU @ 2.70GHz

4 "physical id"s (chips)

96 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 24

physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29

From lscpu:

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940xa (Intel Xeon Platinum 8168,
2.70GHz)

SPECrate2017_fp_base = 453

SPECrate2017_fp_peak = 459

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: May-2018

Tested by: Dell Inc.

Software Availability: Feb-2018

Platform Notes (Continued)

Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 96
On-line CPU(s) list: 0-95
Thread(s) per core: 1
Core(s) per socket: 24
Socket(s): 4
NUMA node(s): 4
Vendor ID: GenuineIntel
CPU family: 6
Model: 85
Model name: Intel(R) Xeon(R) Platinum 8168 CPU @ 2.70GHz
Stepping: 4
CPU MHz: 2693.690
BogoMIPS: 5387.38
Virtualization: VT-x
L1d cache: 32K
L1i cache: 32K
L2 cache: 1024K
L3 cache: 33792K
NUMA node0 CPU(s): 0,4,8,12,16,20,24,28,32,36,40,44,48,52,56,60,64,68,72,76,80,84,88,92
NUMA node1 CPU(s): 1,5,9,13,17,21,25,29,33,37,41,45,49,53,57,61,65,69,73,77,81,85,89,93
NUMA node2 CPU(s): 2,6,10,14,18,22,26,30,34,38,42,46,50,54,58,62,66,70,74,78,82,86,90,94
NUMA node3 CPU(s): 3,7,11,15,19,23,27,31,35,39,43,47,51,55,59,63,67,71,75,79,83,87,91,95
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave avx f16c rdrand lahf_lm abm 3dnowprefetch ida arat epb invpcid_single pln pts dtherm intel_pt rsb_ctxtsw spec_ctrl retrpline kaiser tpr_shadow vnmi flexpriority ept vpid fsgsbase tsc_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqmq_llc cqmq_occrap_llc pku ospke

/proc/cpuinfo cache data
cache size : 33792 KB

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 4 nodes (0-3)

node 0 cpus: 0 4 8 12 16 20 24 28 32 36 40 44 48 52 56 60 64 68 72 76 80 84 88 92

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940xa (Intel Xeon Platinum 8168,
2.70GHz)

SPECrate2017_fp_base = 453

SPECrate2017_fp_peak = 459

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: May-2018

Tested by: Dell Inc.

Software Availability: Feb-2018

Platform Notes (Continued)

```
node 0 size: 192124 MB
node 0 free: 191807 MB
node 1 cpus: 1 5 9 13 17 21 25 29 33 37 41 45 49 53 57 61 65 69 73 77 81 85 89 93
node 1 size: 193525 MB
node 1 free: 193192 MB
node 2 cpus: 2 6 10 14 18 22 26 30 34 38 42 46 50 54 58 62 66 70 74 78 82 86 90 94
node 2 size: 193525 MB
node 2 free: 193273 MB
node 3 cpus: 3 7 11 15 19 23 27 31 35 39 43 47 51 55 59 63 67 71 75 79 83 87 91 95
node 3 size: 193522 MB
node 3 free: 193267 MB
node distances:
node   0   1   2   3
  0: 10  21  21  21
  1: 21  10  21  21
  2: 21  21  10  21
  3: 21  21  21  10

From /proc/meminfo
MemTotal:      791242696 kB
HugePages_Total:        0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 12 SP3

From /etc/*release* /etc/*version*
SuSE-release:
  SUSE Linux Enterprise Server 12 (x86_64)
  VERSION = 12
  PATCHLEVEL = 3
  # This file is deprecated and will be removed in a future service pack or release.
  # Please check /etc/os-release for details about this release.
os-release:
  NAME="SLES"
  VERSION="12-SP3"
  VERSION_ID="12.3"
  PRETTY_NAME="SUSE Linux Enterprise Server 12 SP3"
  ID="sles"
  ANSI_COLOR="0;32"
  CPE_NAME="cpe:/o:suse:sles:12:sp3"

uname -a:
Linux linux-v604 4.4.114-94.11-default #1 SMP Thu Feb 1 19:28:26 UTC 2018 (4309ff9)
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Mar 23 14:22
```

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940xa (Intel Xeon Platinum 8168,
2.70GHz)

SPECrate2017_fp_base = 453

SPECrate2017_fp_peak = 459

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: May-2018

Tested by: Dell Inc.

Software Availability: Feb-2018

Platform Notes (Continued)

SPEC is set to: /root/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda3	xfs	415G	34G	381G	9%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

BIOS Dell Inc. 0.3.1 02/23/2018

Memory:

24x 00AD00B300AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666
24x 00AD063200AD HMA82GR7AFR8N-VK 16 GB 2 rank 2666

(End of data from sysinfo program)

Compiler Version Notes

=====

CC 519.lbm_r(base) 538.imagick_r(base, peak) 544.nab_r(base)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 519.lbm_r(peak) 544.nab_r(peak)

icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CXXC 508.namd_r(base) 510.parest_r(base)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CXXC 508.namd_r(peak) 510.parest_r(peak)

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940xa (Intel Xeon Platinum 8168,
2.70GHz)

SPECrate2017_fp_base = 453

SPECrate2017_fp_peak = 459

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: May-2018

Software Availability: Feb-2018

Compiler Version Notes (Continued)

=====

CC 511.povray_r(base) 526.blender_r(base)

=====

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

CC 511.povray_r(peak) 526.blender_r(peak)

=====

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

FC 507.cactubSSN_r(base)

=====

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

FC 507.cactubSSN_r(peak)

=====

icpc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

=====

FC 503.bwaves_r(base, peak) 549.fotonik3d_r(base, peak) 554.roms_r(base)

=====

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

(Continued on next page)



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940xa (Intel Xeon Platinum 8168,
2.70GHz)

SPECrate2017_fp_base = 453

SPECrate2017_fp_peak = 459

CPU2017 License: 55

Test Date: Mar-2018

Test Sponsor: Dell Inc.

Hardware Availability: May-2018

Tested by: Dell Inc.

Software Availability: Feb-2018

Compiler Version Notes (Continued)

=====

FC 554.roms_r(peak)

=====

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf_r(base) 527.cam4_r(base)

=====

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

CC 521.wrf_r(peak) 527.cam4_r(peak)

=====

ifort (IFORT) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.
icc (ICC) 18.0.0 20170811
Copyright (C) 1985-2017 Intel Corporation. All rights reserved.

=====

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

fort

Benchmarks using both Fortran and C:

fort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc fort



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940xa (Intel Xeon Platinum 8168,
2.70GHz)

SPECrate2017_fp_base = 453

SPECrate2017_fp_peak = 459

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: May-2018

Software Availability: Feb-2018

Base Portability Flags

```
503.bwaves_r: -DSPEC_LP64
507.cactubSSN_r: -DSPEC_LP64
508.namd_r: -DSPEC_LP64
510.parest_r: -DSPEC_LP64
511.povray_r: -DSPEC_LP64
519.lbm_r: -DSPEC_LP64
521.wrf_r: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
526.blender_r: -DSPEC_LP64 -DSPEC_LINUX -funsigned-char
527.cam4_r: -DSPEC_LP64 -DSPEC_CASE_FLAG
538.imagick_r: -DSPEC_LP64
544.nab_r: -DSPEC_LP64
549.fotonik3d_r: -DSPEC_LP64
554.roms_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
```

C++ benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte
```

Benchmarks using both C and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=3 -nostandard-realloc-lhs
-align array32byte
```



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940xa (Intel Xeon Platinum 8168,
2.70GHz)

SPECrate2017_fp_base = 453

SPECrate2017_fp_peak = 459

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: May-2018

Software Availability: Feb-2018

Base Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

ifort icc

Benchmarks using both C and C++:

icpc icc

Benchmarks using Fortran, C, and C++:

icpc icc ifort

Peak Portability Flags

Same as Base Portability Flags



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940xa (Intel Xeon Platinum 8168,
2.70GHz)

SPECrate2017_fp_base = 453

SPECrate2017_fp_peak = 459

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: May-2018

Software Availability: Feb-2018

Peak Optimization Flags

C benchmarks:

```
519.lbm_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

```
538.imagick_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3
```

544.nab_r: Same as 519.lbm_r

C++ benchmarks:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Fortran benchmarks:

```
503.bwaves_r: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=3  
-nostandard-realloc-lhs -align array32byte
```

549.fotonik3d_r: Same as 503.bwaves_r

```
554.roms_r: -prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512  
-O3 -no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs  
-align array32byte
```

Benchmarks using both Fortran and C:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```

Benchmarks using both C and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3
```

Benchmarks using Fortran, C, and C++:

```
-prof-gen(pass 1) -prof-use(pass 2) -ipo -xCORE-AVX512 -O3  
-no-prec-div -qopt-prefetch -ffinite-math-only  
-qopt-mem-layout-trans=3 -nostandard-realloc-lhs -align array32byte
```



SPEC CPU2017 Floating Point Rate Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R940xa (Intel Xeon Platinum 8168,
2.70GHz)

SPECrate2017_fp_base = 453

SPECrate2017_fp_peak = 459

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: Mar-2018

Hardware Availability: May-2018

Software Availability: Feb-2018

Peak Other Flags

C benchmarks:

-m64 -std=c11

C++ benchmarks:

-m64

Fortran benchmarks:

-m64

Benchmarks using both Fortran and C:

-m64 -std=c11

Benchmarks using both C and C++:

-m64 -std=c11

Benchmarks using Fortran, C, and C++:

-m64 -std=c11

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.html>
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2017-10-19.xml>
<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge14G-revC.xml>

SPEC is a registered trademark of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU2017 v1.0.2 on 2018-03-25 22:48:53-0400.

Report generated on 2019-02-19 13:50:50 by CPU2017 PDF formatter v6067.

Originally published on 2019-02-19.