



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD650  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_fp\_base = 144

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017


Test Sponsor: Lenovo Global Technology

Tested by: Lenovo Global Technology

Test Date: Oct-2019

Hardware Availability: Apr-2019

Software Availability: May-2019

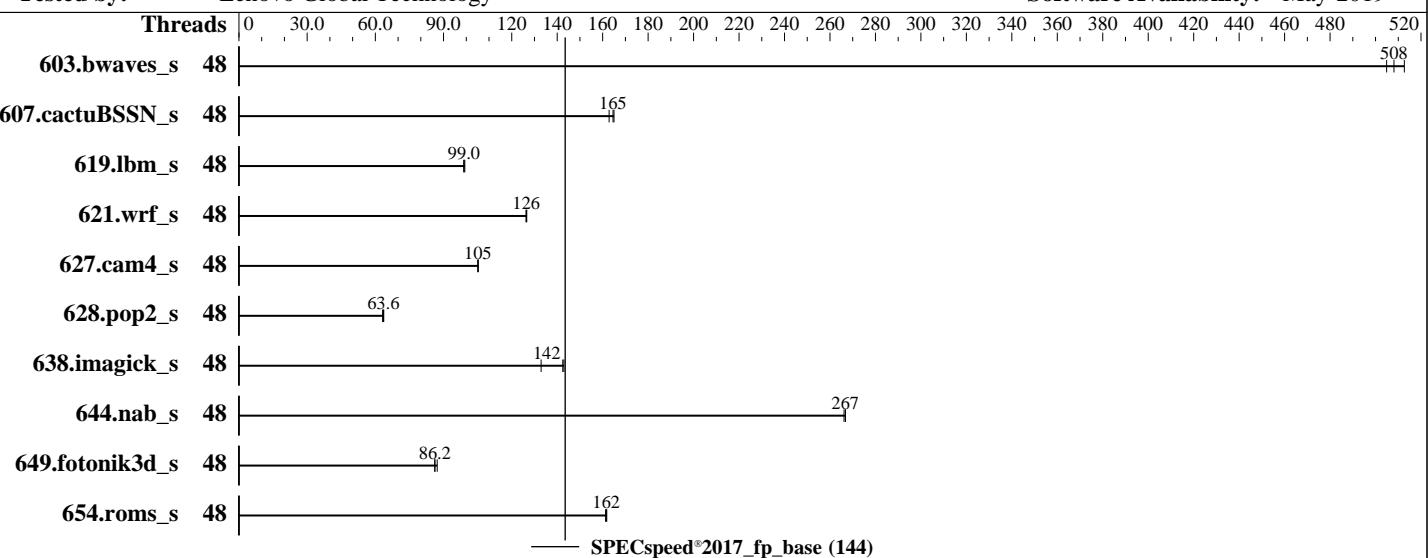

### Hardware

CPU Name: Intel Xeon Platinum 8260  
Max MHz: 3900  
Nominal: 2400  
Enabled: 48 cores, 2 chips  
Orderable: 1,2 chips  
Cache L1: 32 KB I + 32 KB D on chip per core  
L2: 1 MB I+D on chip per core  
L3: 35.75 MB I+D on chip per chip  
Other: None  
Memory: 384 GB (12 x 32 GB 2Rx4 PC4-2933Y-R)  
Storage: 1 x 480 GB SATA SSD  
Other: None

### Software

OS: Red Hat Enterprise Linux Server release 7.6 (Maipo)  
Compiler: Kernel 3.10.0-957.el7.x86\_64  
C/C++: Version 19.0.4.227 of Intel C/C++ Compiler for Linux;  
Fortran: Version 19.0.4.227 of Intel Fortran  
Compiler for Linux  
Parallel: Yes  
Firmware: Lenovo BIOS Version OTE142F 2.30 released Aug-2019 tested as OTE141F 2.30 Jul-2019  
File System: xfs  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: Not Applicable  
Other: None  
Power Management: --



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD650  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_fp\_base = 144

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

## Results Table

Benchmark	Base								Peak							
	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds
603.bwaves_s	48	115	513	<u>116</u>	<u>508</u>	117	505									
607.cactuBSSN_s	48	101	165	<u>101</u>	<u>165</u>	102	163									
619.lbm_s	48	<b>52.9</b>	<b>99.0</b>	52.7	99.4	53.0	98.9									
621.wrf_s	48	104	127	105	126	<u>105</u>	<u>126</u>									
627.cam4_s	48	<u>84.3</u>	<u>105</u>	84.2	105	84.3	105									
628.pop2_s	48	<u>187</u>	<u>63.6</u>	186	63.7	188	63.2									
638.imagick_s	48	109	133	<u>101</u>	<u>142</u>	101	143									
644.nab_s	48	65.6	266	65.5	267	<u>65.5</u>	<u>267</u>									
649.fotonik3d_s	48	105	87.2	<u>106</u>	<u>86.2</u>	106	86.1									
654.roms_s	48	<b>97.4</b>	<b>162</b>	97.3	162	97.6	161									
SPECspeed®2017_fp_base = 144																
SPECspeed®2017_fp_peak = Not Run																

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## General Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2017-1.0.5-ic19.0u4/lib/intel64"

OMP\_STACKSIZE = "192M"

Binaries compiled on a system with 1x Intel Core i9-799X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

sync; echo 3> /proc/sys/vm/drop\_caches

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3640 (Spectre variant 3a) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2018-3639 (Spectre variant 4) is mitigated in the system as tested and documented.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD650  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_fp\_base = 144

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

## Platform Notes

BIOS configuration:

Choose Operating Mode set to Maximum Performance and then set it to Custom Mode

C1 Enhanced Mode set to Enable

MONITOR/MWAIT set to Enable

Hyper-Threading set to Disable

Adjacent Cache Prefetch set to Disable

Sysinfo program /home/cpu2017-1.0.5-ic19.0u4/bin/sysinfo

Rev: r5974 of 2018-05-19 9bcde8f2999c33d61f64985e45859ea9

running on localhost.localdomain Tue Oct 15 10:33:34 2019

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Xeon(R) Platinum 8260 CPU @ 2.40GHz
  2 "physical id"s (chips)
  48 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
  cpu cores : 24
  siblings   : 24
  physical 0: cores 0 1 2 3 4 5 6 8 9 10 11 12 13 16 17 18 19 20 21 25 26 27 28 29
  physical 1: cores 0 1 2 3 4 5 6 8 10 11 12 13 16 17 18 19 20 21 24 25 26 27 28 29
```

From lscpu:

```
Architecture:           x86_64
CPU op-mode(s):        32-bit, 64-bit
Byte Order:            Little Endian
CPU(s):                48
On-line CPU(s) list:  0-47
Thread(s) per core:   1
Core(s) per socket:   24
Socket(s):             2
NUMA node(s):          2
Vendor ID:             GenuineIntel
CPU family:            6
Model:                 85
Model name:            Intel(R) Xeon(R) Platinum 8260 CPU @ 2.40GHz
Stepping:               6
CPU MHz:               2400.000
BogoMIPS:              4800.00
Virtualization:        VT-x
L1d cache:             32K
L1i cache:             32K
L2 cache:              1024K
L3 cache:              36608K
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD650  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_fp\_base = 144

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

### Platform Notes (Continued)

NUMA node0 CPU(s): 0-23  
NUMA node1 CPU(s): 24-47  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc aperfmpfperf eagerfpu pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch epb cat\_l3 cdp\_l3 intel\_ppin intel\_pt ssbd mba ibrs ibpb stibp ibrs\_enhanced tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmil hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 cqmq\_llc cqmq\_occup\_llc cqmq\_mbm\_total cqmq\_mbm\_local dtherm ida arat pln pts pkru ospke avx512\_vnni spec\_ctrl intel\_stibp flush\_lld arch\_capabilities

/proc/cpuinfo cache data  
cache size : 36608 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23  
node 0 size: 196280 MB  
node 0 free: 191413 MB  
node 1 cpus: 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47  
node 1 size: 196608 MB  
node 1 free: 191866 MB  
node distances:  
node 0 1  
0: 10 21  
1: 21 10

From /proc/meminfo  
MemTotal: 395878416 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*

os-release:  
NAME="Red Hat Enterprise Linux Server"  
VERSION="7.6 (Maipo)"  
ID="rhel"  
ID\_LIKE="fedora"  
VARIANT="Server"  
VARIANT\_ID="server"  
VERSION\_ID="7.6"  
PRETTY\_NAME="Red Hat Enterprise Linux Server 7.6 (Maipo)"  
redhat-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD650  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_fp\_base = 144

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

## Platform Notes (Continued)

```
system-release: Red Hat Enterprise Linux Server release 7.6 (Maipo)
system-release-cpe: cpe:/o:redhat:enterprise_linux:7.6:ga:server
```

```
uname -a:
```

```
Linux localhost.localdomain 3.10.0-957.el7.x86_64 #1 SMP Thu Oct 4 20:48:51 UTC 2018
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

```
CVE-2017-5754 (Meltdown): Not affected
```

```
CVE-2017-5753 (Spectre variant 1): Mitigation: Load fences, __user pointer sanitization
```

```
CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS
```

```
run-level 3 Oct 15 10:32
```

```
SPEC is set to: /home/cpu2017-1.0.5-ic19.0u4
```

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/mapper/rhel-root	xfs	445G	53G	393G	12%	/

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

```
BIOS Lenovo -[OTE141F-2.30]- 07/02/2019
```

```
Memory:
```

```
4x NO DIMM NO DIMM
12x Samsung M393A4K40CB2-CVF 32 GB 2 rank 2933
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====
C | 619.lbm_s(base) 638.imagick_s(base) 644.nab_s(base)
-----
```

```
Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

```
=====
C++, C, Fortran | 607.cactuBSSN_s(base)
-----
```

```
Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,
Version 19.0.4.227 Build 20190416
Copyright (C) 1985-2019 Intel Corporation. All rights reserved.
-----
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD650  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_fp\_base = 144

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

## Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

---

=====

Fortran | 603.bwaves\_s(base) 649.fotonik3d\_s(base) 654.roms\_s(base)

---

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

---

=====

Fortran, C | 621.wrf\_s(base) 627.cam4\_s(base) 628.pop2\_s(base)

---

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

---

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD650  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_fp\_base = 144

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactubSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.html>  
<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic18.0-official-linux64.2019-04-02.xml>  
<http://www.spec.org/cpu2017/flags/Lenovo-Platform-SPECcpu2017-Flags-V1.2-CLX-F.xml>



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2019 Standard Performance Evaluation Corporation

## Lenovo Global Technology

ThinkSystem SD650  
(2.40 GHz, Intel Xeon Platinum 8260)

SPECspeed®2017\_fp\_base = 144

SPECspeed®2017\_fp\_peak = Not Run

CPU2017 License: 9017

Test Date: Oct-2019

Test Sponsor: Lenovo Global Technology

Hardware Availability: Apr-2019

Tested by: Lenovo Global Technology

Software Availability: May-2019

SPEC CPU and SPECspeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.0.5 on 2019-10-15 10:33:34-0400.

Report generated on 2019-11-12 14:56:54 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-12.