



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6238,  
2.10GHz)

**SPECSpeed®2017\_fp\_base = 134**

**SPECSpeed®2017\_fp\_peak = 135**

CPU2017 License: 9019


**Test Date:** Oct-2019

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Apr-2019

**Tested by:** Cisco Systems

**Software Availability:** May-2019

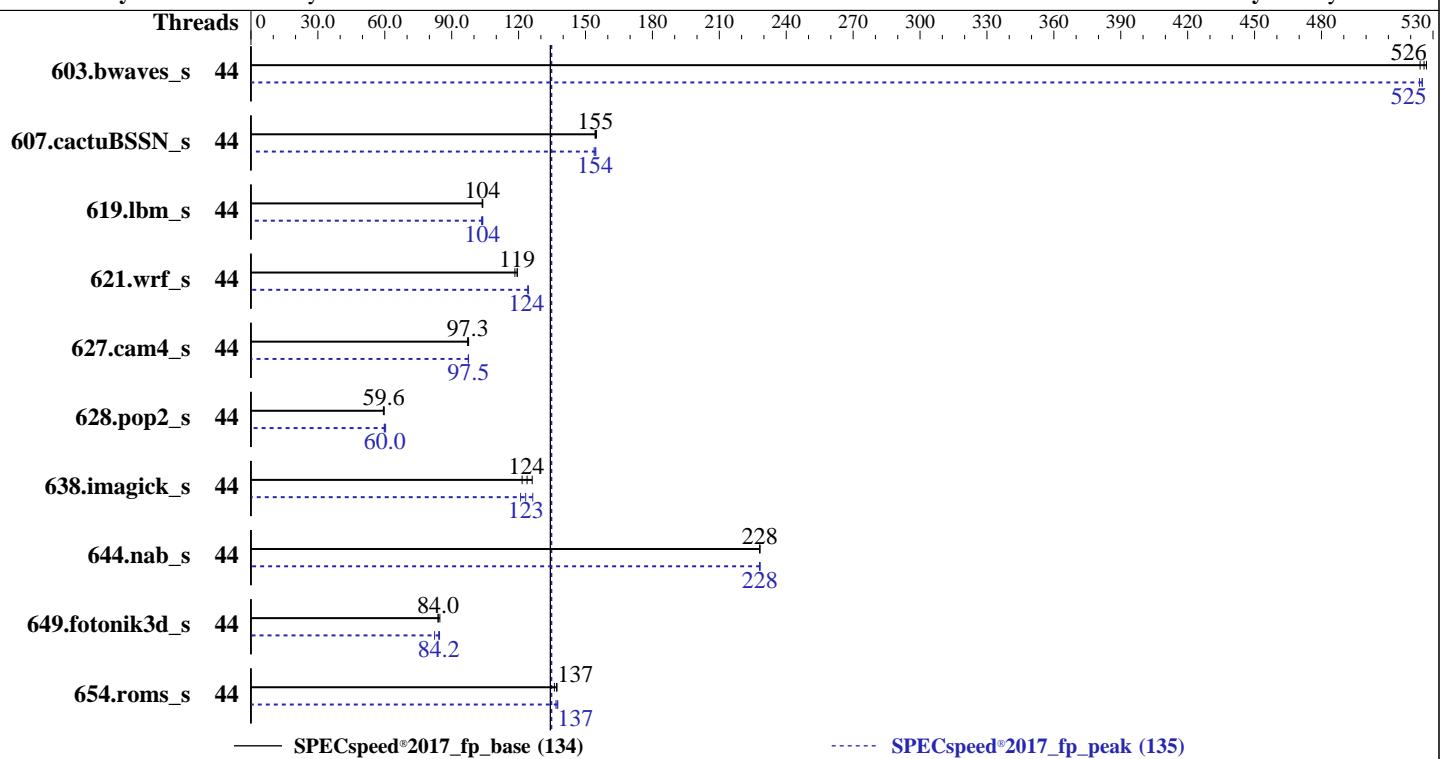

### Hardware

CPU Name: Intel Xeon Gold 6238  
 Max MHz: 3700  
 Nominal: 2100  
 Enabled: 44 cores, 2 chips  
 Orderable: 1,2 Chips  
 Cache L1: 32 KB I + 32 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 30.25 MB I+D on chip per chip  
 Other: None  
 Memory: 768 GB (24 x 32 GB 2Rx4 PC4-2933V-R)  
 Storage: 1 x 240 GB M.2 SATA SSD  
 Other: None

### Software

OS: SUSE Linux Enterprise Server 15 (x86\_64)  
 4.12.14-23-default  
 Compiler: C/C++: Version 19.0.4.227 of Intel C/C++  
 Compiler for Linux;  
 Fortran: Version 19.0.4.227 of Intel Fortran  
 Compiler for Linux  
 Parallel: Yes  
 Firmware: Version 4.0.4g released Jul-2019  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 64-bit  
 Other: None  
 Power Management: default



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6238,  
2.10GHz)

**SPECSpeed®2017\_fp\_base = 134**

**SPECSpeed®2017\_fp\_peak = 135**

CPU2017 License: 9019

Test Date: Oct-2019

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2019

Tested by: Cisco Systems

Software Availability: May-2019

## Results Table

Benchmark	Base							Peak						
	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Threads	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
603.bwaves_s	44	<b><u>112</u></b>	<b><u>526</u></b>	112	527	113	524	44	<b><u>113</u></b>	<b><u>524</u></b>	<b><u>112</u></b>	<b><u>525</u></b>	112	525
607.cactuBSSN_s	44	<b><u>108</u></b>	<b><u>155</u></b>	108	154	108	155	44	<b><u>108</u></b>	<b><u>154</u></b>	108	154	108	155
619.lbm_s	44	50.4	104	<b><u>50.4</u></b>	<b><u>104</u></b>	50.5	104	44	50.7	103	<b><u>50.5</u></b>	<b><u>104</u></b>	50.4	104
621.wrf_s	44	111	119	112	118	<b><u>111</u></b>	<b><u>119</u></b>	44	<b><u>106</u></b>	<b><u>124</u></b>	107	124	106	124
627.cam4_s	44	<b><u>91.1</u></b>	<b><u>97.3</u></b>	91.2	97.2	90.8	97.6	44	90.9	97.5	<b><u>90.9</u></b>	<b><u>97.5</u></b>	90.9	97.5
628.pop2_s	44	200	59.4	199	59.7	<b><u>199</u></b>	<b><u>59.6</u></b>	44	<b><u>198</u></b>	<b><u>60.0</u></b>	199	59.8	197	60.4
638.imagick_s	44	114	126	119	122	<b><u>117</u></b>	<b><u>124</u></b>	44	114	126	119	121	<b><u>117</u></b>	<b><u>123</u></b>
644.nab_s	44	<b><u>76.6</u></b>	<b><u>228</u></b>	76.6	228	76.6	228	44	<b><u>76.5</u></b>	<b><u>228</u></b>	<b><u>76.6</u></b>	<b><u>228</u></b>	76.6	228
649.fotonik3d_s	44	108	84.7	<b><u>109</u></b>	<b><u>84.0</u></b>	109	83.9	44	111	82.3	<b><u>108</u></b>	<b><u>84.2</u></b>	108	84.6
654.roms_s	44	116	136	<b><u>115</u></b>	<b><u>137</u></b>	115	137	44	114	138	<b><u>115</u></b>	<b><u>137</u></b>	115	137
SPECSpeed®2017_fp_base = 134							SPECSpeed®2017_fp_peak = 135							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact"

LD\_LIBRARY\_PATH = "/home/cpu2017/lib/intel64"

OMP\_STACKSIZE = "192M"

## General Notes

Binaries compiled on a system with 1x Intel Core i9-7900X CPU + 32GB RAM memory using Redhat Enterprise Linux 7.5

Transparent Huge Pages enabled by default

Prior to runcpu invocation

Filesystem page cache synced and cleared with:

```
sync; echo 3> /proc/sys/vm/drop_caches
```

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6238,  
2.10GHz)

**SPECSpeed®2017\_fp\_base = 134**

**SPECSpeed®2017\_fp\_peak = 135**

**CPU2017 License:** 9019

**Test Date:** Oct-2019

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Apr-2019

**Tested by:** Cisco Systems

**Software Availability:** May-2019

## Platform Notes

### BIOS Settings:

Intel HyperThreading Technology set to Disabled  
CPU performance set to Enterprise  
Power Performance Tuning set to OS Controls  
SNC set to Disabled  
Patrol Scrub set to Disabled

```
Sysinfo program /home/cpu2017/bin/sysinfo
Rev: r6365 of 2019-08-21 295195f888a3d7edb1e6e46a485a0011
running on linux-jm4k Mon Oct 28 05:27:42 2019
```

SUT (System Under Test) info as seen by some common utilities.  
For more information on this section, see  
<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) Gold 6238 CPU @ 2.10GHz
        2 "physical id"s (chips)
        44 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The following
excerpts from /proc/cpuinfo might not be reliable. Use with caution.)
cpu cores : 22
siblings : 22
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 16 17 18 19 20 21 24 25 26 27 28
```

```
From lscpu:
Architecture:           x86_64
CPU op-mode(s):         32-bit, 64-bit
Byte Order:             Little Endian
CPU(s):                 44
On-line CPU(s) list:   0-43
Thread(s) per core:    1
Core(s) per socket:    22
Socket(s):              2
NUMA node(s):           2
Vendor ID:              GenuineIntel
CPU family:             6
Model:                  85
Model name:             Intel(R) Xeon(R) Gold 6238 CPU @ 2.10GHz
Stepping:                7
CPU MHz:                2100.000
CPU max MHz:            3700.0000
CPU min MHz:            1000.0000
BogoMIPS:                4200.00
Virtualization:          VT-x
L1d cache:               32K
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6238,  
2.10GHz)

**SPECspeed®2017\_fp\_base = 134**

**SPECspeed®2017\_fp\_peak = 135**

**CPU2017 License:** 9019

**Test Date:** Oct-2019

**Test Sponsor:** Cisco Systems

**Hardware Availability:** Apr-2019

**Tested by:** Cisco Systems

**Software Availability:** May-2019

## Platform Notes (Continued)

L1i cache: 32K  
L2 cache: 1024K  
L3 cache: 30976K  
NUMA node0 CPU(s): 0-21  
NUMA node1 CPU(s): 22-43  
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp lm constant\_tsc art arch\_perfmon pebs bts rep\_good nopl xtopology nonstop\_tsc cpuid aperfmpf perf tsc\_known\_freq pni pclmulqdq dtes64 monitor ds\_cpl vmx smx est tm2 ssse3 sdbg fma cx16 xtpr pdcm pcid dca sse4\_1 sse4\_2 x2apic movbe popcnt tsc\_deadline\_timer aes xsave avx f16c rdrand lahf\_lm abm 3dnowprefetch cpuid\_fault epb cat\_13 cdp\_13 invpcid\_single intel\_ppin mba tpr\_shadow vnmi flexpriority ept vpid fsgsbase tsc\_adjust bmi1 hle avx2 smep bmi2 erms invpcid rtm cqm mpx rdt\_a avx512f avx512dq rdseed adx smap clflushopt clwb intel\_pt avx512cd avx512bw avx512vl xsaveopt xsavec xgetbv1 xsaves cqm\_llc cqm\_occup\_llc cqm\_mbm\_total cqm\_mbm\_local ibpb ibrs stibp dtherm ida arat pln pts hwp hwp\_act\_window hwp\_epp hwp\_pkg\_req pku ospke avx512\_vnni arch\_capabilities ssbd

/proc/cpuinfo cache data  
cache size : 30976 KB

From numactl --hardware    WARNING: a numactl 'node' might or might not correspond to a physical chip.  
available: 2 nodes (0-1)  
node 0 cpus: 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21  
node 0 size: 385608 MB  
node 0 free: 383857 MB  
node 1 cpus: 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43  
node 1 size: 387059 MB  
node 1 free: 380673 MB  
node distances:  
node 0 1  
0: 10 21  
1: 21 10

From /proc/meminfo  
MemTotal: 791212408 kB  
HugePages\_Total: 0  
Hugepagesize: 2048 kB

From /etc/\*release\* /etc/\*version\*  
os-release:  
NAME="SLES"  
VERSION="15"  
VERSION\_ID="15"  
PRETTY\_NAME="SUSE Linux Enterprise Server 15"  
ID="sles"

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6238,  
2.10GHz)

SPECSpeed®2017\_fp\_base = 134

SPECSpeed®2017\_fp\_peak = 135

CPU2017 License: 9019

Test Date: Oct-2019

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2019

Tested by: Cisco Systems

Software Availability: May-2019

## Platform Notes (Continued)

```
ID_LIKE="suse"  
ANSI_COLOR="0;32"  
CPE_NAME="cpe:/o:suse:sles:15"
```

uname -a:

```
Linux linux-jm4k 4.12.14-23-default #1 SMP Tue May 29 21:04:44 UTC 2018 (cd0437b)  
x86_64 x86_64 x86_64 GNU/Linux
```

Kernel self-reported vulnerability status:

CVE-2018-3620 (L1 Terminal Fault):	No status reported
Microarchitectural Data Sampling:	No status reported
CVE-2017-5754 (Meltdown):	Not affected
CVE-2018-3639 (Speculative Store Bypass):	Mitigation: Speculative Store Bypass disabled via prctl and seccomp
CVE-2017-5753 (Spectre variant 1):	Mitigation: __user pointer sanitization
CVE-2017-5715 (Spectre variant 2):	Mitigation: Indirect Branch Restricted Speculation, IBPB, IBRS_FW

run-level 3 Oct 28 00:46

SPEC is set to: /home/cpu2017

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdb1	xfs	224G	46G	179G	21%	/

From /sys/devices/virtual/dmi/id

```
BIOS: Cisco Systems, Inc. C220M5.4.0.4g.0.0712190011 07/12/2019  
Vendor: Cisco Systems Inc  
Product: UCSC-C220-M5SX  
Serial: WZP21500B9E
```

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

```
24x 0xCE00 M393A4K40CB2-CVF 32 GB 2 rank 2933, configured at 2934
```

(End of data from sysinfo program)

## Compiler Version Notes

```
=====  
C | 619.lbm_s(base, peak) 638.imagick_s(base, peak)  
| 644.nab_s(base, peak)  
=====
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6238,  
2.10GHz)

SPECSpeed®2017\_fp\_base = 134

SPECSpeed®2017\_fp\_peak = 135

CPU2017 License: 9019

Test Date: Oct-2019

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2019

Tested by: Cisco Systems

Software Availability: May-2019

## Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
C++, C, Fortran | 607.cactuBSSN\_s(base, peak)

Intel(R) C++ Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
Fortran | 603.bwaves\_s(base, peak) 649.fotonik3d\_s(base, peak)  
| 654.roms\_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

=====  
Fortran, C | 621.wrf\_s(base, peak) 627.cam4\_s(base, peak)  
| 628.pop2\_s(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler for applications running on Intel(R)  
64, Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

Intel(R) C Intel(R) 64 Compiler for applications running on Intel(R) 64,  
Version 19.0.4.227 Build 20190416

Copyright (C) 1985-2019 Intel Corporation. All rights reserved.

## Base Compiler Invocation

C benchmarks:

icc -m64 -std=c11

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6238,  
2.10GHz)

SPECSpeed®2017\_fp\_base = 134

SPECSpeed®2017\_fp\_peak = 135

CPU2017 License: 9019

Test Date: Oct-2019

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2019

Tested by: Cisco Systems

Software Availability: May-2019

## Base Compiler Invocation (Continued)

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
ifort -m64 icc -m64 -std=c11
```

Benchmarks using Fortran, C, and C++:

```
icpc -m64 icc -m64 -std=c11 ifort -m64
```

## Base Portability Flags

```
603.bwaves_s: -DSPEC_LP64
607.cactuBSSN_s: -DSPEC_LP64
619.lbm_s: -DSPEC_LP64
621.wrf_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
627.cam4_s: -DSPEC_LP64 -DSPEC_CASE_FLAG
628.pop2_s: -DSPEC_LP64 -DSPEC_CASE_FLAG -convert big_endian
-assume byterecl
638.imagick_s: -DSPEC_LP64
644.nab_s: -DSPEC_LP64
649.fotonik3d_s: -DSPEC_LP64
654.roms_s: -DSPEC_LP64
```

## Base Optimization Flags

C benchmarks:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

Fortran benchmarks:

```
-DSPEC_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp
-nostandard-realloc-lhs
```

Benchmarks using both Fortran and C:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
-nostandard-realloc-lhs
```

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP
```

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6238,  
2.10GHz)

**SPECSPEED®2017\_fp\_base = 134**

**SPECSPEED®2017\_fp\_peak = 135**

**CPU2017 License:** 9019

**Test Sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test Date:** Oct-2019

**Hardware Availability:** Apr-2019

**Software Availability:** May-2019

## Base Optimization Flags (Continued)

Benchmarks using Fortran, C, and C++ (continued):

-nostandard-realloc-lhs

## Peak Compiler Invocation

C benchmarks:

icc -m64 -std=c11

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

ifort -m64 icc -m64 -std=c11

Benchmarks using Fortran, C, and C++:

icpc -m64 icc -m64 -std=c11 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC\_OPENMP

Fortran benchmarks:

603.bwaves\_s: -prof-gen(pass 1) -prof-use(pass 2) -DSPEC\_SUPPRESS\_OPENMP  
-DSPEC\_OPENMP -O2 -xCORE-AVX512 -qopt-prefetch -ipo -O3  
-ffinite-math-only -no-prec-div -qopt-mem-layout-trans=4  
-qopenmp -nostandard-realloc-lhs

649.fotonik3d\_s: Same as 603.bwaves\_s

654.roms\_s: -DSPEC\_OPENMP -xCORE-AVX512 -ipo -O3 -no-prec-div  
-qopt-prefetch -ffinite-math-only -qopt-mem-layout-trans=4  
-qopenmp -nostandard-realloc-lhs

(Continued on next page)



# SPEC CPU®2017 Floating Point Speed Result

Copyright 2017-2020 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M5 (Intel Xeon Gold 6238,  
2.10GHz)

SPECSpeed®2017\_fp\_base = 134

SPECSpeed®2017\_fp\_peak = 135

CPU2017 License: 9019

Test Date: Oct-2019

Test Sponsor: Cisco Systems

Hardware Availability: Apr-2019

Tested by: Cisco Systems

Software Availability: May-2019

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
621.wrf_s: -prof-gen(pass 1) -prof-use(pass 2) -O2 -xCORE-AVX512  
-qopt-prefetch -ipo -O3 -ffinite-math-only -no-prec-div  
-qopt-mem-layout-trans=4 -DSPEC_SUPPRESS_OPENMP -qopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs
```

```
627.cam4_s: -xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp  
-DSPEC_OPENMP -nostandard-realloc-lhs
```

628.pop2\_s: Same as 621.wrf\_s

Benchmarks using Fortran, C, and C++:

```
-xCORE-AVX512 -ipo -O3 -no-prec-div -qopt-prefetch  
-ffinite-math-only -qopt-mem-layout-trans=4 -qopenmp -DSPEC_OPENMP  
-nostandard-realloc-lhs
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.html>  
<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revJ.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/Intel-ic19.0ul-official-linux64.2019-07-09.xml>  
<http://www.spec.org/cpu2017/flags/Cisco-Platform-Settings-V1.2-revJ.xml>

SPEC CPU and SPECSpeed are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.0 on 2019-10-27 19:57:41-0400.

Report generated on 2020-07-23 15:39:37 by CPU2017 PDF formatter v6255.

Originally published on 2019-11-25.