



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 160

PowerEdge XR11 (Intel Xeon Gold 5318N, 2.10 GHz)

SPECrate®2017_int_peak = 166

CPU2017 License: 55


Test Date: May-2021

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2021

Tested by: Dell Inc.

Software Availability: Feb-2021

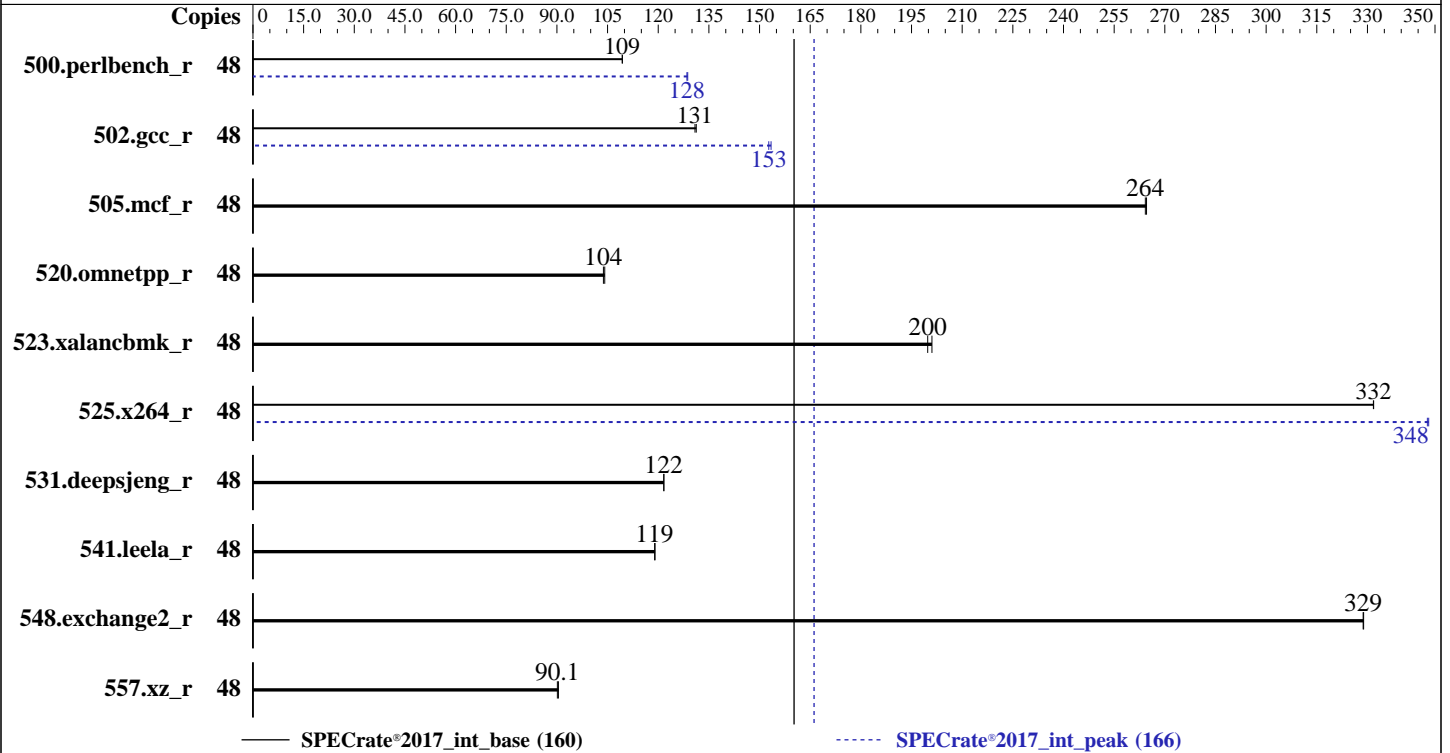

Hardware

CPU Name: Intel Xeon Gold 5318N
 Max MHz: 3400
 Nominal: 2100
 Enabled: 24 cores, 1 chip, 2 threads/core
 Orderable: 1 chip
 Cache L1: 32 KB I + 48 KB D on chip per core
 L2: 1.25 MB I+D on chip per core
 L3: 36 MB I+D on chip per chip
 Other: None
 Memory: 512 GB (8 x 64 GB 2Rx4 PC4-3200AA-R, running at 2666)
 Storage: 225 GB on tmpfs
 Other: None

Software

OS: Red Hat Enterprise Linux 8.3 (Ootpa)
 4.18.0-240.15.1.el8_3.x86_64
 Compiler: C/C++: Version 2021.1 of Intel oneAPI DPC++/C++
 Compiler Build 20201113 for Linux;
 Fortran: Version 2021.1 of Intel Fortran Compiler
 Classic Build 20201112 for Linux;
 C/C++: Version 2021.1 of Intel C/C++ Compiler
 Classic Build 20201112 for Linux
 Parallel: No
 Firmware: Version 0.6.3 released May-2021
 File System: tmpfs
 System State: Run level 5 (graphical multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other: jemalloc memory allocator V5.0.1
 Power Management: BIOS and OS set to prefer performance
 at the cost of additional power usage.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 160

PowerEdge XR11 (Intel Xeon Gold 5318N, 2.10 GHz)

SPECrate®2017_int_peak = 166

CPU2017 License: 55

Test Date: May-2021

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2021

Tested by: Dell Inc.

Software Availability: Feb-2021

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	48	699	109	699	109			48	595	128	594	129		
502.gcc_r	48	518	131	519	131			48	445	153	443	153		
505.mcf_r	48	294	264	293	265			48	294	264	293	265		
520.omnetpp_r	48	605	104	607	104			48	605	104	607	104		
523.xalancbmk_r	48	254	200	252	201			48	254	200	252	201		
525.x264_r	48	253	332	253	332			48	241	348	242	348		
531.deepsjeng_r	48	452	122	452	122			48	452	122	452	122		
541.leela_r	48	668	119	668	119			48	668	119	668	119		
548.exchange2_r	48	383	329	382	329			48	383	329	382	329		
557.xz_r	48	573	90.4	575	90.1			48	573	90.4	575	90.1		

SPECrate®2017_int_base = 160

SPECrate®2017_int_peak = 166

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/mnt/ramdisk/cpu2017-1.1.5-ic2021.1/lib/intel64:/mnt/ramdisk/cpu2017-1.
    1.5-ic2021.1/lib/ia32:/mnt/ramdisk/cpu2017-1.1.5-ic2021.1/je5.0.1-32"
MALLOCONF = "retain:true"
```

General Notes

Binaries compiled on a system with 1x Intel Core i9-7980XE CPU + 64GB RAM
 memory using Red Hat Enterprise Linux 8.1
 Transparent Huge Pages enabled by default
 Prior to runcpu invocation
 Filesystem page cache synced and cleared with:
 sync; echo 3> /proc/sys/vm/drop_caches
 runcpu command invoked through numactl i.e.:

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 160

PowerEdge XR11 (Intel Xeon Gold 5318N, 2.10 GHz)

SPECrate®2017_int_peak = 166

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jul-2021

Software Availability: Feb-2021

General Notes (Continued)

numactl --interleave=all runcpu <etc>
jemalloc, a general purpose malloc implementation
built with the RedHat Enterprise 7.5, and the system compiler gcc 4.8.5
sources available from jemalloc.net or <https://github.com/jemalloc/jemalloc/releases>

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.
Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Benchmark run from a 225 GB ramdisk created with the cmd: "mount -t tmpfs -o size=225G tmpfs /mnt/ramdisk"

Platform Notes

BIOS Settings:

Sub NUMA Cluster : 2-Way Clustering

Virtualization Technology : Disabled

System Profile : Custom

CPU Power Management : Maximum Performance

C1E : Disabled

C States : Autonomous

Memory Patrol Scrub : Disabled

Energy Efficiency Policy : Performance

CPU Interconnect Bus Link

Power Management : Disabled

sysinfo program /mnt/ramdisk/cpu2017-1.1.5-ic2021.1/bin/sysinfo
Rev: r6538 of 2020-09-24 e8664e66d2d7080afeaa89d4b38e2f1c
running on localhost.localdomain Wed May 12 12:31:49 2021

SUT (System Under Test) info as seen by some common utilities.

For more information on this section, see

<https://www.spec.org/cpu2017/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) Gold 5318N CPU @ 2.10GHz

1 "physical id"s (chips)

48 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 24

siblings : 48

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 160

PowerEdge XR11 (Intel Xeon Gold 5318N, 2.10 GHz)

SPECrate®2017_int_peak = 166

CPU2017 License: 55
Test Sponsor: Dell Inc.
Tested by: Dell Inc.

Test Date: May-2021
Hardware Availability: Jul-2021
Software Availability: Feb-2021

Platform Notes (Continued)

physical 0: cores 0 1 10 11 12 13 14 15 16 17 18 19 20 21 22 23

From lscpu:

```
Architecture: x86_64
CPU op-mode(s): 32-bit, 64-bit
Byte Order: Little Endian
CPU(s): 48
On-line CPU(s) list: 0-47
Thread(s) per core: 2
Core(s) per socket: 24
Socket(s): 1
NUMA node(s): 2
Vendor ID: GenuineIntel
CPU family: 6
Model: 106
Model name: Intel(R) Xeon(R) Gold 5318N CPU @ 2.10GHz
Stepping: 6
CPU MHz: 2855.605
BogoMIPS: 4200.00
Virtualization: VT-x
L1d cache: 48K
L1i cache: 32K
L2 cache: 1280K
L3 cache: 36864K
```

```
NUMA node0 CPU(s):
0,2,4,6,8,10,12,14,16,18,20,22,24,26,28,30,32,34,36,38,40,42,44,46
```

```
NUMA node1 CPU(s):
1,3,5,7,9,11,13,15,17,19,21,23,25,27,29,31,33,35,37,39,41,43,45,47
```

```
Flags: fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov
pat pse36 clflush dts acpi mmx fxsr sse sse2 ss ht tm pbe syscall nx pdpe1gb rdtscp
lm constant_tsc art arch_perfmon pebs bts rep_good nopl xtopology nonstop_tsc cpuid
aperfmpperf pni pclmulqdq dtes64 monitor ds_cpl vmx smx est tm2 ssse3 sdbg fma cx16
xtpr pdcm pcid dca sse4_1 sse4_2 x2apic movbe popcnt tsc_deadline_timer aes xsave
avx f16c rdrand lahf_lm abm 3dnowprefetch cpuid_fault epb cat_l3 invpcid_single
intel_ppin ssbd mba ibrs ibpb stibp ibrs_enhanced fsgsbase tsc_adjust bmi1 hle avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap avx512ifma
clflushopt clwb intel_pt avx512cd sha_ni avx512bw avx512vl xsaveopt xsavec xgetbv1
xsaves cqm_llc cqm_occup_llc cqm_mbm_total cqm_mbm_local split_lock_detect wbnoinvd
dtherm ida arat pln pts avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg tme avx512_vpopcntdq la57 rdpid md_clear pconfig flush_l1d
arch_capabilities
```

```
/proc/cpuinfo cache data
cache size : 36864 KB
```

From numactl --hardware WARNING: a numactl 'node' might or might not correspond to a physical chip.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 160

PowerEdge XR11 (Intel Xeon Gold 5318N, 2.10 GHz)

SPECrate®2017_int_peak = 166

CPU2017 License: 55

Test Date: May-2021

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2021

Tested by: Dell Inc.

Software Availability: Feb-2021

Platform Notes (Continued)

```

available: 2 nodes (0-1)
node 0 cpus: 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46
node 0 size: 249861 MB
node 0 free: 241874 MB
node 1 cpus: 1 3 5 7 9 11 13 15 17 19 21 23 25 27 29 31 33 35 37 39 41 43 45 47
node 1 size: 250003 MB
node 1 free: 256389 MB
node distances:
node  0  1
  0:  10  11
  1:  11  10

From /proc/meminfo
MemTotal:          527811720 kB
HugePages_Total:      0
Hugepagesize:       2048 kB

/sbin/tuned-adm active
Current active profile: throughput-performance

From /etc/*release* /etc/*version*
os-release:
NAME="Red Hat Enterprise Linux"
VERSION="8.3 (Ootpa)"
ID="rhel"
ID_LIKE="fedora"
VERSION_ID="8.3"
PLATFORM_ID="platform:el8"
PRETTY_NAME="Red Hat Enterprise Linux 8.3 (Ootpa)"
ANSI_COLOR="0;31"
redhat-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release: Red Hat Enterprise Linux release 8.3 (Ootpa)
system-release-cpe: cpe:/o:redhat:enterprise_linux:8.3:ga

uname -a:
Linux localhost.localdomain 4.18.0-240.15.1.el8_3.x86_64 #1 SMP Wed Feb 3 03:12:15 EST
2021 x86_64 x86_64 x86_64 GNU/Linux

Kernel self-reported vulnerability status:

CVE-2018-12207 (iTLB Multihit):          Not affected
CVE-2018-3620 (L1 Terminal Fault):       Not affected
Microarchitectural Data Sampling:       Not affected
CVE-2017-5754 (Meltdown):               Not affected
CVE-2018-3639 (Speculative Store Bypass): Mitigation: Speculative Store
Bypass disabled via prctl and
seccomp

```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 160

PowerEdge XR11 (Intel Xeon Gold 5318N, 2.10 GHz)

SPECrate®2017_int_peak = 166

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jul-2021

Software Availability: Feb-2021

Platform Notes (Continued)

CVE-2017-5753 (Spectre variant 1): Mitigation: usercopy/swapgs barriers and __user pointer sanitization

CVE-2017-5715 (Spectre variant 2): Mitigation: Enhanced IBRS, IBPB: conditional, RSB filling

CVE-2020-0543 (Special Register Buffer Data Sampling): Not affected

CVE-2019-11135 (TSX Asynchronous Abort): Not affected

run-level 5 May 12 12:26

SPEC is set to: /mnt/ramdisk/cpu2017-1.1.5-ic2021.1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
tmpfs	tmpfs	225G	6.9G	219G	4%	/mnt/ramdisk

From /sys/devices/virtual/dmi/id

Vendor: Dell Inc.

Product: PowerEdge XR11

Product Family: PowerEdge

Serial: 09A000N

Additional information from dmidecode follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

2x 002C0632002C 36ASF8G72PZ-3G2B2 64 GB 2 rank 3200, configured at 2666

3x 002C069D002C 36ASF8G72PZ-3G2B2 64 GB 2 rank 3200, configured at 2666

1x 00AD063200AD HMAA8GR7AJR4N-XN 64 GB 2 rank 3200, configured at 2666

2x 00CE063200CE M393A8G40AB2-CWE 64 GB 2 rank 3200, configured at 2666

BIOS:

BIOS Vendor: Dell Inc.

BIOS Version: 0.6.3

BIOS Date: 05/04/2020

BIOS Revision: 0.6

(End of data from sysinfo program)

BIOS Note: Version 0.6.3 was built with an incorrect date stamp which is reflected in the sysinfo section. The correct release date is reflected in the "Firmware" field of the disclosure.

Compiler Version Notes

```
=====
C      | 500.perlbench_r(peak)
=====
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 160

PowerEdge XR11 (Intel Xeon Gold 5318N, 2.10 GHz)

SPECrate®2017_int_peak = 166

CPU2017 License: 55

Test Date: May-2021

Test Sponsor: Dell Inc.

Hardware Availability: Jul-2021

Tested by: Dell Inc.

Software Availability: Feb-2021

Compiler Version Notes (Continued)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
| 525.x264_r(base, peak) 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 160

PowerEdge XR11 (Intel Xeon Gold 5318N, 2.10 GHz)

SPECrate®2017_int_peak = 166

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jul-2021

Software Availability: Feb-2021

Compiler Version Notes (Continued)

=====
C | 500.perlbench_r(peak)

Intel(R) C Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 502.gcc_r(peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on IA-32, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C | 500.perlbench_r(base) 502.gcc_r(base) 505.mcf_r(base, peak)
525.x264_r(base, peak) 557.xz_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
C++ | 520.omnetpp_r(base, peak) 523.xalanbmk_r(base, peak)
531.deepsjeng_r(base, peak) 541.leela_r(base, peak)

Intel(R) oneAPI DPC++/C++ Compiler for applications running on Intel(R) 64, Version 2021.1 Build 20201113
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

=====
Fortran | 548.exchange2_r(base, peak)

Intel(R) Fortran Intel(R) 64 Compiler Classic for applications running on Intel(R) 64, Version 2021.1 Build 20201112_000000
Copyright (C) 1985-2020 Intel Corporation. All rights reserved.

Base Compiler Invocation

C benchmarks:
icx

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 160

PowerEdge XR11 (Intel Xeon Gold 5318N, 2.10 GHz)

SPECrate®2017_int_peak = 166

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jul-2021

Software Availability: Feb-2021

Base Compiler Invocation (Continued)

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Base Portability Flags

```
500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

Base Optimization Flags

C benchmarks:

```
-w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math
-flto -mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

C++ benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ffast-math -flto
-mfpmath=sse -funroll-loops -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmalloc
```

Fortran benchmarks:

```
-w -m64 -Wl,-z,muldefs -xCORE-AVX512 -O3 -ipo -no-prec-div
-qopt-mem-layout-trans=4 -nostandard-realloc-lhs -align array32byte
-auto -mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 160

PowerEdge XR11 (Intel Xeon Gold 5318N, 2.10 GHz)

SPECrate®2017_int_peak = 166

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jul-2021

Software Availability: Feb-2021

Base Optimization Flags (Continued)

Fortran benchmarks (continued):

-lqkmalloc

Peak Compiler Invocation

C benchmarks (except as noted below):

icx

500.perlbench_r: icc

C++ benchmarks:

icpx

Fortran benchmarks:

ifort

Peak Portability Flags

500.perlbench_r: -DSPEC_LP64 -DSPEC_LINUX_X64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LP64 -DSPEC_LINUX

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: -w1, -z, muldefs -prof-gen(pass 1) -prof-use(pass 2)

-xCORE-AVX512 -ipo -O3 -no-prec-div

-qopt-mem-layout-trans=4 -fno-strict-overflow

-mbranches-within-32B-boundaries

-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin

-lqkmalloc

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate®2017_int_base = 160

PowerEdge XR11 (Intel Xeon Gold 5318N, 2.10 GHz)

SPECrate®2017_int_peak = 166

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jul-2021

Software Availability: Feb-2021

Peak Optimization Flags (Continued)

```
502.gcc_r: -m32
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/ia32_lin
-std=gnu89 -Wl,-z,muldefs -fprofile-generate(pass 1)
-fprofile-use=default.profddata(pass 2) -xCORE-AVX512 -flto
-Ofast(pass 1) -O3 -ffast-math -qopt-mem-layout-trans=4
-mbranches-within-32B-boundaries
-L/usr/local/jemalloc32-5.0.1/lib -ljemalloc
```

505.mcf_r: basepeak = yes

```
525.x264_r: -w -std=c11 -m64 -Wl,-z,muldefs -xCORE-AVX512 -flto
-O3 -ffast-math -qopt-mem-layout-trans=4 -fno-alias
-mbranches-within-32B-boundaries
-L/opt/intel/oneapi/compiler/2021.1.1/linux/compiler/lib/intel64_lin
-lqkmallocc
```

557.xz_r: basepeak = yes

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: basepeak = yes

531.deepsjeng_r: basepeak = yes

541.leela_r: basepeak = yes

Fortran benchmarks:

548.exchange2_r: basepeak = yes

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.html

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.1.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2017/flags/Intel-ic2021-official-linux64_revA.xml

<http://www.spec.org/cpu2017/flags/Dell-Platform-Flags-PowerEdge-Intel-ICX-rev1.1.xml>



SPEC CPU[®]2017 Integer Rate Result

Copyright 2017-2021 Standard Performance Evaluation Corporation

Dell Inc.

SPECrate[®]2017_int_base = 160

PowerEdge XR11 (Intel Xeon Gold 5318N, 2.10 GHz)

SPECrate[®]2017_int_peak = 166

CPU2017 License: 55

Test Sponsor: Dell Inc.

Tested by: Dell Inc.

Test Date: May-2021

Hardware Availability: Jul-2021

Software Availability: Feb-2021

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU[®]2017 v1.1.5 on 2021-05-12 13:31:49-0400.

Report generated on 2021-07-08 13:40:44 by CPU2017 PDF formatter v6442.

Originally published on 2021-07-06.