



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U  
(2.25 GHz, AMD EPYC 9965)

SPECrate®2017\_int\_base = 3230

SPECrate®2017\_int\_peak = 3380

CPU2017 License: 9016


Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

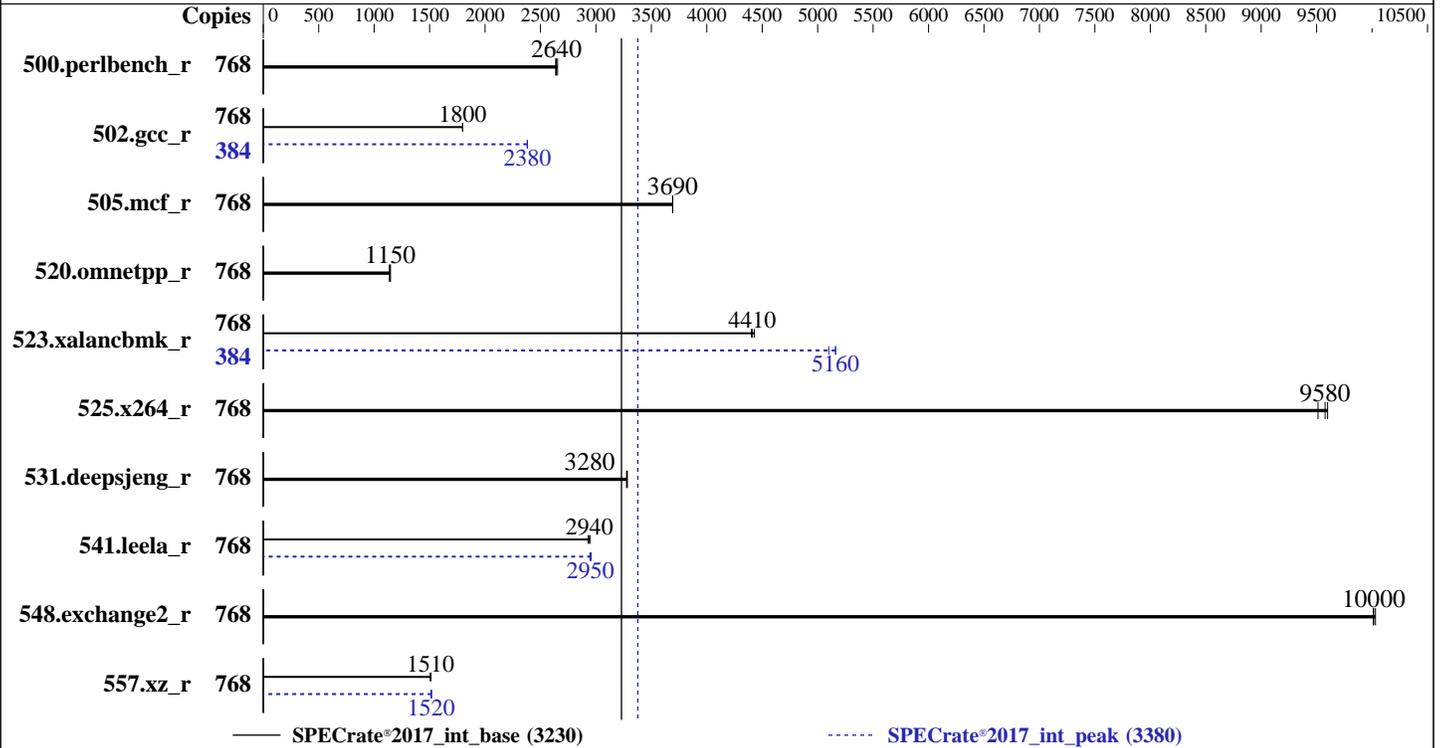

### Hardware

CPU Name: AMD EPYC 9965  
 Max MHz: 3700  
 Nominal: 2250  
 Enabled: 384 cores, 2 chips, 2 threads/core  
 Orderable: 1,2 chips  
 Cache L1: 32 KB I + 48 KB D on chip per core  
 L2: 1 MB I+D on chip per core  
 L3: 384 MB I+D on chip per chip,  
 32 MB shared / 16 cores  
 Other: None  
 Memory: 1536 GB (24 x 64 GB 2Rx4 PC5-6400B-R)  
 Storage: 1 x 4.0 TB PCIe NVMe SSD  
 Other: CPU Cooling: Air

### Software

OS: SUSE Linux Enterprise Server 15 SP6 (x86\_64)  
 Kernel 6.4.0-150600.21-default  
 Compiler: C/C++/Fortran: Version 5.0.0 of AOCC  
 Parallel: No  
 Firmware: Version 0502 released Feb-2025  
 File System: xfs  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other: None  
 Power Management: BIOS and OS set to prefer performance at the cost of additional power usage.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U  
(2.25 GHz, AMD EPYC 9965)

SPECrate®2017\_int\_base = 3230

SPECrate®2017\_int\_peak = 3380

**CPU2017 License:** 9016  
**Test Sponsor:** ASUSTeK Computer Inc.  
**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2025  
**Hardware Availability:** Mar-2025  
**Software Availability:** Oct-2024

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	768	461	2650	<b><u>463</u></b>	<b><u>2640</u></b>	464	2640	768	461	2650	<b><u>463</u></b>	<b><u>2640</u></b>	464	2640
502.gcc_r	768	605	1800	<b><u>605</u></b>	<b><u>1800</u></b>	605	1800	384	228	2380	228	2380	<b><u>228</u></b>	<b><u>2380</u></b>
505.mcf_r	768	336	3690	336	3690	<b><u>336</u></b>	<b><u>3690</u></b>	768	336	3690	336	3690	<b><u>336</u></b>	<b><u>3690</u></b>
520.omnetpp_r	768	<b><u>880</u></b>	<b><u>1150</u></b>	879	1150	886	1140	768	<b><u>880</u></b>	<b><u>1150</u></b>	879	1150	886	1140
523.xalancbmk_r	768	<b><u>184</u></b>	<b><u>4410</u></b>	183	4430	184	4400	384	78.6	5160	79.5	5100	<b><u>78.6</u></b>	<b><u>5160</u></b>
525.x264_r	768	<b><u>140</u></b>	<b><u>9580</u></b>	140	9600	141	9510	768	<b><u>140</u></b>	<b><u>9580</u></b>	140	9600	141	9510
531.deepsjeng_r	768	268	3280	269	3280	<b><u>268</u></b>	<b><u>3280</u></b>	768	268	3280	269	3280	<b><u>268</u></b>	<b><u>3280</u></b>
541.leela_r	768	432	2950	<b><u>432</u></b>	<b><u>2940</u></b>	434	2930	768	432	2950	430	2960	<b><u>431</u></b>	<b><u>2950</u></b>
548.exchange2_r	768	<b><u>201</u></b>	<b><u>10000</u></b>	201	10000	201	10000	768	<b><u>201</u></b>	<b><u>10000</u></b>	201	10000	201	10000
557.xz_r	768	551	1510	548	1510	<b><u>550</u></b>	<b><u>1510</u></b>	768	547	1520	548	1510	<b><u>547</u></b>	<b><u>1520</u></b>

SPECrate®2017\_int\_base = **3230**

SPECrate®2017\_int\_peak = **3380**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Notes

The AMD64 AOCC Compiler Suite is available at  
<http://developer.amd.com/amd-aocc/>

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit  
'ulimit -l 2097152' was used to set environment locked pages in memory limit  
OS set to performance mode via cpupower frequency-set -g performance  
runcpu command invoked through numactl i.e.:  
numactl --interleave=all runcpu <etc>  
To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty\_ratio=8' run as root.  
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.  
To free node-local memory and avoid remote memory usage,  
'sysctl -w vm.zone\_reclaim\_mode=1' run as root.  
To clear filesystem caches, 'sync; sysctl -w vm.drop\_caches=3' run as root.  
To disable address space layout randomization (ASLR) to reduce run-to-run  
variability, 'sysctl -w kernel.randomize\_va\_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations,  
'echo always > /sys/kernel/mm/transparent\_hugepage/enabled' and  
'echo always > /sys/kernel/mm/transparent\_hugepage/defrag' run as root.



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U  
(2.25 GHz, AMD EPYC 9965)

SPECrate®2017\_int\_base = 3230

SPECrate®2017\_int\_peak = 3380

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Oct-2024

## Environment Variables Notes

Environment variables set by runcpu before the start of the run:

```
LD_LIBRARY_PATH =
    "/aocc500A1/amd_rate_aocc500_znver5_A_lib/lib:/aocc500A1/amd_rate_aocc500_znver5_A_lib/lib32:"
MALLOC_CONF = "retain:true"
```

Environment variables set by runcpu during the 523.xalancbmk\_r peak run:

```
MALLOC_CONF = "thp:always"
```

## General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

## Platform Notes

BIOS Configuration:

```
SR-IOV Support = Disabled
SVM Mode = Disabled
L1 Stride Prefetcher = Disabled
NUMA nodes per socket = NPS4
Determinism Control = Manual
DRAM Scrub time = Disabled
Engine Boost = Aggressive
TDP Control = Manual
TDP = 500
PPT Control = Manual
PPT = 500
BMC Configuration:
Fan mode = Full speed mode
```

```
Sysinfo program /aocc500A1/bin/sysinfo
Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197
running on localhost Fri Feb 21 09:31:11 2025
```

SUT (System Under Test) info as seen by some common utilities.

-----  
Table of contents  
-----

1. uname -a
2. w
3. Username
4. ulimit -a
5. sysinfo process ancestry
6. /proc/cpuinfo
7. lscpu
8. numactl --hardware
9. /proc/meminfo
10. who -r
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U  
(2.25 GHz, AMD EPYC 9965)

SPECrate®2017\_int\_base = 3230

SPECrate®2017\_int\_peak = 3380

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

### Platform Notes (Continued)

- 12. Services, from systemctl list-unit-files
- 13. Linux kernel boot-time arguments, from /proc/cmdline
- 14. cpupower frequency-info
- 15. tuned-adm active
- 16. sysctl
- 17. /sys/kernel/mm/transparent\_hugepage
- 18. /sys/kernel/mm/transparent\_hugepage/khugepaged
- 19. OS release
- 20. Disk information
- 21. /sys/devices/virtual/dmi/id
- 22. dmidecode
- 23. BIOS

```
1. uname -a
Linux localhost 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024 (36cle09)
x86_64 x86_64 x86_64 GNU/Linux
```

```
2. w
09:31:11 up 2 min, 1 user, load average: 0.80, 0.40, 0.15
USER      TTY      FROM          LOGIN@   IDLE   JCPU   PCPU WHAT
root      tty1     -             09:29   46.00s 1.21s  0.22s /bin/bash ./amd_rate_aocc500_znver5_A1.sh
```

```
3. Username
From environment variable $USER: root
```

```
4. ulimit -a
core file size          (blocks, -c) unlimited
data seg size           (kbytes, -d) unlimited
scheduling priority     (-e) 0
file size                (blocks, -f) unlimited
pending signals         (-i) 6187565
max locked memory       (kbytes, -l) 2097152
max memory size         (kbytes, -m) unlimited
open files              (-n) 1024
pipe size                (512 bytes, -p) 8
POSIX message queues    (bytes, -q) 819200
real-time priority      (-r) 0
stack size              (kbytes, -s) unlimited
cpu time                (seconds, -t) unlimited
max user processes      (-u) 6187565
virtual memory          (kbytes, -v) unlimited
file locks              (-x) unlimited
```

```
5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
login -- root
-bash
python3 ./run_amd_rate_aocc500_znver5_A1.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
$SPEC/tmp/CPU2017.548/templogs/preenv.intrate.548.0.log --lognum 548.0 --from_runcpu 2
specperl $SPEC/bin/sysinfo
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U  
(2.25 GHz, AMD EPYC 9965)

SPECrate®2017\_int\_base = 3230

SPECrate®2017\_int\_peak = 3380

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

### Platform Notes (Continued)

\$SPEC = /aocc500A1

6. /proc/cpuinfo

```

model name      : AMD EPYC 9965 192-Core Processor
vendor_id      : AuthenticAMD
cpu family     : 26
model          : 17
stepping       : 0
microcode      : 0xb101028
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size      : 192 4K pages
cpu cores     : 192
siblings      : 384
2 physical ids (chips)
768 processors (hardware threads)
physical id 0: core ids 0-191
physical id 1: core ids 0-191
physical id 0: apicids 0-383
physical id 1: apicids 512-895

```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```

Architecture:          x86_64
CPU op-mode(s):        32-bit, 64-bit
Address sizes:         52 bits physical, 57 bits virtual
Byte Order:            Little Endian
CPU(s):                768
On-line CPU(s) list:   0-767
Vendor ID:             AuthenticAMD
BIOS Vendor ID:       Advanced Micro Devices, Inc.
Model name:            AMD EPYC 9965 192-Core Processor
BIOS Model name:      AMD EPYC 9965 192-Core Processor
BIOS CPU family:      107
CPU family:           26
Model:                 17
Thread(s) per core:   2
Core(s) per socket:   192
Socket(s):             2
Stepping:              0
Frequency boost:      enabled
CPU(s) scaling MHz:   61%
CPU max MHz:          3700.1951
CPU min MHz:          1500.0000
BogoMIPS:             4493.02
Flags:                 fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
rdtsmp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
cmp_legacy extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpext
perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512v1 xsaveopt

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U  
(2.25 GHz, AMD EPYC 9965)

SPECrate®2017\_int\_base = 3230

SPECrate®2017\_int\_peak = 3380

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

### Platform Notes (Continued)

```

xsavc xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnni
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_lld debug_swap

```

```

L1d cache: 18 MiB (384 instances)
L1i cache: 12 MiB (384 instances)
L2 cache: 384 MiB (384 instances)
L3 cache: 768 MiB (24 instances)
NUMA node(s): 8
NUMA node0 CPU(s): 0-47,384-431
NUMA node1 CPU(s): 48-95,432-479
NUMA node2 CPU(s): 96-143,480-527
NUMA node3 CPU(s): 144-191,528-575
NUMA node4 CPU(s): 192-239,576-623
NUMA node5 CPU(s): 240-287,624-671
NUMA node6 CPU(s): 288-335,672-719
NUMA node7 CPU(s): 336-383,720-767
Vulnerability Gather data sampling: Not affected
Vulnerability Itlb multihit: Not affected
Vulnerability L1tf: Not affected
Vulnerability Mds: Not affected
Vulnerability Meltdown: Not affected
Vulnerability Mmio stale data: Not affected
Vulnerability Reg file data sampling: Not affected
Vulnerability Retbleed: Not affected
Vulnerability Spec rstack overflow: Not affected
Vulnerability Spec store bypass: Mitigation; Speculative Store Bypass disabled via prctl
Vulnerability Spectre v1: Mitigation; usercopy/swaps barriers and __user pointer sanitization
Vulnerability Spectre v2: Mitigation; Enhanced / Automatic IBRS; IBPB conditional; STIBP
always-on; RSB filling; PBRBS-eIBRS Not affected; BHI Not affected
Vulnerability Srbds: Not affected
Vulnerability Tsx async abort: Not affected

```

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	18M	12	Data	1	64	1	64
L1i	32K	12M	8	Instruction	1	64	1	64
L2	1M	384M	16	Unified	2	1024	1	64
L3	32M	768M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

```

available: 8 nodes (0-7)
node 0 cpus: 0-47,384-431
node 0 size: 192626 MB
node 0 free: 191380 MB
node 1 cpus: 48-95,432-479
node 1 size: 193510 MB
node 1 free: 192951 MB
node 2 cpus: 96-143,480-527
node 2 size: 193510 MB
node 2 free: 192906 MB
node 3 cpus: 144-191,528-575
node 3 size: 193472 MB

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U  
(2.25 GHz, AMD EPYC 9965)

SPECrate®2017\_int\_base = 3230

SPECrate®2017\_int\_peak = 3380

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

### Platform Notes (Continued)

```

node 3 free: 192855 MB
node 4 cpus: 192-239,576-623
node 4 size: 193510 MB
node 4 free: 193201 MB
node 5 cpus: 240-287,624-671
node 5 size: 193510 MB
node 5 free: 193196 MB
node 6 cpus: 288-335,672-719
node 6 size: 193510 MB
node 6 free: 193200 MB
node 7 cpus: 336-383,720-767
node 7 size: 193264 MB
node 7 free: 192919 MB
node distances:
node  0  1  2  3  4  5  6  7
  0: 10 12 12 12 32 32 32 32
  1: 12 10 12 12 32 32 32 32
  2: 12 12 10 12 32 32 32 32
  3: 12 12 12 10 32 32 32 32
  4: 32 32 32 32 10 12 12 12
  5: 32 32 32 32 12 10 12 12
  6: 32 32 32 32 12 12 10 12
  7: 32 32 32 32 12 12 12 10

```

```

-----
9. /proc/meminfo
   MemTotal:      1584043352 kB

```

```

-----
10. who -r
    run-level 3 Feb 21 09:29

```

```

-----
11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
    Default Target   Status
    multi-user       running

```

```

-----
12. Services, from systemctl list-unit-files
STATE UNIT FILES
enabled YaST2-Firstboot YaST2-Second-Stage apparmor auditd cron display-manager getty@ irqbalance
issue-generator kbdsettings klog lvm2-monitor nscd nvme-fc-boot-connections
nvmf-autoconnect postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wickd
wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny
enabled-runtime systemd-remount-fs
disabled autofsd autoyast-initscripts blk-availability boot-sysctl ca-certificates chrony-wait
chronyd console-getty cups cups-browsed debug-shell ebttables exchange-bmc-os-info
firewalld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys
kexec-load lunmask man-db-create multipathd nfs nfs-blkmap rpcbind rpmconfigcheck rsyncd
serial-getty@ smartd-generate_opts snmpd snmptrapd svnserv systemd-boot-check-no-failures
systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync
systemd-timesyncd tuned udisks2 vncserver@
indirect systemd-userdbd wickedd

```

```

-----
13. Linux kernel boot-time arguments, from /proc/cmdline
BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=bd4eeb48-8f2c-47c9-ae06-b7241b1d0eb7
splash=silent
mitigations=auto

```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U  
(2.25 GHz, AMD EPYC 9965)

SPECrate®2017\_int\_base = 3230

SPECrate®2017\_int\_peak = 3380

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

### Platform Notes (Continued)

```
quiet
security=apparmor
video=1024x768
```

-----  
14. cpupower frequency-info

```
analyzing CPU 416:
  current policy: frequency should be within 1.50 GHz and 2.25 GHz.
                  The governor "performance" may decide which speed to use
                  within this range.
  boost state support:
    Supported: yes
    Active: yes
```

-----  
15. tuned-adm active

```
It seems that tuned daemon is not running, preset profile is not activated.
Preset profile: latency-performance
```

-----  
16. sysctl

```
kernel.numa_balancing          1
kernel.randomize_va_space      0
vm.compaction_proactiveness    20
vm.dirty_background_bytes      0
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds    43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

-----  
17. /sys/kernel/mm/transparent\_hugepage

```
defrag          [always] defer+madvise madvise never
enabled         [always] madvise never
hpage_pmd_size  2097152
shmem_enabled   always within_size advise [never] deny force
```

-----  
18. /sys/kernel/mm/transparent\_hugepage/khugepaged

```
alloc_sleep_millisecs  60000
defrag                  1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
```

-----  
19. OS release

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U  
(2.25 GHz, AMD EPYC 9965)

SPECrate®2017\_int\_base = 3230

SPECrate®2017\_int\_peak = 3380

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Oct-2024

### Platform Notes (Continued)

From /etc/\*-release /etc/\*-version  
os-release SUSE Linux Enterprise Server 15 SP6

-----  
20. Disk information

SPEC is set to: /aocc500A1

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/nvme0n1p4	xf	2.0T	268G	1.8T	14%	/

-----  
21. /sys/devices/virtual/dmi/id

Vendor: ASUSTeK COMPUTER INC.  
Product: RS720A-E13-RS8U  
Product Family: Server  
Serial: 123456789012

-----  
22. dmidecode

Additional information from dmidecode 3.4 follows. WARNING: Use caution when you interpret this section. The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the "DMTF SMBIOS" standard.

Memory:

24x Samsung M321R8GA0EB2-CCPPC 64 GB 2 rank 6400

-----  
23. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: American Megatrends Inc.  
BIOS Version: 0502  
BIOS Date: 02/04/2025  
BIOS Revision: 5.2

### Compiler Version Notes

-----  
C | 502.gcc\_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: i386-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

-----  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

Target: x86\_64-unknown-linux-gnu

Thread model: posix

InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

-----  
C | 502.gcc\_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U  
(2.25 GHz, AMD EPYC 9965)

SPECrate®2017\_int\_base = 3230

SPECrate®2017\_int\_peak = 3380

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Oct-2024

## Compiler Version Notes (Continued)

Target: i386-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
C | 500.perlbench\_r(base, peak) 502.gcc\_r(base) 505.mcf\_r(base, peak) 525.x264\_r(base, peak)  
| 557.xz\_r(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
C++ | 520.omnetpp\_r(base, peak) 523.xalancbmk\_r(base, peak) 531.deepsjeng\_r(base, peak)  
| 541.leela\_r(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

=====  
Fortran | 548.exchange2\_r(base, peak)  
=====

AMD clang version 17.0.6 (CLANG: AOCC\_5.0.0-Build#1316 2024\_09\_09)  
Target: x86\_64-unknown-linux-gnu  
Thread model: posix  
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

## Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Base Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64  
502.gcc\_r: -DSPEC\_LP64  
505.mcf\_r: -DSPEC\_LP64

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720A-E13-RS8U  
(2.25 GHz, AMD EPYC 9965)

SPECrate®2017\_int\_base = 3230

SPECrate®2017\_int\_peak = 3380

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Oct-2024

## Base Portability Flags (Continued)

```
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64
```

## Base Optimization Flags

### C benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang
-lamdalloc-ext -ldl
```

### C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100
-mllvm -loop-unswitch-threshold=200000
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext
-ldl
```

### Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -flto
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500
-lamdlibm -lflang -lamdalloc -ldl
```



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720A-E13-RS8U  
(2.25 GHz, AMD EPYC 9965)

SPECrate®2017\_int\_base = 3230

SPECrate®2017\_int\_peak = 3380

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Oct-2024

## Base Other Flags

C benchmarks:

-Wno-unused-command-line-argument

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

## Peak Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

## Peak Portability Flags

500.perlbench\_r: -DSPEC\_LINUX\_X64 -DSPEC\_LP64

502.gcc\_r: -D\_FILE\_OFFSET\_BITS=64

505.mcf\_r: -DSPEC\_LP64

520.omnetpp\_r: -DSPEC\_LP64

523.xalancbmk\_r: -DSPEC\_LINUX -DSPEC\_LP64

525.x264\_r: -DSPEC\_LP64

531.deepsjeng\_r: -DSPEC\_LP64

541.leela\_r: -DSPEC\_LP64

548.exchange2\_r: -DSPEC\_LP64

557.xz\_r: -DSPEC\_LP64

## Peak Optimization Flags

C benchmarks:

500.perlbench\_r: basepeak = yes

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

ASUS RS720A-E13-RS8U  
(2.25 GHz, AMD EPYC 9965)

SPECrate®2017\_int\_base = 3230

SPECrate®2017\_int\_peak = 3380

**CPU2017 License:** 9016

**Test Sponsor:** ASUSTeK Computer Inc.

**Tested by:** ASUSTeK Computer Inc.

**Test Date:** Feb-2025

**Hardware Availability:** Mar-2025

**Software Availability:** Oct-2024

## Peak Optimization Flags (Continued)

```
502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc
```

505.mcf\_r: basepeak = yes

525.x264\_r: basepeak = yes

```
557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-freemap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl
```

C++ benchmarks:

520.omnetpp\_r: basepeak = yes

```
523.xalancbmk_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl
```

531.deepsjeng\_r: basepeak = yes

```
541.leela_r: -m64 -std=c++14
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
```

(Continued on next page)



# SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

ASUS RS720A-E13-RS8U  
(2.25 GHz, AMD EPYC 9965)

SPECrate®2017\_int\_base = 3230

SPECrate®2017\_int\_peak = 3380

CPU2017 License: 9016

Test Sponsor: ASUSTeK Computer Inc.

Tested by: ASUSTeK Computer Inc.

Test Date: Feb-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

## Peak Optimization Flags (Continued)

541.leela\_r (continued):

```
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamalloc-ext -ldl
```

Fortran benchmarks:

548.exchange2\_r: basepeak = yes

## Peak Other Flags

C benchmarks (except as noted below):

```
-Wno-unused-command-line-argument
```

502.gcc\_r: -L/usr/lib32 -Wno-unused-command-line-argument

```
-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K15-V1.1.html>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/ASUSTekPlatform-Settings-AMD-K15-V1.1.xml>

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.00.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact [info@spec.org](mailto:info@spec.org).

Tested with SPEC CPU®2017 v1.1.9 on 2025-02-20 20:31:10-0500.

Report generated on 2025-04-09 14:58:14 by CPU2017 PDF formatter v6716.

Originally published on 2025-04-09.