



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1250

SPECrate®2017_int_peak = 1280

CPU2017 License: 3


Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

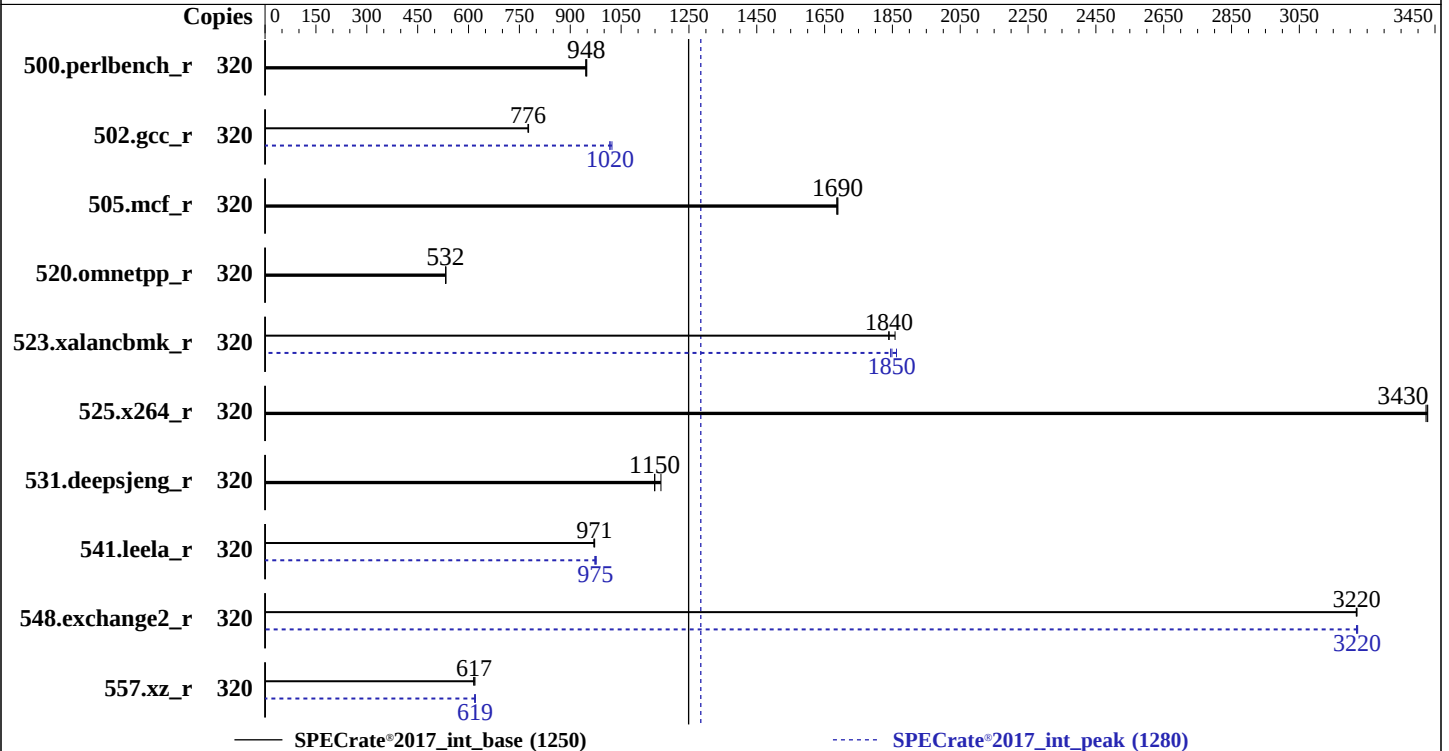

Hardware

CPU Name: AMD EPYC 9845
Max MHz: 3700
Nominal: 2100
Enabled: 160 cores, 1 chip, 2 threads/core
Orderable: 1 chip
Cache L1: 32 KB I + 48 KB D on chip per core
L2: 1 MB I+D on chip per core
L3: 320 MB I+D on chip per chip,
32 MB shared / 16 cores
Other: None
Memory: 768 GB (12 x 64 GB 2Rx4 PC5-6400B-R)
Storage: 1 x 480 GB SATA SSD
Other: CPU Cooling: CLC

Software

OS: SUSE Linux Enterprise Server 15 SP6
Kernel 6.4.0-150600.21-default
Compiler: C/C++/Fortran: Version 5.0.0 of AOCC
Parallel: No
Firmware: HPE BIOS Version v2.30 01/17/2025 released
Jan-2025
File System: xfs
System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other: None
Power Management: BIOS and OS set to prefer performance at
the cost of additional power usage



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1250

SPECrate®2017_int_peak = 1280

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
500.perlbench_r	320	538	948	537	949	539	945	320	538	948	537	949	539	945
502.gcc_r	320	583	777	584	776	584	775	320	446	1020	445	1020	443	1020
505.mcf_r	320	307	1690	306	1690	306	1690	320	307	1690	306	1690	306	1690
520.omnetpp_r	320	789	532	789	532	787	534	320	789	532	789	532	787	534
523.xalancbmk_r	320	184	1840	182	1860	184	1840	320	181	1860	183	1850	183	1840
525.x264_r	320	163	3430	164	3420	163	3430	320	163	3430	164	3420	163	3430
531.deepsjeng_r	320	319	1150	319	1150	314	1170	320	319	1150	319	1150	314	1170
541.leela_r	320	547	970	545	972	546	971	320	543	977	545	972	544	975
548.exchange2_r	320	260	3220	261	3220	260	3220	320	260	3220	260	3220	260	3220
557.xz_r	320	560	617	562	615	558	619	320	559	618	557	620	558	619

SPECrate®2017_int_base = 1250

SPECrate®2017_int_peak = 1280

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Notes

The AMD64 AOCC Compiler Suite is available at
<http://developer.amd.com/amd-aocc/>

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size limit
'ulimit -l 2097152' was used to set environment locked pages in memory limit

runcpu command invoked through numactl i.e.:
numactl --interleave=all runcpu <etc>

To limit dirty cache to 8% of memory, 'sysctl -w vm.dirty_ratio=8' run as root.
To limit swap usage to minimum necessary, 'sysctl -w vm.swappiness=1' run as root.
To free node-local memory and avoid remote memory usage,
'sysctl -w vm.zone_reclaim_mode=1' run as root.
To clear filesystem caches, 'sync; sysctl -w vm.drop_caches=3' run as root.
To disable address space layout randomization (ASLR) to reduce run-to-run
variability, 'sysctl -w kernel.randomize_va_space=0' run as root.

To enable Transparent Hugepages (THP) for all allocations:
'echo always > /sys/kernel/mm/transparent_hugepage/enabled' and
'echo always > /sys/kernel/mm/transparent_hugepage/defrag' run as root.



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1250

SPECrate®2017_int_peak = 1280

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Environment Variables Notes

Environment variables set by runcpu before the start of the run:

LD_LIBRARY_PATH =

"/home/cpu2017_new/amd_rate_aocc500_znver5_A_lib/lib:/home/cpu2017_new/amd_rate_aocc500_znver5_A_lib/lib32:"

MALLOC_CONF = "retain:true"

Environment variables set by runcpu during the 523.xalancbmk_r peak run:

MALLOC_CONF = "thp:always"

General Notes

Binaries were compiled on a system with 2x AMD EPYC 9174F CPU + 1.5TiB Memory using RHEL 8.6

NA: The test sponsor attests, as of date of publication, that CVE-2017-5754 (Meltdown) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5753 (Spectre variant 1) is mitigated in the system as tested and documented.

Yes: The test sponsor attests, as of date of publication, that CVE-2017-5715 (Spectre variant 2) is mitigated in the system as tested and documented.

Platform Notes

Workload Profile set to General Throughput Compute

Determinism Control set to Manual

Performance Determinism set to Power Deterministic

Memory Patrol Scrubbing set to Disabled

ACPI CST C2 Latency set to 18 microseconds

NUMA memory domains per socket set to Two memory domains per socket

Thermal Configuration set to Maximum Cooling

AMD Periodic Directory Rinse set to Periodic

Workload Profile set to Custom

Power Regulator set to OS Control Mode

The reference code/AGESA version used in this ROM is version Turin-PI 1.0.0.3

Sysinfo program /home/cpu2017_new/bin/sysinfo

Rev: r6732 of 2022-11-07 fe91c89b7ed5c36ae2c92cc097bec197

running on localhost.localdomain Tue Jan 21 21:25:05 2025

SUT (System Under Test) info as seen by some common utilities.

Table of contents

-
1. uname -a
 2. w
 3. Username
 4. ulimit -a
 5. sysinfo process ancestry
 6. /proc/cpuinfo
 7. lscpu
 8. numactl --hardware
 9. /proc/meminfo
 10. who -r
 11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)
 12. Failed units, from systemctl list-units --state=failed
 13. Services, from systemctl list-unit-files

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1250

SPECrate®2017_int_peak = 1280

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Platform Notes (Continued)

14. Linux kernel boot-time arguments, from /proc/cmdline
15. cpupower frequency-info
16. tuned-adm active
17. sysctl
18. /sys/kernel/mm/transparent_hugepage
19. /sys/kernel/mm/transparent_hugepage/khugepaged
20. OS release
21. Disk information
22. /sys/devices/virtual/dmi/id
23. dmidecode
24. BIOS

1. uname -a
Linux localhost.localdomain 6.4.0-150600.21-default #1 SMP PREEMPT_DYNAMIC Thu May 16 11:09:22 UTC 2024
(36c1e09) x86_64 x86_64 x86_64 GNU/Linux

2. w
21:25:05 up 3 min, 2 users, load average: 0.39, 0.43, 0.19
USER TTY FROM LOGIN@ IDLE JCPU PCPU WHAT
root pts/0 172.17.1.13 21:23 25.00s 1.01s 0.07s /bin/bash ./amd_rate_aocc500_znver5_A1.sh

3. Username
From environment variable \$USER: root

4. ulimit -a
core file size (blocks, -c) unlimited
data seg size (kbytes, -d) unlimited
scheduling priority (-e) 0
file size (blocks, -f) unlimited
pending signals (-i) 3093887
max locked memory (kbytes, -l) 2097152
max memory size (kbytes, -m) unlimited
open files (-n) 1024
pipe size (512 bytes, -p) 8
POSIX message queues (bytes, -q) 819200
real-time priority (-r) 0
stack size (kbytes, -s) unlimited
cpu time (seconds, -t) unlimited
max user processes (-u) 3093887
virtual memory (kbytes, -v) unlimited
file locks (-x) unlimited

5. sysinfo process ancestry
/usr/lib/systemd/systemd --switched-root --system --deserialize=42
sshd: /usr/sbin/sshd -D [listener] 0 of 10-100 startups
sshd: root [priv]
sshd: root@pts/0
-bash
python3 ./run_intrate.py
/bin/bash ./amd_rate_aocc500_znver5_A1.sh
runcpu --config amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 intrate
runcpu --configfile amd_rate_aocc500_znver5_A1.cfg --tune all --reportable --iterations 3 --nopower
--runmode rate --tune base:peak --size test:train:refrate intrate --nopreenv --note-preenv --logfile
\$SPEC/tmp/CPU2017.003/temlogs/preenv.intrate.003.0.log --lognum 003.0 --from_runcpu 2

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1250

SPECrate®2017_int_peak = 1280

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
specperl $SPEC/bin/sysinfo
$SPEC = /home/cpu2017_new
```

```
-----
6. /proc/cpuinfo
model name      : AMD EPYC 9845 160-Core Processor
vendor_id      : AuthenticAMD
cpu family      : 26
model          : 17
stepping       : 0
microcode      : 0xb101028
bugs           : sysret_ss_attrs spectre_v1 spectre_v2 spec_store_bypass
TLB size       : 192 4K pages
cpu cores      : 160
siblings       : 320
1 physical ids (chips)
320 processors (hardware threads)
physical id 0: core ids 0-159
physical id 0: apicids 0-319
```

Caution: /proc/cpuinfo data regarding chips, cores, and threads is not necessarily reliable, especially for virtualized systems. Use the above data carefully.

7. lscpu

From lscpu from util-linux 2.39.3:

```
Architecture:      x86_64
CPU op-mode(s):    32-bit, 64-bit
Address sizes:      52 bits physical, 57 bits virtual
Byte Order:        Little Endian
CPU(s):            320
On-line CPU(s) list: 0-319
Vendor ID:         AuthenticAMD
BIOS Vendor ID:    Advanced Micro Devices, Inc.
Model name:        AMD EPYC 9845 160-Core Processor
BIOS Model name:   AMD EPYC 9845 160-Core Processor
BIOS CPU family:   107
CPU family:        26
Model:             17
Thread(s) per core: 2
Core(s) per socket: 160
Socket(s):         1
Stepping:          0
Frequency boost:    enabled
CPU(s) scaling MHz: 101%
CPU max MHz:       2100.0000
CPU min MHz:       1500.0000
BogoMIPS:          4193.27
Flags:             fpu vme de pse tsc msr pae mce cx8 apic sep mtrr pge mca cmov pat
                  pse36 clflush mmx fxsr sse sse2 ht syscall nx mmxext fxsr_opt pdpe1gb
                  rdtscp lm constant_tsc rep_good amd_lbr_v2 nopl nonstop_tsc cpuid
                  extd_apicid aperfmperf rapl pni pclmulqdq monitor ssse3 fma cx16 pcid
                  sse4_1 sse4_2 x2apic movbe popcnt aes xsave avx f16c rdrand lahf_lm
                  cmp_legacy svm extapic cr8_legacy abm sse4a misalignsse 3dnowprefetch
                  osvw ibs skinit wdt tce topoext perfctr_core perfctr_nb bpeext
                  perfctr_llc mwaitx cpb cat_l3 cdp_l3 hw_pstate ssbd mba perfmon_v2
                  ibrs ibpb stibp ibrs_enhanced vmmcall fsgsbase tsc_adjust bmi1 avx2
                  smep bmi2 erms invpcid cqm rdt_a avx512f avx512dq rdseed adx smap
                  avx512ifma clflushopt clwb avx512cd sha_ni avx512bw avx512vl xsaveopt
                  xsavec xgetbv1 xsaves cqm_llc cqm_occup_llc cqm_mbm_total
```

CPU @ 2.1GHz

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1250

SPECrate®2017_int_peak = 1280

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Platform Notes (Continued)

cqm_mbm_local user_shstk avx_vnni avx512_bf16 clzero irperf
xsaveerptr rdpru wbnoinvd amd_ppin cppc arat npt lbrv svm_lock
nrip_save tsc_scale vmcb_clean flushbyasid decodeassists pausefilter
pfthreshold avic v_vmsave_vmload vgif x2avic v_spec_ctrl vnmi
avx512vbmi umip pku ospke avx512_vbmi2 gfni vaes vpclmulqdq
avx512_vnni avx512_bitalg avx512_vpopcntdq la57 rdpid bus_lock_detect
movdiri movdir64b overflow_recov succor smca fsrm avx512_vp2intersect
flush_lld debug_swap

AMD-V

7.5 MiB (160 instances)

5 MiB (160 instances)

160 MiB (160 instances)

320 MiB (10 instances)

2

Virtualization:

L1d cache:

L1i cache:

L2 cache:

L3 cache:

NUMA node(s):

NUMA node0 CPU(s):

NUMA node1 CPU(s):

Vulnerability Gather data sampling:

Vulnerability Itlb multihit:

Vulnerability L1tf:

Vulnerability Mds:

Vulnerability Meltdown:

Vulnerability Mmio stale data:

Vulnerability Reg file data sampling:

Vulnerability Retbleed:

Vulnerability Spec rstack overflow:

Vulnerability Spec store bypass:

Vulnerability Spectre v1:

Vulnerability Spectre v2:

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

Not affected

From lscpu --cache:

NAME	ONE-SIZE	ALL-SIZE	WAYS	TYPE	LEVEL	SETS	PHY-LINE	COHERENCY-SIZE
L1d	48K	7.5M	12	Data	1	64	1	64
L1i	32K	5M	8	Instruction	1	64	1	64
L2	1M	160M	16	Unified	2	1024	1	64
L3	32M	320M	16	Unified	3	32768	1	64

8. numactl --hardware

NOTE: a numactl 'node' might or might not correspond to a physical chip.

available: 2 nodes (0-1)

node 0 cpus: 0-79,160-239

node 0 size: 386651 MB

node 0 free: 385666 MB

node 1 cpus: 80-159,240-319

node 1 size: 386850 MB

node 1 free: 385857 MB

node distances:

node 0 1

0: 10 12

1: 12 10

9. /proc/meminfo

MemTotal: 792065892 kB

10. who -r

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1250

SPECrate®2017_int_peak = 1280

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Platform Notes (Continued)

run-level 3 Jan 21 21:23

11. Systemd service manager version: systemd 254 (254.10+suse.84.ge8d77af424)

Default Target Status
multi-user degraded

12. Failed units, from systemctl list-units --state=failed

UNIT	LOAD	ACTIVE	SUB	DESCRIPTION
* NetworkManager-wait-online.service	loaded	failed	failed	Network Manager Wait Online

13. Services, from systemctl list-unit-files

STATE	UNIT FILES
enabled	ModemManager NetworkManager NetworkManager-dispatcher NetworkManager-wait-online YaST2-Firstboot YaST2-Second-Stage apparmor appstream-sync-cache auditd bluetooth cron display-manager getty@ irqbalance issue-generator kbdsettings klog lvm2-monitor nscd postfix purge-kernels rollback rsyslog smartd sshd systemd-pstore wpa_supplicant
enabled-runtime	systemd-remount-fs
disabled	accounts-daemon autofs autoyast-initscripts blk-availability bluetooth-mesh boot-sysctl ca-certificates chrony-wait chronyd console-getty cups cups-browsed debug-shell dmraid-activation dnsmasq ebttables exchange-bmc-os-info firewallld fsidd gpm grub2-once haveged hwloc-dump-hwdata ipmi ipmievd issue-add-ssh-keys kexec-load lunmask man-db-create multipathd nfs nfs-blkmap nmb openvpn@ ostree-remount rpcbind rpmconfigcheck rsyncd rtkit-daemon serial-getty@ smartd_generate_opts smb snmpd snmptrapd speech-dispatcherd systemd-boot-check-no-failures systemd-confext systemd-network-generator systemd-sysext systemd-time-wait-sync systemd-timesyncd tuned udisks2 update-system-flatpaks upower vncserver@ wicked wickedd-auto4 wickedd-dhcp4 wickedd-dhcp6 wickedd-nanny wpa_supplicant@
indirect	pcscd saned@ systemd-userdbd wickedd

14. Linux kernel boot-time arguments, from /proc/cmdline

BOOT_IMAGE=/boot/vmlinuz-6.4.0-150600.21-default
root=UUID=2ecde7f3-1fd0-4b78-b405-d37301501b53
splash=silent
mitigations=auto
quiet
security=apparmor

15. cpupower frequency-info

analyzing CPU 148:
current policy: frequency should be within 1.50 GHz and 2.10 GHz.
The governor "performance" may decide which speed to use
within this range.
boost state support:
Supported: yes
Active: yes

16. tuned-adm active

No current active profile.

17. sysctl

kernel.numa_balancing	1
kernel.randomize_va_space	0
vm.compaction_proactiveness	20
vm.dirty_background_bytes	0

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1250

SPECrate®2017_int_peak = 1280

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Platform Notes (Continued)

```
vm.dirty_background_ratio      10
vm.dirty_bytes                 0
vm.dirty_expire_centisecs     3000
vm.dirty_ratio                 8
vm.dirty_writeback_centisecs   500
vm.dirtytime_expire_seconds   43200
vm.extfrag_threshold           500
vm.min_unmapped_ratio          1
vm.nr_hugepages                0
vm.nr_hugepages_mempolicy      0
vm.nr_overcommit_hugepages     0
vm.swappiness                   1
vm.watermark_boost_factor      15000
vm.watermark_scale_factor      10
vm.zone_reclaim_mode           1
```

```
-----
18. /sys/kernel/mm/transparent_hugepage
defrag      [always] defer defer+madvice madvice never
enabled     [always] madvice never
hpage_pmd_size 2097152
shmem_enabled always within_size advise [never] deny force
-----
```

```
-----
19. /sys/kernel/mm/transparent_hugepage/khugepaged
alloc_sleep_millisecs 60000
defrag                 1
max_ptes_none          511
max_ptes_shared        256
max_ptes_swap          64
pages_to_scan          4096
scan_sleep_millisecs   10000
-----
```

```
-----
20. OS release
From /etc/*-release /etc/*-version
os-release SUSE Linux Enterprise Server 15 SP6
-----
```

```
-----
21. Disk information
SPEC is set to: /home/cpu2017_new
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdc4       xfs   436G  162G  274G  38% /home
-----
```

```
-----
22. /sys/devices/virtual/dmi/id
Vendor:      HPE
Product:     ProLiant DL325 Gen11
Product Family: ProLiant
Serial:      DL325G11-010
-----
```

```
-----
23. dmidecode
Additional information from dmidecode 3.4 follows.  WARNING: Use caution when you interpret this section.
The 'dmidecode' program reads system data which is "intended to allow hardware to be accurately
determined", but the intent may not be met, as there are frequent changes to hardware, firmware, and the
"DMTF SMBIOS" standard.
Memory:
  6x Micron MTC40F2046S1RC64BD2 MWFF 64 GB 2 rank 6400
  6x Micron MTC40F2046S1RC64BD2 QSFF 64 GB 2 rank 6400
-----
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1250

SPECrate®2017_int_peak = 1280

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Platform Notes (Continued)

24. BIOS

(This section combines info from /sys/devices and dmidecode.)

BIOS Vendor: HPE
BIOS Version: 2.30
BIOS Date: 01/17/2025
BIOS Revision: 2.30
Firmware Revision: 1.63

Compiler Version Notes

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 502.gcc_r(peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: i386-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C | 500.perlbench_r(base, peak) 502.gcc_r(base) 505.mcf_r(base, peak) 525.x264_r(base, peak)
| 557.xz_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

C++ | 520.omnetpp_r(base, peak) 523.xalancbmk_r(base, peak) 531.deepsjeng_r(base, peak)
| 541.leela_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1250

SPECrate®2017_int_peak = 1280

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Compiler Version Notes (Continued)

=====

Fortran | 548.exchange2_r(base, peak)

AMD clang version 17.0.6 (CLANG: AOCC_5.0.0-Build#1316 2024_09_09)
Target: x86_64-unknown-linux-gnu
Thread model: posix
InstalledDir: /opt/AMD/aocc/aocc-compiler-rel-5.0.0-4925-1316/bin

Base Compiler Invocation

C benchmarks:

clang

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Base Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64
502.gcc_r: -DSPEC_LP64
505.mcf_r: -DSPEC_LP64
520.omnetpp_r: -DSPEC_LP64
523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64
525.x264_r: -DSPEC_LP64
531.deepsjeng_r: -DSPEC_LP64
541.leela_r: -DSPEC_LP64
548.exchange2_r: -DSPEC_LP64
557.xz_r: -DSPEC_LP64

Base Optimization Flags

C benchmarks:

-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand -fenable-aggressive-gather
-Wl,-mllvm -Wl,-extra-inliner -z muldefs -O3 -march=znver5
-fveclib=AMDLIBM -ffast-math -fno-PIE -no-pie -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1250

SPECrate®2017_int_peak = 1280

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Base Optimization Flags (Continued)

C benchmarks (continued):

```
-mllvm -inline-threshold=1000 -fremap-arrays -fstrip-mining  
-mllvm -reduce-array-computations=3 -zopt -lamdlibm -lflang  
-lamdalloc-ext -ldl
```

C++ benchmarks:

```
-m64 -std=c++14 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-do-block-reorder=advanced -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto -mllvm -unroll-threshold=100  
-mllvm -loop-unswitch-threshold=200000  
-mllvm -reduce-array-computations=3 -zopt -fno-PIE -no-pie  
-fvirtual-function-elimination -fvisibility=hidden  
-mllvm -do-block-reorder=advanced -lamdlibm -lflang -lamdalloc-ext  
-ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6  
-Wl,-mllvm -Wl,-reduce-array-computations=3  
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop  
-Wl,-mllvm -Wl,-enable-iv-split -z muldefs -O3 -march=znver5  
-fveclib=AMDLIBM -ffast-math -flto  
-fepilog-vectorization-of-inductions -mllvm -optimize-strided-mem-cost  
-floop-transform -mllvm -unroll-aggressive -mllvm -unroll-threshold=500  
-lamdlibm -lflang -lamdalloc -ldl
```

Base Other Flags

C benchmarks:

```
-Wno-unused-command-line-argument
```

C++ benchmarks:

```
-Wno-unused-command-line-argument
```

Fortran benchmarks:

```
-Wno-unused-command-line-argument
```

Peak Compiler Invocation

C benchmarks:

```
clang
```

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1250

SPECrate®2017_int_peak = 1280

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Peak Compiler Invocation (Continued)

C++ benchmarks:

clang++

Fortran benchmarks:

flang

Peak Portability Flags

500.perlbench_r: -DSPEC_LINUX_X64 -DSPEC_LP64

502.gcc_r: -D_FILE_OFFSET_BITS=64

505.mcf_r: -DSPEC_LP64

520.omnetpp_r: -DSPEC_LP64

523.xalancbmk_r: -DSPEC_LINUX -DSPEC_LP64

525.x264_r: -DSPEC_LP64

531.deepsjeng_r: -DSPEC_LP64

541.leela_r: -DSPEC_LP64

548.exchange2_r: -DSPEC_LP64

557.xz_r: -DSPEC_LP64

Peak Optimization Flags

C benchmarks:

500.perlbench_r: basepeak = yes

502.gcc_r: -m32 -flto -Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner
-z muldefs -Ofast -march=znver5 -fveclib=AMDLIBM
-ffast-math -fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -fgnu89-inline
-lamdalloc

505.mcf_r: basepeak = yes

525.x264_r: basepeak = yes

557.xz_r: -m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-ldist-scalar-expand
-fenable-aggressive-gather -Wl,-mllvm -Wl,-extra-inliner

(Continued on next page)



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1250

SPECrate®2017_int_peak = 1280

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Peak Optimization Flags (Continued)

557.xz_r (continued):

```
-Ofast -march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-fstruct-layout=7 -mllvm -unroll-threshold=50
-fremap-arrays -fstrip-mining
-mllvm -inline-threshold=1000
-mllvm -reduce-array-computations=3 -zopt -lamdlibm
-lflang -lamdalloc-ext -ldl
```

C++ benchmarks:

520.omnetpp_r: basepeak = yes

523.xalancbmk_r: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt
-fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl
```

531.deepsjeng_r: basepeak = yes

541.leela_r: -m64 -std=c++14

```
-Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-do-block-reorder=advanced -Ofast
-march=znver5 -fveclib=AMDLIBM -ffast-math -flto
-mllvm -unroll-threshold=100
-mllvm -reduce-array-computations=3 -zopt -fno-PIE
-no-pie -fvirtual-function-elimination -fvisibility=hidden
-mllvm -do-block-reorder=advanced -lamdlibm -lflang
-lamdalloc-ext -ldl
```

Fortran benchmarks:

```
-m64 -Wl,-mllvm -Wl,-align-all-nofallthru-blocks=6
-Wl,-mllvm -Wl,-reduce-array-computations=3
-Wl,-mllvm -Wl,-inline-recursion=4 -Wl,-mllvm -Wl,-lsr-in-nested-loop
-Wl,-mllvm -Wl,-enable-iv-split -O3 -march=znver5 -fveclib=AMDLIBM
-ffast-math -flto -fepilog-vectorization-of-inductions
-mllvm -optimize-strided-mem-cost -floop-transform
-mllvm -unroll-aggressive -mllvm -unroll-threshold=500 -lamdlibm
-lflang -lamdalloc -ldl
```



SPEC CPU®2017 Integer Rate Result

Copyright 2017-2025 Standard Performance Evaluation Corporation

Hewlett Packard Enterprise

(Test Sponsor: HPE)

ProLiant DL325 Gen11

(2.10 GHz, AMD EPYC 9845)

SPECrate®2017_int_base = 1250

SPECrate®2017_int_peak = 1280

CPU2017 License: 3

Test Sponsor: HPE

Tested by: HPE

Test Date: Jan-2025

Hardware Availability: Mar-2025

Software Availability: Oct-2024

Peak Other Flags

C benchmarks (except as noted below):

-Wno-unused-command-line-argument

502.gcc_r: -L/usr/lib32 -Wno-unused-command-line-argument

-L/home/work/cpu2017/v119/aocc5/1316/amd_rate_aocc500_znver5_A_lib/lib32

C++ benchmarks:

-Wno-unused-command-line-argument

Fortran benchmarks:

-Wno-unused-command-line-argument

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.html>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.5.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2017/flags/aocc500-flags.2024-10-10.xml>

<http://www.spec.org/cpu2017/flags/HPE-Platform-Flags-AMD-Turin-rev1.5.xml>

SPEC CPU and SPECrate are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester. For other inquiries, please contact info@spec.org.

Tested with SPEC CPU®2017 v1.1.9 on 2025-01-21 21:25:04-0500.

Report generated on 2025-05-08 10:01:54 by CPU2017 PDF formatter v6716.

Originally published on 2025-05-06.