



SPEC® MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

NEC

SPECmpiM_peak2007 = Not Run

NEC HPC1812Rg-2 (Intel Xeon E5-2650 v4, 2.20 GHz,
DDR4-2400 MHz, SMT ON, Turbo ON)

SPECmpiM_base2007 = 82.2

MPI2007 license: 055A


Test date: Sep-2017

Test sponsor: RWTH University Aachen

Hardware Availability: Oct-2016

Tested by: Bo Wang

Software Availability: Oct-2016

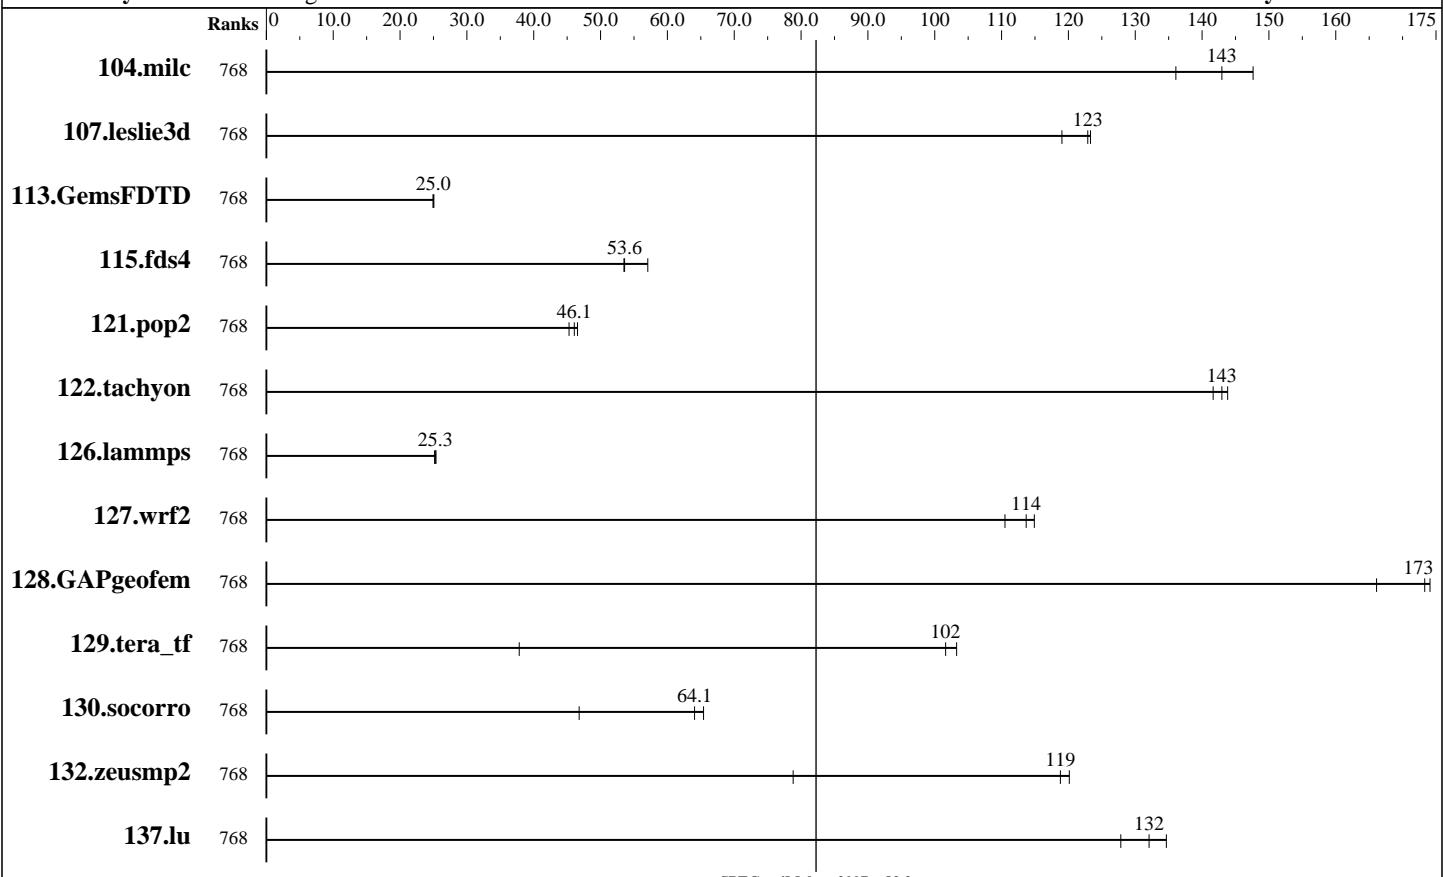

Results Table

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
104.milc	768	11.5	136	<u>10.9</u>	<u>143</u>	10.6	148									
107.leslie3d	768	43.9	119	42.3	123	<u>42.5</u>	<u>123</u>									
113.GemsFDTD	768	253	25.0	<u>253</u>	<u>25.0</u>	252	25.1									
115.fds4	768	36.5	53.5	34.2	57.1	<u>36.4</u>	<u>53.6</u>									
121.pop2	768	91.2	45.3	88.7	46.6	<u>89.6</u>	<u>46.1</u>									
122.tachyon	768	19.7	142	19.4	144	<u>19.6</u>	<u>143</u>									
126.lammps	768	116	25.2	<u>115</u>	<u>25.3</u>	115	25.4									
127.wrf2	768	<u>68.6</u>	<u>114</u>	67.8	115	70.5	111									
128.GAPgeomfem	768	12.4	166	11.9	174	<u>11.9</u>	<u>173</u>									
129.tera_tf	768	26.8	103	<u>27.2</u>	<u>102</u>	73.2	37.8									

Table continues on next page. Results appear in the order in which they were run. Bold underlined text indicates a median measurement.



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

NEC

NEC HPC1812Rg-2 (Intel Xeon E5-2650 v4, 2.20 GHz, DDR4-2400 MHz, SMT ON, Turbo ON)

SPECmpIM_peak2007 = Not Run

SPECmpIM_base2007 = 82.2

MPI2007 license: 055A

Test date: Sep-2017

Test sponsor: RWTH University Aachen

Hardware Availability: Oct-2016

Tested by: Bo Wang

Software Availability: Oct-2016

Results Table (Continued)

Benchmark	Base								Peak							
	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Ranks	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
130.socorro	768	59.6	64.1	58.4	65.4	81.6	46.8									
132.zeusmp2	768	25.8	120	26.1	119	39.4	78.8									
137.lu	768	27.8	132	27.3	135	28.8	128									

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Hardware Summary

Type of System: Homogeneous
 Compute Node: NEC HPC
 Interconnects: Omni-Path Architecture(MPI)
 Gigabit Ethernet(I/O)
 File Server Node: NFSv3
 Total Compute Nodes: 32
 Total Chips: 64
 Total Cores: 768
 Total Threads: 1536
 Total Memory: 4 TB
 Base Ranks Run: 768
 Minimum Peak Ranks: --
 Maximum Peak Ranks: --

Software Summary

C Compiler: Intel C++ Composer XE 2017 for Linux, Version 17.0.2.174
 C++ Compiler: Intel C++ Composer XE 2017 for Linux, Version 17.0.2.174
 Fortran Compiler: Intel Fortran Composer XE 2017 for Linux, Version 17.0.2.174
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 MPI Library: Intel MPI Library 2017 for Linux, Version 2017.1.132
 Other MPI Info: None
 Pre-processors: No
 Other Software: None

Node Description: NEC HPC

Hardware

Number of nodes: 32
 Uses of the node: compute
 Vendor: Intel
 Model: NEC HPC 1812Rg
 CPU Name: Intel Xeon E5-2650 v4
 CPU(s) orderable: 1-2 chips
 Chips enabled: 2
 Cores enabled: 24
 Cores per chip: 12
 Threads per core: 2
 CPU Characteristics: 12 core, 2.2 GHz, 9.6 GT/s QPI
 Intel Turbo Boost Technology up to 2.9 GHz
 Hyper-Threading Technology enabled
 2200
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 30 MB I+D on chip per chip
 shared / 12 cores
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx8 PC4-2400T-R)
 Disk Subsystem: SATA, Samsung SM863, 120GB, SSD
 Other Hardware:
 Adapter: Intel Omni-Path Host Fabric Interface Adapter 100 Series 1 Port PCIe x8

Software

Adapter: Intel Omni-Path Host Fabric Interface Adapter 100 Series 1 Port PCIe x8
 Adapter Driver: Intel Omni-Path Host Fabric Interface 2.33.5100
 Adapter Firmware: Operating System: CentOS Linux release 7.3.1611 (Core)
 Kernel 3.10.0-514.26.1.el7.x86_64
 Local File System: Linux/xfs
 Shared File System: NFSv3
 System State: Multi-User, run level 3
 Other Software: None

Continued on next page



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

NEC

NEC HPC1812Rg-2 (Intel Xeon E5-2650 v4, 2.20 GHz, DDR4-2400 MHz, SMT ON, Turbo ON)

SPECmpIM_peak2007 = Not Run

SPECmpIM_base2007 = 82.2

MPI2007 license: 055A

Test date: Sep-2017

Test sponsor: RWTH University Aachen

Hardware Availability: Oct-2016

Tested by: Bo Wang

Software Availability: Oct-2016

Node Description: NEC HPC

Number of Adapters:	1
Slot Type:	PCI-E x8
Data Rate:	58Gb/s
Ports Used:	1
Interconnect Type:	Omni-Path

Node Description: NFSv3

Hardware

Number of nodes:	1
Uses of the node:	fileserver
Vendor:	NETAPP
Model:	FAS6240
CPU Name:	Intel Xeon CPU X5670
CPU(s) orderable:	1-2 chips
Chips enabled:	2
Cores enabled:	12
Cores per chip:	6
Threads per core:	2
CPU Characteristics:	None
CPU MHz:	2930
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	96 GB
Disk Subsystem:	216 disks, 2 TB/disk, 432TB total
Other Hardware:	None
Adapter:	10 Gigabit Ethernet Controller IX1-SFP+
Number of Adapters:	2
Slot Type:	PCI-Express x8
Data Rate:	10Gbps Ethernet
Ports Used:	2
Interconnect Type:	Ethernet

Software

Adapter:	10 Gigabit Ethernet Controller IX1-SFP+
Adapter Driver:	N/A
Adapter Firmware:	1.8-0
Operating System:	NetApp Release 8.2.3P2 7-Mode
Local File System:	None
Shared File System:	NFSv3
System State:	Multi-User, run level 3
Other Software:	None

Interconnect Description: Omni-Path Architecture(MPI)

Hardware

Vendor:	Intel
Model:	Intel Omni-Path 100 Series
Switch Model:	Intel Omni-Path 100 Series
Number of Switches:	25
Number of Ports:	48
Data Rate:	100Gbps

Software

Continued on next page



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

NEC

NEC HPC1812Rg-2 (Intel Xeon E5-2650 v4, 2.20 GHz,
DDR4-2400 MHz, SMT ON, Turbo ON)

SPECmpiM_peak2007 = Not Run

SPECmpiM_base2007 = 82.2

MPI2007 license: 055A

Test date: Sep-2017

Test sponsor: RWTH University Aachen

Hardware Availability: Oct-2016

Tested by: Bo Wang

Software Availability: Oct-2016

Interconnect Description: Omni-Path Architecture(MPI)

Firmware: 10.3.0.0.81
Topology: 2:1 Blocking Fat tree
Primary Use: MPI traffic

Interconnect Description: Gigabit Ethernet(I/O)

Hardware		Software
Vendor:	Cisco	
Model:	Ethernet 40 Gbps	
Switch Model:	Cisco Nexus5020, N5K-C5020P-BF	
Number of Switches:	1	
Number of Ports:	96	
Data Rate:	40Gbps	
Firmware:	5.2(1)N1(9a)	
Topology:	Star	
Primary Use:	Cluster File System	

Submit Notes

The config file option 'submit' was used.

General Notes

130.socorro (base): "nullify_ptr" src.alt was used.

Base Compiler Invocation

C benchmarks:
mpiicc

C++ benchmarks:

126.lammps: mpiicpc

Fortran benchmarks:
mpiifort

Benchmarks using both Fortran and C:
mpiicc mpiifort



SPEC MPIM2007 Result

Copyright 2006-2010 Standard Performance Evaluation Corporation

NEC

NEC HPC1812Rg-2 (Intel Xeon E5-2650 v4, 2.20 GHz,
DDR4-2400 MHz, SMT ON, Turbo ON)

SPECmpiM_peak2007 = Not Run

SPECmpiM_base2007 = 82.2

MPI2007 license: 055A

Test sponsor: RWTH University Aachen

Tested by: Bo Wang

Test date: Sep-2017

Hardware Availability: Oct-2016

Software Availability: Oct-2016

Base Portability Flags

```
121.pop2: -DSPEC_MPI_CASE_FLAG  
126.lammps: -DMPICH_IGNORE_CXX_SEEK  
127.wrf2: -DSPEC_MPI_CASE_FLAG -DSPEC_MPI_LINUX  
130.socorro: -assume nostd_intent_in
```

Base Optimization Flags

C benchmarks:

```
-O3 -xCORE-AVX2 -no-prec-div
```

C++ benchmarks:

```
126.lammps: -O3 -xCORE-AVX2 -no-prec-div
```

Fortran benchmarks:

```
-O3 -xCORE-AVX2 -no-prec-div
```

Benchmarks using both Fortran and C:

```
-O3 -xCORE-AVX2 -no-prec-div
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/mpi2007/flags/RWTH-Aachen-CLAIx-MPI-2017-SEP.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/mpi2007/flags/RWTH-Aachen-CLAIx-MPI-2017-SEP.xml>

SPEC and SPEC MPI are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC MPI2007 v2.0.

Report generated on Wed Oct 18 13:13:53 2017 by SPEC MPI2007 PS/PDF formatter v1463.

Originally published on 18 October 2017.