OMPM2001 Result

Copyright ©1999-2001, Standard Performance Evaluation Corporation

Fujitsu Limited
PRIMEPOWER2000 (563MHz)

SPECompMpeak2001 = --

SPECompMbase2001 = 4912

SPEC license #:	HPG0003	Tested by:	Fujitsu Limited	Test site:		Test date:	Jun-2001	Hardware Avail:	Feb-2001	Software Avail:	Sep-2001

Benchmark	Reference Time	Base Runtime	Base Ratio	Peak Runtime	Peak Ratio
310.wupwise_m	6000	1080	5555		
312.swim_m	6000	1211	4954		
314.mgrid_m	7300	1322	5520		
316.applu_m	4000	435	9195		
318.galgel_m	5100	1170	4359		
320.equake_m	2600	735	3539		
324.apsi_m	3400	439	7746		
326.gafort_m	8700	1680	5178		
328.fma3d_m	4600	1210	3803		
330.art_m	6400	1685	3798		
332.ammp_m	7000	2174	3219		

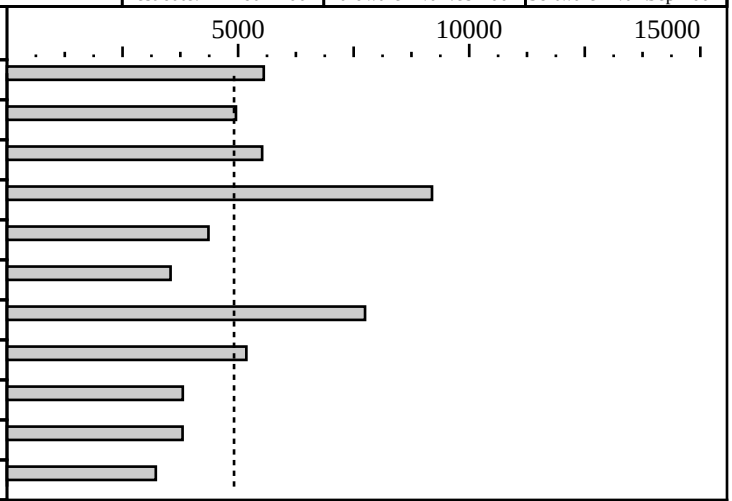

Hardware

CPU:	SPARC64 GP
CPU MHz:	563
FPU:	Integrated
CPU(s) enabled:	18
CPU(s) orderable:	8 to 128
Primary Cache:	128KBI+128KBD on chip
Secondary Cache:	8MB(I+D) off chip, per CPU
L3 Cache:	None
Other Cache:	None
Memory:	128GB
Disk Subsystem:	2 x 18.2GB SCSI (10025rpm)
Other Hardware:	None

Software

OpenMP Threads:	16
Parallel:	--
Operating System:	Solaris 8 - 6/00 Fujitsu Parallelnavi 1.0.2 (NQS, CPU scheduler, largepage)
Compiler:	Fujitsu Parallelnavi 1.0.2 (C, F90)
File System:	ufs
System State:	Multi-user

Notes/Tuning Information

```
Baseline flags:
    C:    -KOMP,largepage -Kfast_GP=2,V9FMADD -x-
    F90:  -KOMP,largepage -Kfast_GP=2,V9FMADD -Nautoobjstack -Knogs

Portability Flags:
    318.galgel_m:  -Am -Fixed -w
    328.fma3d_m:   -Am

Extra Flags:
    330.art_m:     -DINTS_PER_CACHELINE=16 -DDBLS_PER_CACHELINE=8

System tunables:
    /etc/system:
        set shmsys:shminfo_shmmax=268435456
        set shmsys:shminfo_shmmni=4096
        set shmsys:shminfo_shmseg=4096
    /etc/opt/FJSVpnrm/lpg.conf:
        JOB=32G,SHMSEGSIZE=256M
    /etc/opt/FJSVpnrm/cpursc.conf:
        CPU_USE=0-1:0-1
    NQS:
        Per-process data size limit = 40 gigabytes
```

Copyright ©1999-2001, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
          Per-process permanent file size limit = 1 gigabytes
          Per-process memory size limit = 40 gigabytes
          Per-request memory size limit = 32 gigabytes
          Per-process number of cpus limit = 126
          Per-process stack size limit = 4 gigabytes
          Per-process CPU time limit = 453600.000
          Execution mode = SImplex
          Jobclass = 0

   Submitting the runspec to NQS:
       Run the qsub command with the following sh script.

          cd /kaiser2/kit27
          . ./shrc
          OMP_NUM_THREADS=16
          export OMP_NUM_THREADS
          runspec --config=Fujitsu_PP2000_016 --reportable medium
```