CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

IBM Corporation
RS/6000 44P-170 (450 MHz)

SPECint2000 = 316

SPECint_base2000 = 286

SPEC license #: 11 | Tested by: IBM, Austin, TX | Test date: Aug-2000 | Hardware Avail: Oct-2000 | Software Avail: Oct-2000

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	608	230	524	267
175.vpr	1400	492	285	434	323
176.gcc	1100	314	350	306	359
181.mcf	1800	362	498	357	504
186.crafty	1000	329	304	348	287
197.parser	1800	1054	171	816	221
252.eon	1300	464	280	463	281
253.perlbmk	1800	838	215	756	238
254.gap	1100	429	256	401	275
255.vortex	1900	608	312	556	342
256.bzip2	1500	582	258	448	335
300.twolf	3000	724	414	620	484

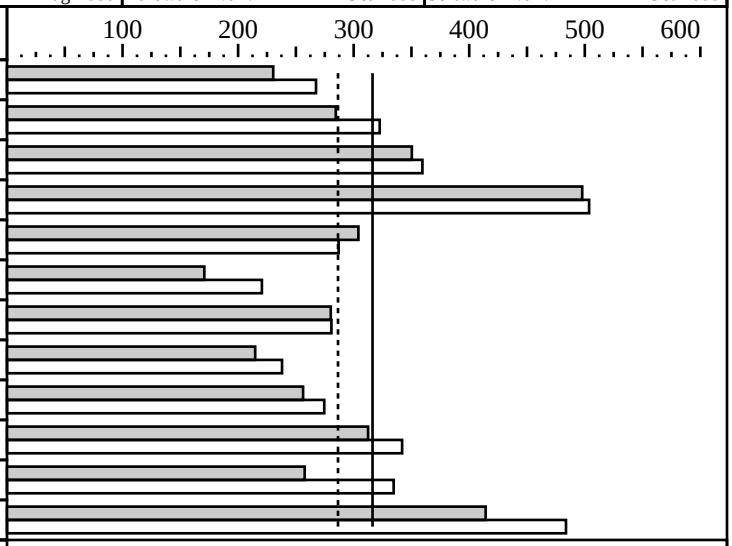

Hardware

CPU:	IBM Power3-II
CPU MHz:	450
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	32KBI+64KBD (on chip)
Secondary Cache:	8MB (I+D) (off chip)
L3 Cache:	None
Other Cache:	None
Memory:	512MB
Disk Subsystem:	1X9.1GB IBM Ultra-2 SCSI, 7200 RPM
Other Hardware:	None

Software

Operating System:	AIX 4.3.3 + beta of APAR IY12051
Compiler:	C: IBM VAC 5.0.1 invoked as 'cc' except where noted as 'xlc' C++: IBM C++ 3.6.6.0 invoked as 'xlC'
File System:	AIX/JFS
System State:	Multi-user

Notes/Tuning Information

```
Portability Flags:
  gcc: -ma -qlanglvl=ansi -DHOST_WORDS_BIG_ENDIAN
  crafty: -DAIX
  eon: -DNEED_EXPLICIT_SPECIALIZATION
  perlbmk: -DSPEC_CPU2000_AIX
  gap: -DSYS_IS_BSD -DSYS_STRING_H -DSYS_HAS_TIME_PROTO -DSYS_HAS_MALLOC_PROTO -D SYS_HAS_CALLOC_PROTO
  twolf: -DHAVE_SIGNED_CHAR
NOTE: The flag combination 'qpdf1/qpdf2' indicates a 2 step compilation
     process, the exact process is as follows:
  fdo_pre0 = rm -rf ${PDFDIR}; mkdir -p ${PDFDIR}
  PASS1_FLAGS    =-qpdf1 {optimization flags}
  PASS1_LDFLAGS  ={libraries} -L{pdf library location} -lpdf
  PASS2_FLAGS    =-qpdf2 {optimization flags}
  PASS2_LDFLAGS  =-{libraries}
Base Optimization Flags:
  C:   -qpdf1/pdf2 -O3 -lhmu -qarch=pwr3
  C++: -qpdf1/pdf2 -O3 -qarch=ppc -qtune=pwr3
Peak Optimization Flags
  175.vpr:     CC=xlc, -O4 -qarch=ppc, -bnso -bI:/lib/syscalls.exp
  176.gcc:     -qpdf1/pdf2 -O3 -lhmu -qarch=pwr3, fdpr -v -R3
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
181.mcf:     -O4
186.crafty:  -O4, fdpr -v -R3
197.parser:  CC=xlc, -qpdf1/pdf2 -O4 -bnso -bI:/lib/syscalls.exp, fdpr -v -R3
252.eon:     -qpdf1/pdf2 -O3 -lhmu -qarch=ppc -qtune=pwr3, fdpr -v -R3
253.perlbmk: -qpdf1/pdf2 -O3 -lhmu -qarch=pwr3 -qdatalocal -qunroll=8, fdpr -v -R3
254.gap:     -O4 -qarch=pwr3, fdpr -v -R3
255.vortex:  -qpdf1/pdf2 -O5 -lhmu -Q=500
256.bzip2:   -O5 -qunroll=8,fdpr -v -R3
300.twolf:   CC=xlc, -qpdf1/pdf2 -O5, fdpr -v -R3
```