CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation

Intel D850GB motherboard(1.5 GHz, Pentium 4 processor)

SPECint2000 = 536

SPECint_base2000 = 524

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Nov-2000 | Hardware Avail: Nov-2000 | Software Avail: Nov-2000

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	253	553	251	557
175.vpr	1400	469	298	468	299
176.gcc	1100	187	588	186	592
181.mcf	1800	380	473	378	476
186.crafty	1000	201	497	202	495
197.parser	1800	381	472	381	472
252.eon	1300	200	650	166	785
253.perlbmk	1800	256	703	256	703
254.gap	1100	155	708	155	710
255.vortex	1900	258	735	251	756
256.bzip2	1500	357	420	351	427
300.twolf	3000	744	403	743	404

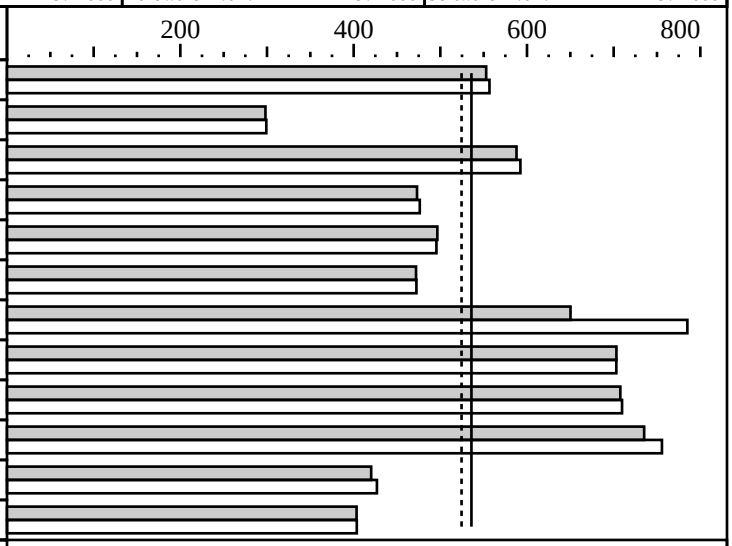

Hardware

CPU:	Pentium 4 processor (1.5 GHz, 400 MHz bus)
CPU MHz:	1500
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12K micro-ops I + 8KB D
Secondary Cache:	256KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	256MB (2 128MB PC800 RDRAM non-ECC modules)
Disk Subsystem:	IBM DTLA-307030 ATA-100
Other Hardware:	Creative Labs Annihalator 2

Software

Operating System:	Windows 2000(Build 2195)
Compiler:	Intel C/C++ Compiler 5.0, Microsoft Visual C++ 6.0 (for libraries), Other software: Microquill SmartHeap V5.0
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -QxW -Qipo shlW32M.lib +FDO
Base tuning for C++ programs: -QxW -Qipo -GX -GR
shlW32M.lib is the SmartHeap library V5.0 from MicroQuill www.microquill.com
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafy: -DNT_i386
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip, 175.vpr, 176.gcc, 181.mcf, 186.crafty, 197.parser
253.perlbmk, 254.gap, 300.twolf:
-QxW -Qipo +FDO shlW32M.lib
255.vortex, 256.bzip2:
-QxW -Qipo +FDO -Oa shlW32M.lib
252.eon:
-QxW -Qipo +FDO
Tested systems can be used with Shin-G ATX case, Delta Inc. power supply
Product description located as of 11/2000:
http://developer.intel.com/design/motherbd/gb/gb_ds.htm
```

CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation	SPECint2000 = 536
Intel D850GB motherboard(1.5 GHz, Pentium 4 processor)	SPECint_base2000 = 524

SPEC license #: 13	Tested by: Intel Corporation	Test date: Nov-2000	Hardware Avail: Nov-2000	Software Avail: Nov-2000

Notes/Tuning Information (Continued)

Motherboard is available through Intel OEM Distribution Channel. See
http://channel.intel.com/business/ibp/boards/d850gb.htm for more information
The system bus runs at 400 MHz