CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Blade Model 2050

SPECint2000 = 610

SPECint_base2000 = 537

SPEC license #: 6 | Tested by: Sun Microsystems, Palo Alto | Test date: Nov-2001 | Hardware Avail: Feb-2002 | Software Avail: Feb-2002

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
164.gzip	1400	323	433	299	469
175.vpr	1400	304	460	268	523
176.gcc	1100	191	577	165	666
181.mcf	1800	273	659	239	753
186.crafty	1000	179	558	146	684
197.parser	1800	369	488	298	604
252.eon	1300	247	527	226	576
253.perlbmk	1800	333	540	308	585
254.gap	1100	295	372	287	383
255.vortex	1900	258	738	201	943
256.bzip2	1500	238	629	227	662
300.twolf	3000	527	570	465	645

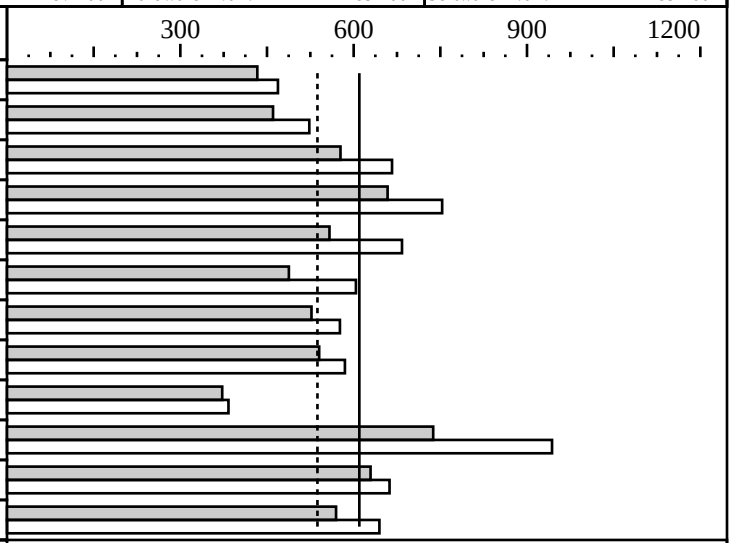

Hardware

CPU:	UltraSPARC III Cu
CPU MHz:	1050
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	2
Parallel:	No
Primary Cache:	32KBI+64KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	None
Other Cache:	None
Memory:	8GB
Disk Subsystem:	2 x 73GB
Other Hardware:	None

Software

Operating System:	Solaris 8 10/01
Compiler:	C: Forte Developer 7 EA C++: Forte Developer 6 update 2
File System:	tmpfs
System State:	Multi-User

Notes/Tuning Information

```
Portability:
 176.gcc: -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
 186.crafty: -DSUN
 252.eon: -library=iostream
 253.perlbmk: -DSPEC_CPU2000_SOLARIS
 254.gap: -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
          -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO

Base Flags:
 Base C   flags: -fast -xcrossfile -ll2amm -xprofile
 Base C++ flags: -fast -xcrossfile -xprofile

Peak Flags:
 164.gzip: -xO5 -xtarget=native -xalias_level=std -W2,-whole -xcrossfile -W2,-Ainline -xprofile
 175.vpr: -fast -xalias_level=std -xcrossfile -xsfpconst -xdepend -W2,-whole
          -Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1,-Qeps:rp_filtering_margin=100
          -xregs=syst -lmopt -xprofile
 176.gcc: -fast -xcrossfile -W2,-whole -Wc,-Qgsched-trace_late=1,-Qgsched-T4 -ll2amm -xprofile
 181.mcf: -fast -xcrossfile -xprefetch -xdepend
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
          -Wc,-Qms_pipe-pref,-Qlp=1-fa=1-av=64-t=3-fl=1 -lprism32 -xprofile
 186.crafty: -fast -xF -xinline= -xcrossfile -Wc,-Qgsched-trace_late=1,-Qgsched-T4
            -xalias_level=strong -xregs=syst -W2,-Ashort_ldst,-Aivel:duplicate_loops
            -xprofile
 197.parser: -fast -xdepend -xprefetch=no%auto -xcrossfile -xregs=syst
          -Wc,-Qgsched-trace_late=1,-Qgsched-T4 -xalias_level=strong -Wc,-Qipa:valueprediction -xprofile
 252.eon: -fast -xcrossfile -xsafe=mem -Qoption iropt -Mt500,-xrestrict
          -Qoption cg -Qgsched-trace_late=1,-Qgsched-T4 -xprofile
              -Wc,-Qiselect-sw_pf_tbl_th=20 -xprofile
 253.perlbmk: -xO5 -xtarget=native -xcrossfile -xalias_level=std -xsafe=mem
              -Wc,-Qgsched-trace_late=1,-Qgsched-T4,-Qgsched-trace_spec_load=1
              -Wc,-Qinline_memcpy=32 -Wc,-Qiselect-funcalign=32,-Qicache-chbab=1
 254.gap: -fast -xcrossfile -xalias_level=std -xprefetch -W2,-whole -lprism32 -xprofile
 255.vortex: -fast -xcrossfile -Wc,-Qeps:enabled=1,-Qeps:do_spec_load=1
            -Wc,-Qinline_memcpy=32 -W2,-Aheap,-reroll=1,-Aunroll,-Ms1,-Mt500,-Mr6000,-crit
             -Wc,-Qdepgraph-early_cross_call=1 -Wc,-Qiselect-funcalign=32
             -Wc,-Qpeep-Sh0 -xrestrict -xdepend -ll2amm -lprism32 -xprofile
 256.bzip2: -fast -W2,-Abopt -xcrossfile -xalias_level=strong
            -Wc,-Qiselect-funcalign=32 -xdepend -xregs=syst -xprofile
 300.twolf: -fast -xalias_level=strong -xsafe=mem -xcrossfile -xprefetch=no%auto
            -Wc,-Qms_pipe+intdivusefp -xprofile

Forte Developer 7 EA (Early Access) will ship by Feb-2002
Forte Developer 7 (final) will ship May-2002

ONESTEP=yes for all benchmarks in base and peak

Shell Environments:
 LD_LIBRARY_PATH=/usr/lib:/opt/fd7/lib/v8plusb:/opt/fd7/YNH/lib/v8plusb
 PRISM_HEAP=268435456
 PRISM_MODE=2

 Stack size set to unlimited via "ulimit -s unlimited"

System Settings:
 2nd cpu physically removed from system

Kernel Parameters (/etc/system):
 set shmsys:shminfo_shmmin=1
 set shmsys:shminfo_shmmax=1477846784
 set shmsys:shminfo_shmmni=256
 set shmsys:shminfo_shmseg=400

System configuration details located (as of Nov 2001) at
     http://www.sun.com/desktop/products/ws.html
```