CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos R710 (3.8 GHz Intel Xeon processor, 2MB L2, 800MHz system bus)

SPECint_rate2000 = 42.0

SPECint_rate_base2000 = 41.8

SPEC license #: 97 | Tested by: Acer Incorporated | Test date: Oct-2005 | Hardware Avail: Oct-2005 | Software Avail: May-2005

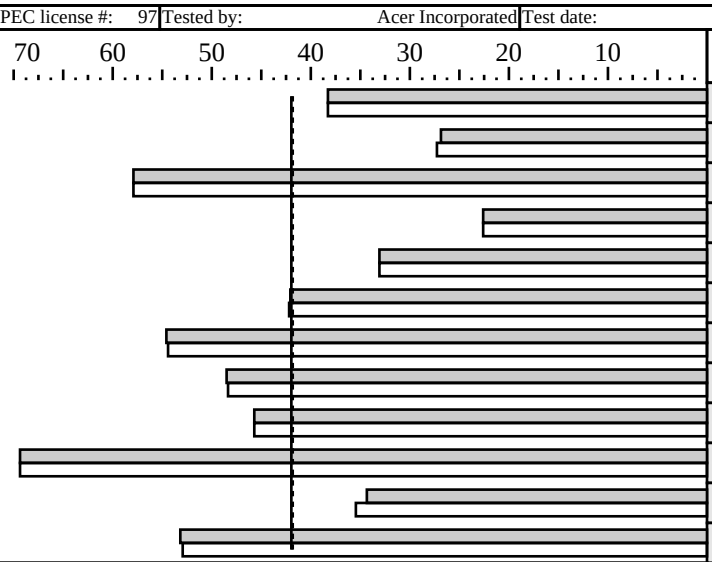

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	4	170	38.3	4	170	38.3
175.vpr	4	242	26.9	4	238	27.3
176.gcc	4	88.1	57.9	4	88.1	57.9
181.mcf	4	370	22.6	4	370	22.6
186.crafty	4	140	33.1	4	140	33.1
197.parser	4	199	42.1	4	198	42.2
252.eon	4	111	54.6	4	111	54.4
253.perlbmk	4	172	48.5	4	173	48.4
254.gap	4	112	45.7	4	112	45.7
255.vortex	4	127	69.4	4	127	69.4
256.bzip2	4	203	34.3	4	196	35.5
300.twolf	4	262	53.2	4	263	52.9

Hardware

CPU:	Intel Xeon (3.8 GHz, 2MB L2, 800MHz system bus)
CPU MHz:	3800
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip(Hyper-Threading Technology Enable)
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	12KB(I) micro-ops + 16KB(D) on chip
Secondary Cache:	2048KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	6 x 1024MB ECC DDR2-400 SDRAM
Disk Subsystem:	1 x 146GB 10000RPM U320 SCSI HDD
Other Hardware:	

Software

Operating System:	Microsoft Windows Server 2003 Enterprise Edition (Build 3790)
Compiler:	Intel C++ Compiler 9.0 Build 20050430Z for IA32 Microsoft Visual Studio .Net 2003(7.1.3091, for libraries) shlW32M.lib is SmartHeap Library Version 7.4 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
Base tuning for C programs:   -fast +FDO shlW32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO shlW32M.lib
Portability flags:
176.gcc: -Dalloca=_alloca /F10000000
186.crafy: -DNT_i386
252.eon:   Approved stdcpp src.alt used
253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
164.gzip:     basepeak=yes
175.vpr:      -fast -Qansi_alias +FDO
176.gcc:      basepeak=yes
181.mcf:      basepeak=yes
186.crafty:   basepeak=yes
197.parser:   -fast -Qansi_alias  +FDO
252.eon:      -fast +FDO
253.perlbmk:  -fast -Qansi_alias +FDO shlW32M.lib
254.gap:      basepeak=yes
255.vortex    basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Acer Incorporated

Acer Altos R710 (3.8 GHz Intel Xeon processor, 2MB L2, 800MHz system bus)

SPECint_rate2000 = 42.0

SPECint_rate_base2000 = 41.8

SPEC license #: 97	Tested by: Acer Incorporated	Test date: Oct-2005	Hardware Avail: Oct-2005	Software Avail: May-2005

Notes/Tuning Information (Continued)

```
256.bzip2:   -fast -Oa -Qunroll1 +FDO
300.twolf:    -fast -O3 +FDO shlW32M.lib
Enable hardware prefetching and adjacent cache line prefetch BIOS setting
Product description located at http://www.acer.com
```