CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company
hp visualize c3600 UNIX workstation

SPECfp_rate2000 = 5.02

SPECfp_rate_base2000 = 4.54

SPEC license #: 3 | Tested by: HP TCL Fort Collins CO | Test date: Oct-2000 | Hardware Avail: Feb-2000 | Software Avail: Sep-2000

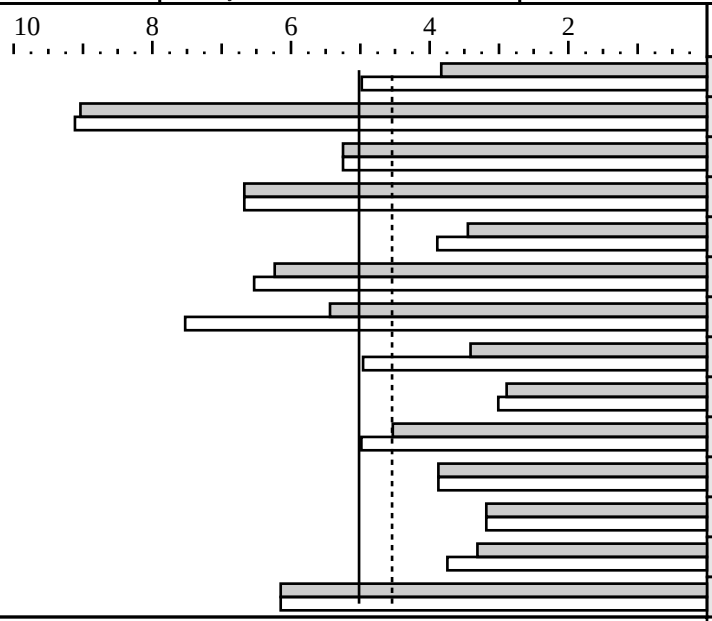

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	1	484	3.83	1	373	4.98
171.swim	1	398	9.04	1	394	9.12
172.mgrid	1	398	5.25	1	398	5.25
173.applu	1	365	6.67	1	365	6.67
177.mesa	1	471	3.45	1	418	3.89
178.galgel	1	540	6.23	1	515	6.53
179.art	1	555	5.44	1	401	7.53
183.equake	1	442	3.41	1	304	4.96
187.facerec	1	763	2.89	1	732	3.01
188.ammp	1	563	4.53	1	512	4.98
189.lucas	1	599	3.87	1	599	3.87
191.fma3d	1	765	3.18	1	765	3.18
200.sixtrack	1	385	3.31	1	341	3.74
301.apsi	1	491	6.15	1	491	6.15

Hardware

CPU:	552 MHz PA-8600
CPU MHz:	552
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	--
Primary Cache:	500KBI+1MBD (on chip)
Secondary Cache:	none
L3 Cache:	none
Other Cache:	None
Memory:	2GB
Disk Subsystem:	1x9Gbye 10000RPM + 1x9Gbyte LVD 10000RPM
Other Hardware:	--

Software

Operating System:	HP-UX B.11.0
Compiler:	HP-UX f90 20000928 (181730) B.11.01.25 HP92453-01 A.11.01.21505.GP HP C Compiler HP-UX f77 971027 (162928) B.11.00.01
File System:	HP-UX VxFS
System State:	Multi-user

Notes/Tuning Information

```
Portability flags:
cc: -Ae
178.galgel: +source=fixed

Base flags:
f90: +O3 +Onofltacc -Wl,-a,archive -Wl,+FPD
cc:  +Oall +Odataprefetch -Wl,-a,archive +I/+P

Peak flags:
Peak flags = base flags for: 172.mgrid, 173.applu, 189.lucas, 191.fma3d and 301.apsi
168.wupwise: f77 +DA2.0 +DS2.0 +O4 +Odataprefetch +Onofltacc -Wl,+FPD -Wl,-a,archive
171.swim:     +O3  +Ocachepadcommon +Oloop_unroll -Wl,+FPD -Wl,-a,archive
177.mesa:    +I/+P +Oall +Odataprefetch  +Opromote_indirect_calls -Wl,+FPD -Wl,-a,archive
178.galgel:   +Oall +fastallocatable-Wl,+FPD -Wl,-a,archive -llapack
              RM_SOURCES = lapak.f90
179.art:     +Oall +Onodataprefetch +I/+P +Onofltacc +Optrs_strongly_typed -Wl,+FPD -Wl,-a,archive
183.equake:   +Oall +Odataprefetch +Optrs_strongly_typed -Wl,+FPD -Wl,-a,archive
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
187.facerec:  +O2 +Ofastaccess +fastallocatable -Wl,+FPD
              -Wl,-a,archive -Wl,/opt/langtools/lib/fastmem.o
188.ammp:     +Oall +Odataprefetch +Optrs_strongly_typed +I/+P  -Wl,+FPD -Wl,-a,archive
200.sixtrack: +Oall +fastallocatable +Onodataprefetch -Wl,+FPD
              -Wl,-a,archive -Wl,/opt/langtools/lib/fastmem.o

Kernel tunables:
vps_pagesize=4096, vps_ceiling=4096, dbc_min_pct=25, dbc_max_pct=25
```