CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company
hp workstation b2600

SPECfp_rate2000 = 5.10

SPECfp_rate_base2000 = 4.61

SPEC license #: 3 | Tested by: HP Fort Collins, CO | Test date: Mar-2001 | Hardware Avail: Jun-2001 | Software Avail: Jul-2001

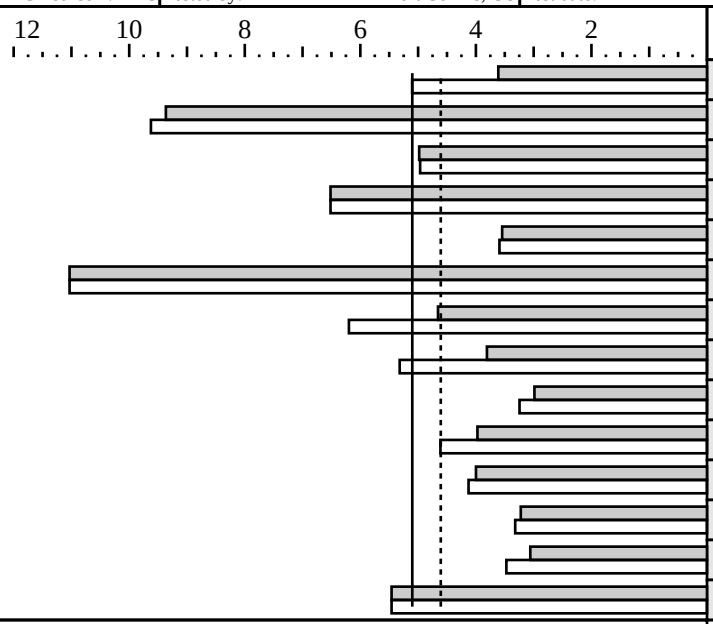

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	1	514	3.61	1	364	5.10
171.swim	1	384	9.37	1	374	9.62
172.mgrid	1	419	4.98	1	421	4.96
173.applu	1	374	6.52	1	374	6.52
177.mesa	1	458	3.55	1	452	3.59
178.galgel	1	305	11.0	1	305	11.0
179.art	1	648	4.66	1	487	6.20
183.equake	1	396	3.81	1	284	5.32
187.facerec	1	738	2.99	1	679	3.24
188.ammp	1	642	3.97	1	553	4.61
189.lucas	1	580	4.00	1	562	4.13
191.fma3d	1	756	3.22	1	734	3.32
200.sixtrack	1	417	3.06	1	367	3.47
301.apsi	1	552	5.46	1	552	5.46

Hardware

CPU:	PA8600
CPU MHz:	500
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	--
Primary Cache:	0.5MBI + 1.0MBD (on chip)
Secondary Cache:	none
L3 Cache:	none
Other Cache:	none
Memory:	1GB
Disk Subsystem:	1 x 18 GB LVD
Other Hardware:	--

Software

Operating System:	HP-UX 11.0
Compiler:	HP ANSI C 11.11.02 HP Fortran90 B.11.01.40
File System:	HP-UX VxFS
System State:	Multi-user

Notes/Tuning Information

```
Portability Flags:
  178.galgel:  +source=fixed

Base Flags:
  f90: +O3 +Onofltacc -Wl,-a,archive -Wl,+FPD
  C:   +I/+P +O4 +Odataprefetch -Wl,-a,archive

Peak flags same as base for 173.applu, 178.galgel, 301.apsi

Peak Flags:

  All:         -Wl,+FPD -Wl,-a,archive
  168.wupwise: +cat +O3 +Odataprefetch +Onofltacc
  171.swim:    +O3 +Onolimit +Oinline_budget=1000
  172.mgrid:   +O3 +Ocache_pad_common +Oloop_unroll=6
               +Oinline_budget=10
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
  177.mesa:    +I/+P +Oall +Odataprefetch +Opromote_indirect_calls
  179.art:     +I/+P +Oall +Onodataprefetch +Onofltacc
               +Optrs_strongly_typed +Opromote_indirect_calls
  183.equake:  +O4 +Olibcalls +Odataprefetch +Optrs_strongly_typed
               +Opromote_indirect_calls
  187.facerec: +cat +O3 +Ofastaccess
  188.ammp:    +I/+P +Oall +Odataprefetch +Optrs_strongly_typed
               +Opromote_indirect_calls
  189.lucas:   +O3 +Onoinline
  191.fma3d:   +O3 +Onolimit
  200.sixtrack: +cat +O3 +Onolibcalls +Onolimit +Onoinline
                +Onodataprefetch
  ONESTEP=true for 168.wupwise, 187.facerec, 200.sixtrack

System tunables:

vps_pagesize 4096, vps_ceiling 4096
dbc_min_pct 25, dbc_max_pct 25
```