CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Hewlett-Packard Company
hp server rp7400

SPECint_rate2000 = 12.5

SPECint_rate_base2000 = 11.8

SPEC license #: 3 | Tested by: HP | Test date: Aug-2001 | Hardware Avail: Sep-2001 | Software Avail: Sep-2001

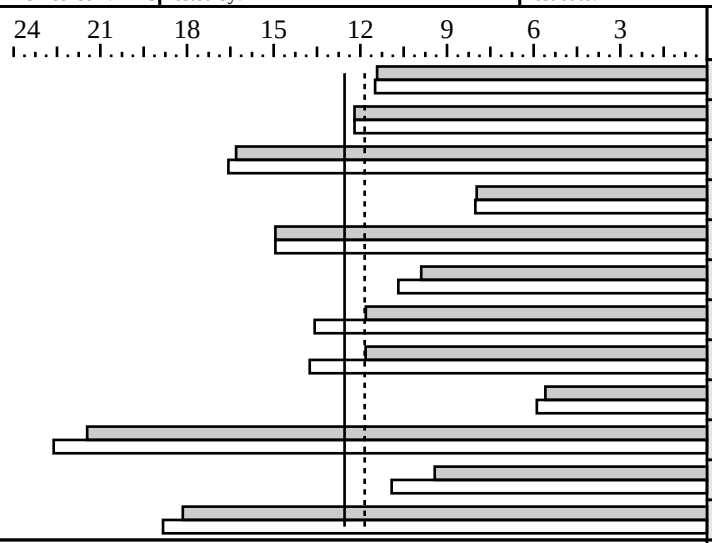

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	2	284	11.4	2	283	11.5
175.vpr	2	266	12.2	2	266	12.2
176.gcc	2	157	16.3	2	154	16.6
181.mcf	2	524	7.97	2	521	8.02
186.crafty	2	155	14.9	2	155	14.9
197.parser	2	422	9.89	2	391	10.7
252.eon	2	255	11.8	2	222	13.6
253.perlbmk	2	353	11.8	2	304	13.8
254.gap	2	456	5.59	2	433	5.89
255.vortex	2	205	21.5	2	195	22.6
256.bzip2	2	369	9.42	2	319	10.9
300.twolf	2	384	18.1	2	370	18.8

Hardware

CPU:	PA-8700
CPU MHz:	750
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip
CPU(s) orderable:	1-8
Parallel:	No
Primary Cache:	0.75MBI + 1.5MBD on chip
Secondary Cache:	None
L3 Cache:	None
Other Cache:	None
Memory:	16GB
Disk Subsystem:	2x9GB SCSI disk
Other Hardware:	None

Software

Operating System:	B.11.11.0109.6 HP-UX 11i, September 2001 HWE patches
Compiler:	HP ANSI C 11.11.03 aC++ C.03.30.02 PHSS_24207 libm patch
File System:	HFS
System State:	Multi-user

Notes/Tuning Information

```
Portability Flags:
  176.gcc:   -DHOST_WORDS_BIG_ENDIAN
  186.crafty:  -DHP
  252.eon:  -DFMAX_IS_DOUBLE
  253.perlbmk: -DSPEC_CPU2000_HP
  254.gap:   -DSPEC_CPU2000_HP -DSYS_IS_USG -DSYS_HAS_IOCTL_PROTO
             -DSYS_HAS_TIME_PROTO -DSYS_HAS_CALLOC_PROTO

Base Flags:
  C:   +Oall +I/+P +Ostatic_prediction -Wl,-aarchive
  C++: +O3 +I/+P +Ostatic_prediction -Wl,-aarchive

Peak Flags:

  164.gzip: +Oall +Optrs_strongly_typed +Oinline_budget=800
            +I/+P +Ostatic_prediction -Wl,-aarchive
  175.vpr:  basepeak=true
  176.gcc:  +Oall +ESlit +ESfic +Optrs_strongly_typed
            +I/+P +Ostatic_prediction -Wl,-aarchive
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    181.mcf:  +Oall +Owhole_program_mode +Opromote_indirect_calls
              +I/+P +Ostatic_prediction -Wl,-aarchive
    186.crafty: basepeak=true
    197.parser: +Oall +Odataprefetch +ESfic +Oinline_budget=400
                +Owhole_program_mode
                +I/+P +Ostatic_prediction -Wl,-aarchive
    252.eon: +noeh +O4 +Optrs_strongly_typed +Olibcalls +Oentrysched
             +A +ESfic
             +I/+P +Ostatic_prediction -Wl,-aarchive
    253.perlbmk: +Oall +ESlit +ESfic +Optrs_strongly_typed
             +Opromote_indirect_calls -Wl,/opt/langtools/lib/fastmem.o
             +I/+P +Ostatic_prediction -Wl,-aarchive
    254.gap: +Oall +ESlit +ESfic +Optrs_strongly_typed
             +Opromote_indirect_calls
             +I/+P +Ostatic_prediction -Wl,-aarchive
    255.vortex: +Oall +Oinline_budget=800 +Optrs_strongly_typed
                +I/+P +Ostatic_prediction -Wl,-aarchive
    256.bzip2: +Oall +Odataprefetch +Optrs_strongly_typed
               +Owhole_program_mode +Onoptrs_to_globals
               +Oinline_budget=80 +OEslit +OEsfic
               +I/+P +Ostatic_prediction -Wl,-aarchive
    300.twolf: +Oall +Optrs_strongly_typed
               +I/+P +Ostatic_prediction -Wl,-aarchive

System tunables:

   vps_pagesize 4096, vps_ceiling 16384
   dbc_min_pct 20, dbc_max_pct 20
   maxdsiz 2063835136, maxssiz 401604608
   Unused processors disabled at boot
```