CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation

Intel D850MD motherboard (1.7 GHz, Pentium 4 processor)

SPECfp2000 = 659

SPECfp_base2000 = 648

SPEC license #: 13 | Tested by: Intel Corporation | Test date: Nov-2001 | Hardware Avail: Aug-2001 | Software Avail: Oct-2001

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	185	863	184	869
171.swim	3100	248	1248	246	1262
172.mgrid	1800	285	631	273	659
173.applu	2100	290	723	284	741
177.mesa	1400	202	692	201	697
178.galgel	2900	349	830	346	837
179.art	2600	500	520	486	535
183.equake	1300	177	736	169	770
187.facerec	1900	256	743	254	747
188.ammp	2200	579	380	572	384
189.lucas	2000	223	899	223	899
191.fma3d	2100	375	561	374	562
200.sixtrack	1100	353	312	339	324
301.apsi	2600	544	478	544	478

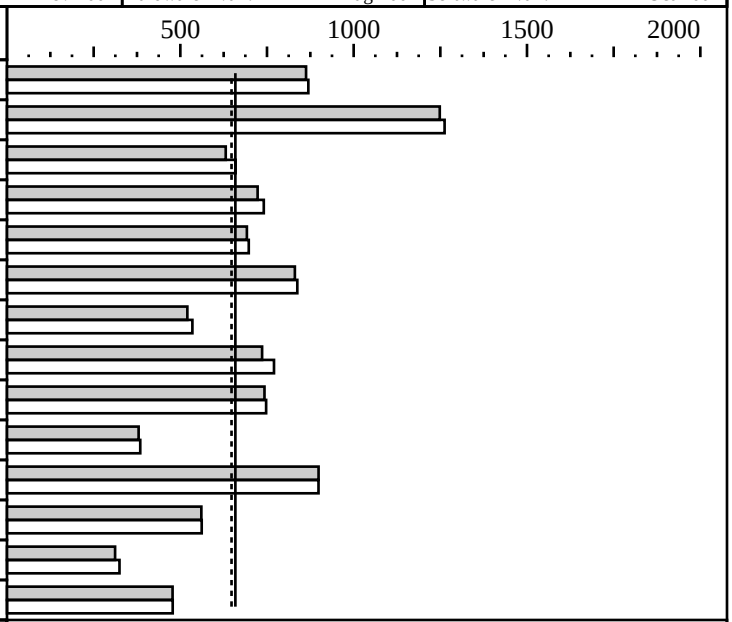

Hardware

CPU:	Pentium 4 processor (1.7 GHz, 400 MHz bus)
CPU MHz:	1700
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1
Parallel:	No
Primary Cache:	12k micro-ops I + 8KBD on chip
Secondary Cache:	256KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	256 MB (2 128 MB PC800 RDRAM non-ECC modules)
Disk Subsystem:	IBM DTLA-307030 ATA-100
Other Hardware:	None

Software

Operating System:	Windows XP Professional(Build 2600)
Compiler:	Intel C++ Compiler 5.0.1 Build 010525Z Intel Fortran Compiler 5.0.1 Build 010525Z Microsoft Visual C++ 6.0 SP5(for libraries)
File System:	FAT32
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=  -Qprof_gen  PASS2=-Qprof_use
Base tuning:  -Qipo -QxW -O3 +FDO
Portability:
178.galgel:   -FI /F32000000
Peak tuning:
168.wupwise:  -Qipo -QxW  -O3 +FDO
171.swim:     -Qipo -QxW  -O3 +FDO
172.mgrid:    -Qipo -QaxW -O3 +FDO
173.applu:    -Qipo -QxW  -O3 -Qscalar_rep- -Qauto +FDO
177.mesa:     -Qipo -Oa -QxW -O3 +FDO
178.galgel:   -Qipo -QxW  -O3 +FDO
179.art:      -Qipo -QxW  -O3 -Oa +FDO
183.equake:   -Qipo -QxW  -Oa -Qrcd +FDO
187.facerec:  -Qipo -QxW  -O3 +FDO
188.ammp:     -Qipo -QxW  -O3 -Oa +FDO
189.lucas:    -Qipo -QxW  -O3 +FDO
191.fma3d:    -Qipo -QxW  -O3 +FDO
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Intel Corporation

Intel D850MD motherboard (1.7 GHz, Pentium 4 processor)

SPECfp2000 = 659

SPECfp_base2000 = 648

SPEC license #: 13	Tested by: Intel Corporation	Test date: Nov-2001	Hardware Avail: Aug-2001	Software Avail: Oct-2001

Notes/Tuning Information (Continued)

```
200.sixtrack: -Qipo -QxW  +FDO
301.apsi:     -Qipo -QxW  -O3 +FDO
Tested systems can be used with Shin-G ATX case, Delta Inc. power supply PS-300GB-1 B
Product description located as of 1/2002:
http://developer.intel.com/design/motherbd/md/index.htm
Motherboard ordering information is available at:
http://program.intel.com/shared/products/boards/D850MD/index.htm
The system bus runs at 400 MHz
```