CFP2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Dell
PowerEdge 6650 (2.0 GHz Xeon MP)

SPECfp_rate2000 = 8.11

SPECfp_rate_base2000 = 7.85

SPEC license #: 55 | Tested by: Dell, Round Rock, TX | Test date: Sep-2002 | Hardware Avail: Nov-2002 | Software Avail: Jun-2001

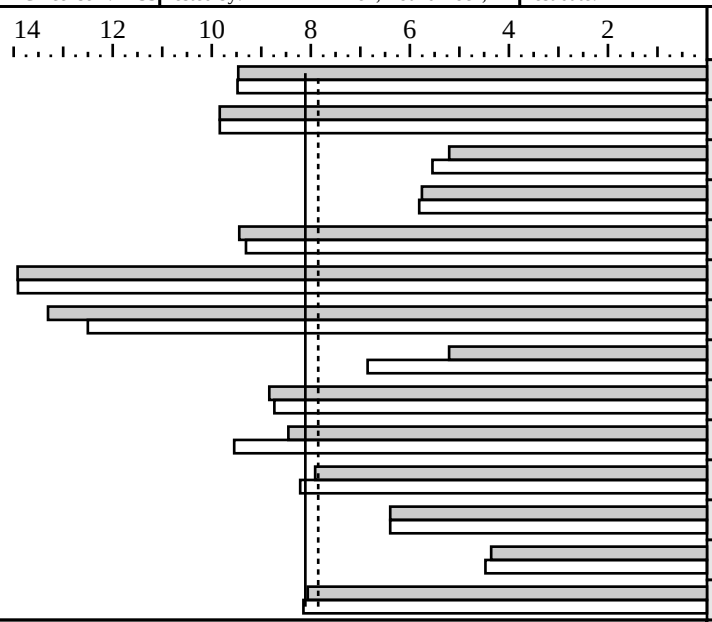

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	1	196	9.46	1	196	9.48
171.swim	1	365	9.84	1	366	9.84
172.mgrid	1	401	5.21	1	377	5.54
173.applu	1	423	5.76	1	419	5.81
177.mesa	1	172	9.44	1	174	9.31
178.galgel	1	242	13.9	1	242	13.9
179.art	1	227	13.3	1	241	12.5
183.equake	1	290	5.21	1	220	6.85
187.facerec	1	249	8.84	1	252	8.74
188.ammp	1	302	8.45	1	267	9.55
189.lucas	1	293	7.91	1	282	8.21
191.fma3d	1	381	6.40	1	381	6.40
200.sixtrack	1	293	4.36	1	285	4.47
301.apsi	1	374	8.06	1	370	8.15

Hardware

CPU:	Intel Xeon (400 MHz system bus)
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip (Hyper-Threading Technology disabled)
CPU(s) orderable:	1, 2, 4
Parallel:	No
Primary Cache:	12K(I) micro-ops + 8KB(D) on chip
Secondary Cache:	512KB(I+D) on chip
L3 Cache:	2048KB(I+D) on chip
Other Cache:	None
Memory:	4 x 128MB DDR200
Disk Subsystem:	1 x 36GB SEAGATE ST336706LC
Other Hardware:	None

Software

Operating System:	Windows 2000 Advanced Server (SP2)
Compiler:	Intel C++ and Fortan Compiler 5.0.1 (020125Z) Microsoft Visual C++ 6.0 (SP5) MicroQuill SmartHeap Library 5.0
File System:	NTFS
System State:	Hyper-Threading Technology disabled in BIOS

Notes/Tuning Information

```
PORTABILITY
  178.galgel:   -FI /F32000000
FEEDBACK-DIRECTED OPTIMIZATION
  FDO:         PASS1= /Qprof_gen  PASS2= /Qprof_use
BASE TUNING
  C/F77/F90:    /Qipo +FDO /QxW /O3
PEAK TUNING
  168.wupwise:  /Qipo +FDO /QxW /Qprefetch
  171.swim:     /Qipo +FDO /QxW /O3
  172.mgrid:    /Qipo +FDO /QaxW /O3
  173.applu:    /Qipo +FDO /QxW /O3 /Qscalar_rep- /Qauto
  177.mesa:     -Qwp_ipo +FDO -QxW -Qunroll0
  178.galgel:   /Qipo +FDO /QxW /O3
  179.art:      -Qipo +FDO -QxW -O3 shlW32M.lib
  183.equake:   -Qwp_ipo +FDO -QxW -Oa shlW32M.lib
  187.facerec:  /Qipo +FDO /QxW /O3 shlW32M.lib
  188.ammp:     -Qipo +FDO -QaxW -Oa
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    189.lucas:    /Qipo /QxW /Qunroll0
    191.fma3d:    /Qipo +FDO /QxW /O3
    200.sixtrack: /Qipo +FDO /QxW
    301.apsi:     /Qipo /QxW /O3
  EXTRA LIBRARIES
    shlW32M.lib:  MicroQuill SmartHeap Library 5.0
                  www.microquill.com
  LIBRARY ORDERING
    187.facerec:  libIEPCF90.lib libintrins.lib libF90.lib libqwin.lib
                  libm.lib shlW32M.lib LIBC.lib libirc.lib OLDNAMES.lib
```