CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire 12K

SPECint_rate2000 = 232

SPECint_rate_base2000 = 206

SPEC license #: 6 | Tested by: Sun Microsystems | Test date: Mar-2003 | Hardware Avail: Mar-2003 | Software Avail: May-2003

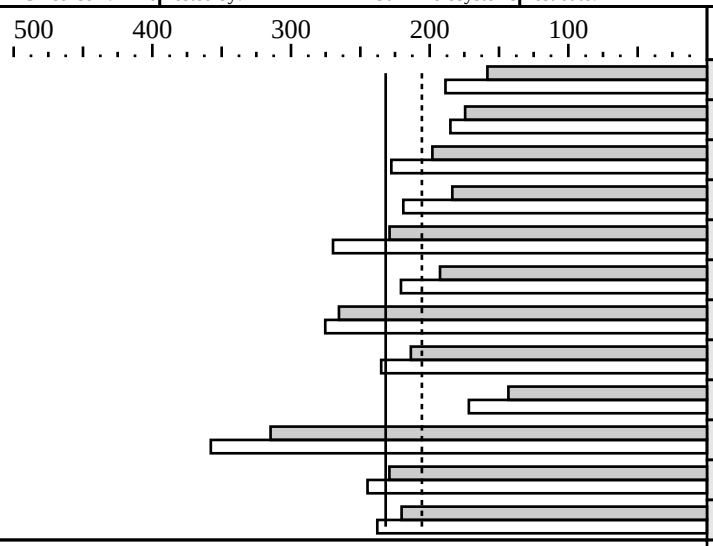

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	32	328	158	32	276	189
175.vpr	32	298	174	32	281	185
176.gcc	32	206	198	32	179	228
181.mcf	32	364	184	32	305	219
186.crafty	32	162	229	32	138	270
197.parser	32	347	193	32	303	221
252.eon	32	182	265	32	175	275
253.perlbmk	32	313	214	32	284	235
254.gap	32	285	143	32	238	172
255.vortex	32	224	315	32	197	358
256.bzip2	32	243	229	32	227	245
300.twolf	32	506	220	32	468	238

Hardware

CPU:	UltraSPARC III Cu
CPU MHz:	1200
FPU:	Integrated
CPU(s) enabled:	32 cores, 32 chips, 1 core/chip
CPU(s) orderable:	4-52
Parallel:	No
Primary Cache:	32KBI+64KBD on chip
Secondary Cache:	8MB(I+D) off chip
L3 Cache:	None
Other Cache:	None
Memory:	256GB 16-way interleaved
Disk Subsystem:	1 x 36GB (System Disk) Sun StorEdge T3, 9 x 18GB striped
Other Hardware:	None

Software

Operating System:	Solaris 9 12/02
Compiler:	Sun ONE Studio 8 (pre-FCS build 3/9) Sun Performance Library 8 (pre-FCS build 3/9)
File System:	ufs with ufs logging
System State:	Multi-User

Notes/Tuning Information

```
Compiler invocation:
  C: cc
  CXX: CC
  F90: f90
  F77: f90

Integer base flags:
     -fast -xipo=2 with ONESTEP=yes and feedback

Integer peak flags:
 ONESTEP=yes and feedback for all benchmarks

 164.gzip:    -xO4  -xbuiltin=%all -xtarget=native -xalias_level=std
              -xipo=2 -Wc,-Qeps:enabled=1,-Qeps:rp_filtering_margin=100
 175.vpr:     -fast -xalias_level=std -xipo=2
              -Wc,-Qeps:enabled=1,-Qeps:rp_filtering_margin=100 -lmopt -lm
 176.gcc:     -fast -xipo=2 -ll2amm
 181.mcf:     -fast -xipo=2 -xprefetch_level=3 -Wc,-Qeps:enabled=1
 186.crafty:  -fast -xinline= -xipo=2 -xalias_level=strong -W2,-Ashort_ldst
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
                Feedback adds -xlinkopt in PASS2
 197.parser:    -fast -xipo=2 -xalias_level=strong
                -Wc,-Qgsched-T6,-Qipa:valueprediction
 252.eon:       -fast -xipo=2 -xalias_level=compatible -noex
                -Qoption cg -Qeps:enabled=1,-Qeps:ws=32
 253.perlbmk:   -xO5 -xtarget=native -xipo -xalias_level=std -xsafe=mem
                -Wc,-Qeps:enabled=1,-Qeps:ws=8,-Qiselect-sw_pf_tbl_th=20,
                -Qiselect-funcalign=32,-Qicache-chbab=1
 254.gap:       -fast -xipo=2 -xalias_level=strong -xvector
                -xprefetch_level=3 -W2,-Abcopy
 255.vortex:    -fast -xrestrict -xipo=2
                -W2,-crit,-Ainline:recursion=1:cs=500:irs=6000
                -Wc,-Qeps:enabled=1,-Qdepgraph-early_cross_call=1,
                -Qiselect-funcalign=32,-Qpeep-Sh0 -ll2amm
 256.bzip2:     -fast -xipo -xalias_level=strong -xrestrict
                -Wc,-Qeps:enabled=1
 300.twolf:     -fast -xalias_level=strong -xsafe=mem -xipo=2
                -xprefetch=no%auto -Wc,-Qms_pipe+intdivusefp

Feedback is done as follows, unless otherwise noted:
 fdo_pre0:  rm -rf ./feedback.profile ./SunWS_cache
 PASS1:     -xprofile=collect:./feedback
 PASS2:     -xprofile=use:./feedback

Portability:
 176.gcc:       -Dalloca=__builtin_alloca -DHOST_WORDS_BIG_ENDIAN
 186.crafty:    -DSUN
 252.eon:       -library=iostream
 253.perlbmk:   -DSPEC_CPU2000_SOLARIS
 254.gap:       -DSYS_IS_USG -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
                -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_IOCTL_PROTO

Shell Environments:
  Stack size set to unlimited via "ulimit -s unlimited"
  MPSSHEAP=4M
  MPSSSTACK=4M
  LD_PRELOAD=mpss.so.1

Kernel Parameters (/etc/system):
  autoup=900
  tune_t_fsflushr=1

Processes were bound to CPUs using submit=pbind
```