CINT2000 Result

Copyright ©1999-2004, Standard Performance Evaluation Corporation

ION
I2X2 (1.4GHz Itanium 2 processor)

SPECint_rate2000 = 10.8

SPECint_rate_base2000 = 10.8

SPEC license #: 2697 | Tested by: K.Josephson, ION | Test date: Jul-2003 | Hardware Avail: Jul-2003 | Software Avail: May-2003

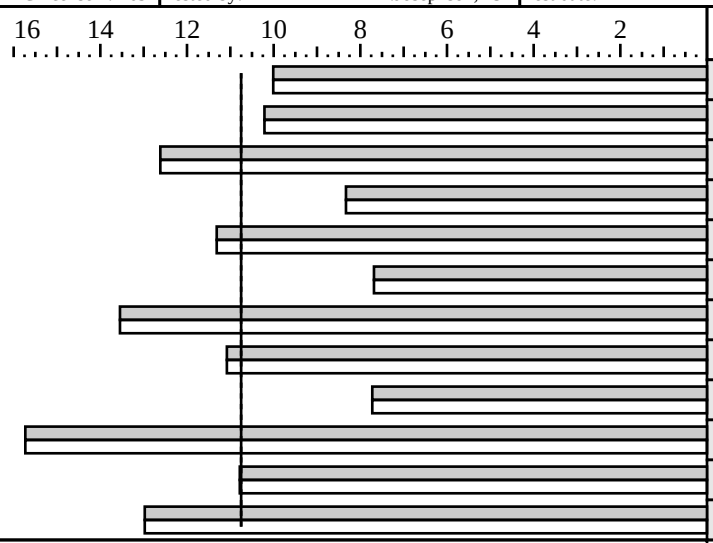

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	1	162	10.0	1	162	10.0
175.vpr	1	159	10.2	1	159	10.2
176.gcc	1	101	12.6	1	101	12.6
181.mcf	1	251	8.33	1	251	8.33
186.crafty	1	103	11.3	1	103	11.3
197.parser	1	272	7.69	1	272	7.69
252.eon	1	111	13.5	1	111	13.5
253.perlbmk	1	188	11.1	1	188	11.1
254.gap	1	165	7.72	1	165	7.72
255.vortex	1	140	15.7	1	140	15.7
256.bzip2	1	161	10.8	1	161	10.8
300.twolf	1	268	13.0	1	268	13.0

Hardware

CPU:	Intel Itanium 2
CPU MHz:	1400
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip
CPU(s) orderable:	1-2
Parallel:	No
Primary Cache:	16KBI + 16KBD (on chip) per CPU
Secondary Cache:	256KB (on chip) per CPU
L3 Cache:	4MB (on chip) per CPU
Other Cache:	N/A
Memory:	8 GB (8x1GB DIMMS)
Disk Subsystem:	1x 36GB SCSI (Seagate Cheetah 10k rpm)
Other Hardware:	None

Software

Operating System:	SuSE Linux Enterprise Server 8
Compiler:	Intel(R) C++ Compiler for Linux 7.1 (Build 20030605)
File System:	ext2
System State:	Multi-user

Notes/Tuning Information

```
Tested by ION Computer Systems
Tests performed with uniprocessor kernel.
Only 1 processor was enabled by operating system.
 +FDO: PASS1=-prof_gen  PASS2=-prof_use

 Baseline optimization flags:
   C programs:       -O3 -ipo +FDO
   C++ programs:     -O2 -ipo -ansi_alias +FDO

 Portability Flags:
   176.gcc: -DSPEC_CPU2000_LP64 -Dalloca=_builtin_alloca -D_LIBC
   186.crafty: -DLINUX_i386
   252.eon: -DSPEC_CPU2000_LP64 -DHAS_ERRLIST
   253.perlbmk: -DSPEC_CPU2000_LP64 -DSPEC_CPU2000_NEED_BOOL
                -DSPEC_CPU2000_LINUX_IA64 -DSPEC_CPU2000_GLIBC22
   254.gap: -DSPEC_CPU2000_LP64 -DSYS_HAS_CALLOC_PROTO -DSYS_IS_USG
            -DSYS_HAS_IOCTL_PROTO -DSYS_HAS_TIME_PROTO -DSYS_HAS_SIGNAL_PROTO
   255.vortex: -DSPEC_CPU2000_LP64
```

Copyright ©1999-2004, Standard Performance Evaluation Corporation

ION
I2X2 (1.4GHz Itanium 2 processor)

SPECint_rate2000 = 10.8
SPECint_rate_base2000 = 10.8

SPEC license #: 2697 | Tested by: K.Josephson, ION | Test date: Jul-2003 | Hardware Avail: Jul-2003 | Software Avail: May-2003

Notes/Tuning Information (Continued)

Peak flags same as baseline (basepeak=true set globally).