CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Advanced Micro Devices

Pogo Linux, PerformanceWare 3566, AMD Opteron (TM) 852

SPECfp_rate2000 = 37.2

SPECfp_rate_base2000 = 35.6

SPEC license #: 49 | Tested by: AMD, Austin, TX | Test date: Feb-2005 | Hardware Avail: May-2005 | Software Avail: Jan-2005

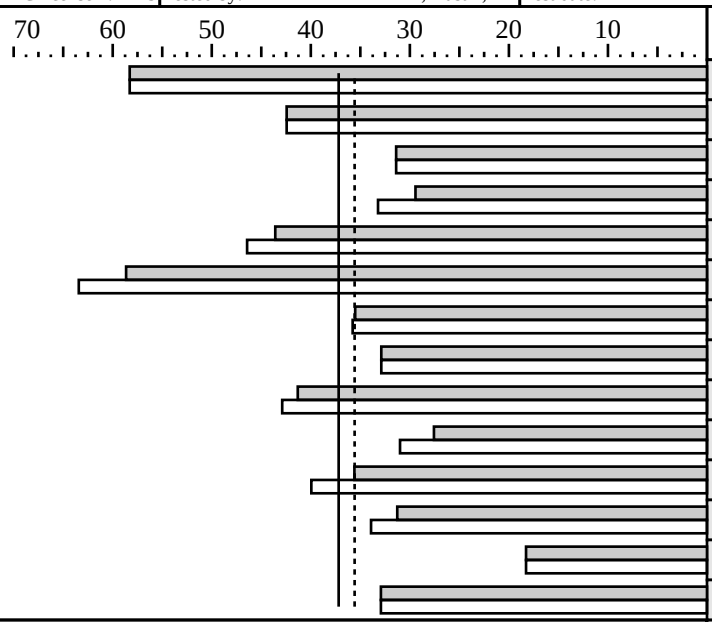

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	63.7	58.3	2	63.7	58.3
171.swim	2	169	42.4	2	169	42.4
172.mgrid	2	133	31.4	2	133	31.4
173.applu	2	166	29.4	2	147	33.2
177.mesa	2	74.5	43.6	2	70.0	46.4
178.galgel	2	115	58.6	2	106	63.4
179.art	2	170	35.5	2	169	35.8
183.equake	2	91.7	32.9	2	91.7	32.9
187.facerec	2	107	41.3	2	103	42.9
188.ammp	2	185	27.6	2	165	31.0
189.lucas	2	130	35.6	2	116	39.9
191.fma3d	2	156	31.3	2	144	33.9
200.sixtrack	2	140	18.3	2	140	18.3
301.apsi	2	183	32.9	2	183	32.9

Hardware

CPU:	AMD Opteron (TM) 852
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip
CPU(s) orderable:	1-4
Parallel:	No
Primary Cache:	64KBI + 64KBD on chip
Secondary Cache:	1024KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	8x1024 MB PC3200 (MICRON) CL3 ECC Reg
Disk Subsystem:	SCSI, Seagate Cheetah Ultra320 ST373307LC, 10K rpm
Other Hardware:	None

Software

Operating System:	Microsoft Windows Server 2003, Enterprise Edition
Compiler:	Intel C++ 8.0 build 20040714Z, Intel Fortran 8.1 build 20041019Z, PGI Fortran compiler 5.2-4 for Windows XP, AMD Core Math library Version 2.1 (ACML), Microsoft Visual Studio .NET 7.0.9466 (libraries), MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use
+ACML is linking with AMD Core Math Library V2.1
ONESTEP is set for all peak runs.
ifort is the Intel Fortran compiler, icl is the Intel C++ compiler and
pgf90 is the PGI Fortran compiler.
The Intel C++ 8.0 and the Intel Fortran 8.1 compilers are setup in the following order:
   "c:program filesintel ortrancompiler80ia32 inifortvars.bat"
   "c:program filesintelcppcompiler80ia32 iniclvars.bat"
To make sure that the correct libraries are selected, the following link option is
added for the peak runs where Intel Fortran 8.1 compiler is used:
    LDOPT = -Fe$@ -link -LIBPATH:"c:program filesintel ortrancompiler80ia32lib"
 (denoted by +LIBPATH:INTEL8.1 in the optimization flags listed below)
Portability:
  178.galgel: -Mfixed
Baseline: C      : icl   -fast -arch:SSE2 -QaxW +FDO
Baseline: Fortran: pgf90 -fastsse -Mipa=fast,inline
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
Peak tuning:
168.wupwise:       pgf90 basepeak=yes
171.swim:          basepeak=yes
172.mgrid:         pgf90 basepeak=yes
173.applu:        ifort -Qipo  -O3  -QaxN -QxW +FDO -auto         +LIBPATH:INTEL8.1
177.mesa:          icl   -Qipo -arch:SSE2       +FDO -Qunroll1 -Qansi_alias
                       -Qoption,f,-ip_ninl_max_stats=1500,-ip_ninl_max_total_stats=4500
179.art:           icl   -Qipo             -Zp4 +FDO
183.equake:        icl   basepeak=yes
178.galgel:       pgf90 -fastsse -Mipa=fast,safe RM_SOURCES=lapak.f90 -Munix +ACML
187.facerec:      ifort -Qipo             -QxW +FDO -Qunroll3     +LIBPATH:INTEL8.1
                       -Qoption,f,-ip_ninl_max_stats=2500,-ip_ninl_max_total_stats=7000
188.ammp:          icl   -Oa   -arch:SSE2  -Zp4      -Qansi_alias
189.lucas:        ifort -Qipo             -QxW      -Qunroll1     +LIBPATH:INTEL8.1
191.fma3d:        ifort -Qipo       -QaxN -QxW +FDO -Qansi-alias- +LIBPATH:INTEL8.1
200.sixtrack:      pgf90 basepeak=yes
301.apsi:          pgf90 basepeak=yes
Bios Rev 2.32.3.1
All memory slots populated on all CPU(s)
Physical Address Extension (PAE) enabled
```