CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Acer Incorporated
Altos G520 (3.0 GHz Intel Xeon)

SPECfp2000 = 1401

SPECfp_base2000 = 1384

SPEC license #: 97 | Tested by: Acer Incorporated | Test date: Jun-2005 | Hardware Avail: May-2005 | Software Avail: Oct-2004

Benchmark	Reference Time	Base Runtime	Base Ratio	Runtime	Ratio
168.wupwise	1600	73.8	2169	73.8	2169
171.swim	3100	155	1996	155	1997
172.mgrid	1800	145	1243	145	1243
173.applu	2100	164	1278	164	1278
177.mesa	1400	105	1331	105	1331
178.galgel	2900	148	1963	148	1963
179.art	2600	112	2314	112	2314
183.equake	1300	69.7	1864	69.7	1865
187.facerec	1900	126	1508	126	1508
188.ammp	2200	309	713	262	839
189.lucas	2000	114	1753	114	1755
191.fma3d	2100	172	1224	172	1224
200.sixtrack	1100	205	538	203	542
301.apsi	2600	264	987	263	987

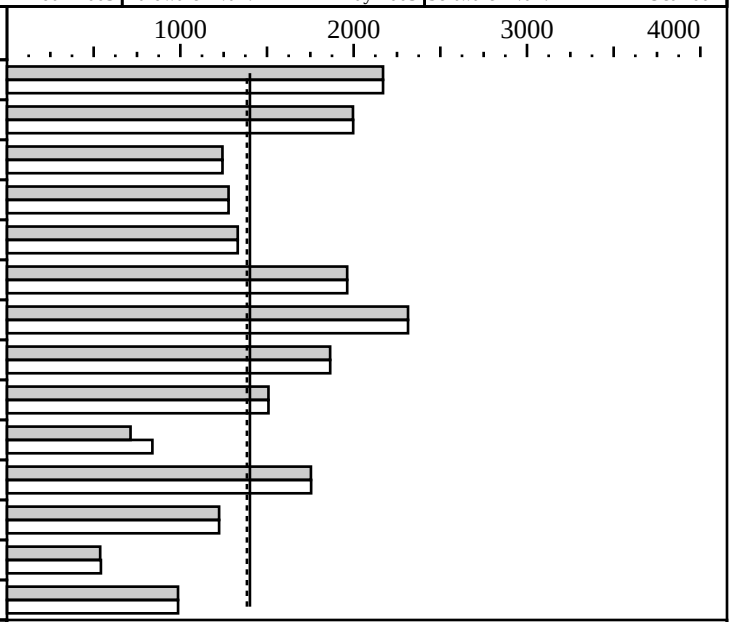

Hardware

CPU:	Intel Xeon (3.0 GHz, 1MB L2, 800MHz system bus)
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip(Hyper-Threading Technology disabled)
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	12KB(I) micro-ops + 16KB(D) on chip
Secondary Cache:	1024KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4 x 1024MB ECC DDR-333 SDRAM
Disk Subsystem:	1 x 120GB 7200RPM SATA HDD
Other Hardware:	

Software

Operating System:	Microsoft Windows Server 2003 Enterprise Edition (Build 3790)
Compiler:	Intel C++ Build 20041019Z and Fortran Compiler 8.1 Build 20040802Z Microsoft Visual Studio .Net 2003(7.1.3091, for libraries) SmartHeap Library Version 7.4 from http://www.microquill.com/
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=  -Qprof_gen  PASS2=-Qprof_use
Base tuning for Fortran Programs :  -fast -Qansi_alias +FDO
177.mesa:Base for C Program: -fast +FDO shlw32M.lib
179.art:Base for C Program: -fast +FDO shlw32M.lib
183.equake:Base for C Program: -fast +FDO shlw32M.lib
188.ammp:Base for C Program: -fast +FDO shlw32M.lib
Portability:
178.galgel:   -FI /F32000000
Peak tuning:
168.wupwise:  -fast -Qansi_alias +FDO
171.swim:     -fast -Qansi_alias +FDO
172.mgrid:    -fast -Qansi_alias +FDO
173.applu:  basepeak=yes
177.mesa:   basepeak=yes
178.galgel:   -fast -Qansi_alias +FDO
179.art:      basepeak=yes
183.equake:   -fast -Oa -Qrcd -Qprof_gen shlw32M.lib
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
187.facerec:  basepeak=yes
188.ammp:     -Oa -QxP
189.lucas:    -fast -Qprefetch- +FDO
191.fma3d:    basepeak=yes
200.sixtrack: -Qipo -QxP +FDO
301.apsi:     -fast +FDO
Enable hardware prefetching and adjacent cache line prefetch BIOS setting
Product description located at http://www.acer.com
```