# CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

## IBM Corporation

IBM eServer xSeries 226 (3.2 GHz Intel Xeon)

SPECfp_rate2000 = 30.5

SPECfp_rate_base2000 = 29.7

SPEC license #: 11 | Tested by: IBM, Research Trinagle Park, NC | Test date: Jun-2005 | Hardware Avail: Feb-2005 | Software Avail: Apr-2005

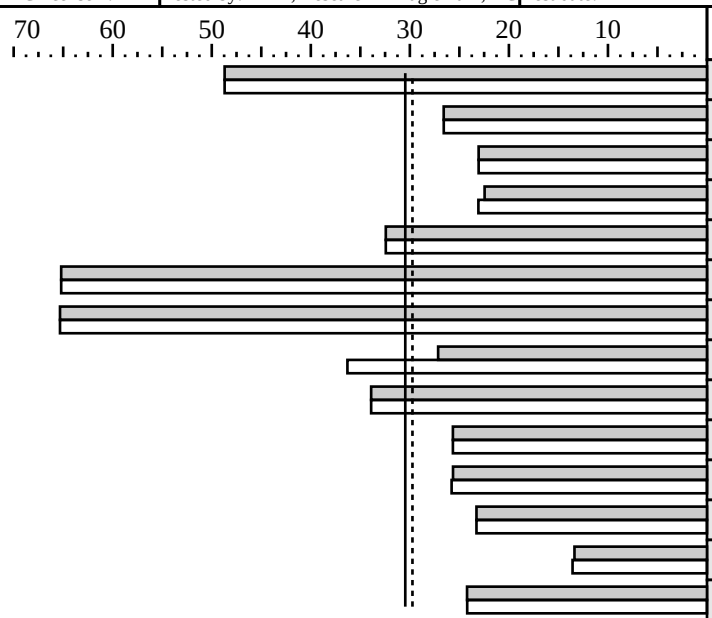


| Benchmark | Base Copies | Base Runtime | Base Ratio | Copies | Runtime | Ratio |
|---|---|---|---|---|---|---|
| 168.wupwise | 2 | 76.2 | 48.7 | 2 | 76.2 | 48.7 |
| 171.swim | 2 | 271 | 26.6 | 2 | 271 | 26.6 |
| 172.mgrid | 2 | 181 | 23.1 | 2 | 181 | 23.1 |
| 173.applu | 2 | 217 | 22.5 | 2 | 211 | 23.1 |
| 177.mesa | 2 | 100 | 32.4 | 2 | 100 | 32.4 |
| 178.galgel | 2 | 103 | 65.2 | 2 | 103 | 65.2 |
| 179.art | 2 | 92.3 | 65.3 | 2 | 92.3 | 65.3 |
| 183.equake | 2 | 111 | 27.1 | 2 | 83.1 | 36.3 |
| 187.facerec | 2 | 130 | 33.9 | 2 | 130 | 33.9 |
| 188.ammp | 2 | 199 | 25.7 | 2 | 199 | 25.7 |
| 189.lucas | 2 | 181 | 25.6 | 2 | 180 | 25.8 |
| 191.fma3d | 2 | 209 | 23.3 | 2 | 209 | 23.3 |
| 200.sixtrack | 2 | 191 | 13.4 | 2 | 188 | 13.6 |
| 301.apsi | 2 | 249 | 24.2 | 2 | 249 | 24.2 |

### Hardware

| | |
|---|---|
| CPU: | Intel Xeon (3.2 GHz Xeon, 2MB L2 Cache, 800 MHz system bus) |
| CPU MHz: | 3200 |
| FPU: | Integrated |
| CPU(s) enabled: | 2 cores, 2 chips, 1 core/chip (Hyper-Threading Technology disabled) |
| CPU(s) orderable: | 1,2 |
| Parallel: | No |
| Primary Cache: | 12K(I) micro-ops + 16KB(D) on chip |
| Secondary Cache: | 2048KB(I+D) on chip |
| L3 Cache: | N/A |
| Other Cache: | N/A |
| Memory: | 4 x 2048 MB PC2-3200 Dual Rank |
| Disk Subsystem: | 73GB SCSI 10K RPM |
| Other Hardware: | |

### Software

| | |
|---|---|
| Operating System: | Windows Server 2003 Standard Edition |
| Compiler: | Intel C/C++ Compiler 8.1 (20050409)<br>Intel Fortran Compiler 8.1 (20050405Z)<br>Microsoft Visual Studio .NET 13.0.9466 (for libraries)<br>MicroQuill Smartheap Library 7.30 |
| File System: | NTFS |
| System State: | Default |

## Notes/Tuning Information

```
GENERAL
  ONESTEP=yes
  +FDO:   PASS1=-Qprof_gen  PASS2=-Qprof_use
PORTABILITY
  178.galgel:   -FI /F32000000
BASE TUNING
  C/F77/F90:    -fast -QxP -Qansi_alias     +FDO
PEAK TUNING
  168.wupwise:  basepeak=yes
  171.swim:     -fast -QxP -f77rtl +FDO
  172.mgrid:    basepeak=yes
  173.applu:    -fast -QxP -Qscalar_rep- -Qauto -f77rtl +FDO
  177.mesa:     basepeak=yes
  178.galgel:   basepeak=yes
  179.art:      basepeak=yes
  183.equake:   -fast -QxP -Oa -Qrcd +FDO shlW32M.lib
  187.facerec:  basepeak=yes
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation



## Notes/Tuning Information (Continued)

```
188.ammp:     basepeak=yes
189.lucas:    -fast -QxP
191.fma3d:    basepeak=yes
200.sixtrack: -QxP -Qipo +FDO
301.apsi:     -fast -QxP -f77rtl +FDO
```