CINT2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL580 G3 (3.333GHz, Intel Xeon)

SPECint_rate2000 = 17.5

SPECint_rate_base2000 = 17.4

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Jun-2005 | Hardware Avail: Jun-2005 | Software Avail: May-2005

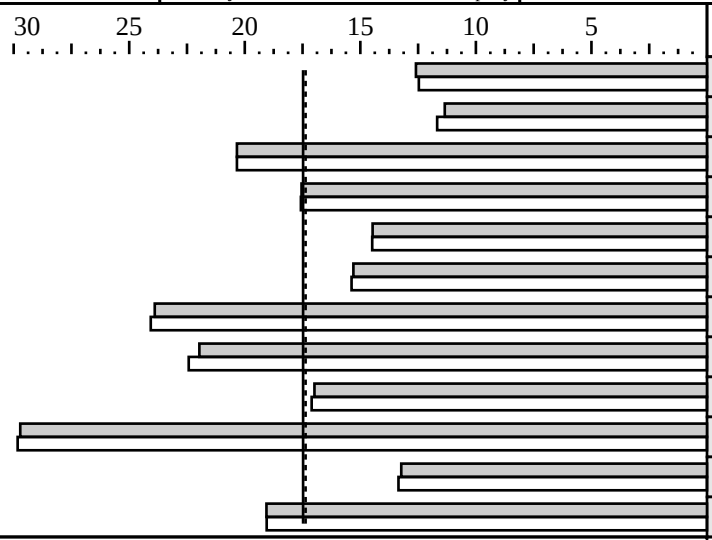

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
164.gzip	1	129	12.6	1	130	12.5
175.vpr	1	143	11.3	1	139	11.7
176.gcc	1	62.7	20.3	1	62.7	20.3
181.mcf	1	119	17.5	1	119	17.6
186.crafty	1	80.2	14.5	1	80.1	14.5
197.parser	1	136	15.3	1	136	15.4
252.eon	1	63.1	23.9	1	62.7	24.1
253.perlbmk	1	95.1	22.0	1	93.1	22.4
254.gap	1	75.1	17.0	1	74.6	17.1
255.vortex	1	74.2	29.7	1	73.9	29.8
256.bzip2	1	132	13.2	1	130	13.3
300.twolf	1	183	19.1	1	183	19.1

Hardware

CPU:	Intel Xeon MP (3.333GHz, 1MB L2, 8MB L3, 667MHz bus)
CPU MHz:	3333
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 1 core/chip (Hyper-Threading Technology disabled)
CPU(s) orderable:	1,2,4
Parallel:	No
Primary Cache:	12K micro-ops I + 16KBD on chip
Secondary Cache:	1024KB(I+D) on chip
L3 Cache:	8192KB
Other Cache:	N/A
Memory:	16x2048MB DDR2-400
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise (Build 3790)
Compiler:	Intel C++ Compiler for 32-bit applications, Version 8.1 Build 20050524Z Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use

Base tuning for C programs:   -fast        +FDO  ONESTEP=yes shlw32M.lib
Base tuning for C++ programs: -fast -Qcxx_features +FDO
Portability flags:
  176.gcc: -Dalloca=_alloca /F10000000
  186.crafty: -DNT_i386
  253.perlbmk: -DSPEC_CPU2000_NTOS -DPERLDLL /MT
  254.gap: -DSYS_HAS_CALLOC_PROTO -DSYS_HAS_MALLOC_PROTO
Peak tuning:
  164.gzip:            -fast               +FDO  ONESTEP=yes
  175.vpr:             -fast               +FDO  ONESTEP=yes
  176.gcc:             basepeak = 1
  181.mcf:             -fast               +FDO  ONESTEP=yes shlw32M.lib
  186.crafty:          -fast -Oa           +FDO  ONESTEP=yes shlw32M.lib
  197.parser:          -fast               +FDO  ONESTEP=yes
  252.eon:             -fast               +FDO
  253.perlbmk:         -fast -Oa           +FDO  ONESTEP=yes shlw32M.lib
  254.gap:             -fast               +FDO  ONESTEP=yes
  255.vortex:          -fast               +FDO  ONESTEP=yes shlw32M.lib
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    256.bzip2:           -fast -Oa -Qunroll1 +FDO  ONESTEP=yes shlw32M.lib
    300.twolf:           -fast               +FDO              shlw32M.lib
  BIOS Configuration Notes
    Hyper-Threading Technology disabled
```