CFP2000 Result

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Hewlett-Packard Company
ProLiant DL380 G4 (3.8GHz, Intel Xeon)

SPECfp_rate2000 = 32.9

SPECfp_rate_base2000 = 32.1

SPEC license #: 3 | Tested by: Hewlett-Packard Company | Test date: Aug-2005 | Hardware Avail: Sep-2005 | Software Avail: May-2005

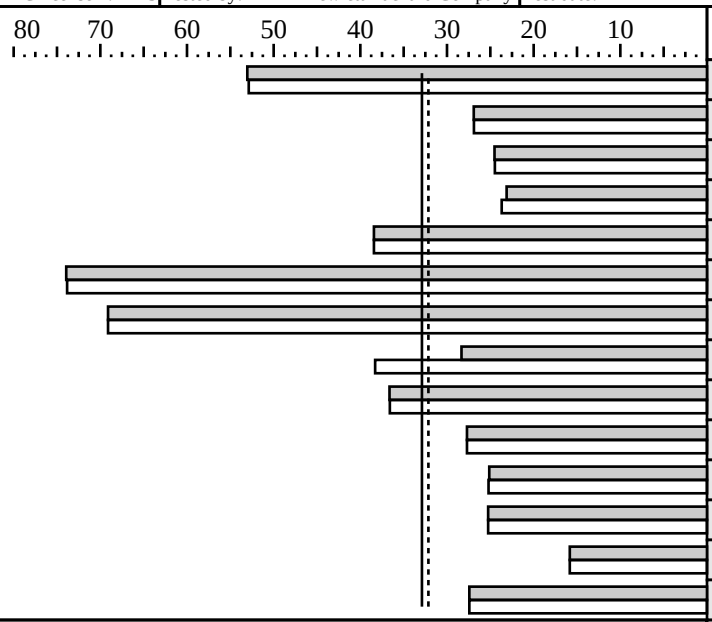

Benchmark	Base Copies	Base Runtime	Base Ratio	Copies	Runtime	Ratio
168.wupwise	2	70.0	53.0	2	70.2	52.9
171.swim	2	267	26.9	2	267	26.9
172.mgrid	2	170	24.5	2	171	24.5
173.applu	2	211	23.1	2	206	23.7
177.mesa	2	84.5	38.4	2	84.5	38.4
178.galgel	2	91.0	73.9	2	91.1	73.8
179.art	2	87.3	69.1	2	87.3	69.1
183.equake	2	106	28.3	2	78.8	38.3
187.facerec	2	120	36.6	2	120	36.6
188.ammp	2	184	27.7	2	184	27.7
189.lucas	2	185	25.1	2	184	25.2
191.fma3d	2	193	25.3	2	193	25.3
200.sixtrack	2	161	15.8	2	161	15.8
301.apsi	2	220	27.4	2	220	27.4

Hardware

CPU:	Intel Xeon (3.8GHz, 2MB L2, 800MHz bus)
CPU MHz:	3800
FPU:	Integrated
CPU(s) enabled:	2 cores, 2 chips, 1 core/chip (Hyper-Threading Technology disabled)
CPU(s) orderable:	1,2
Parallel:	No
Primary Cache:	12K micro-ops I + 16KBD on chip
Secondary Cache:	2048KB(I+D) on chip
L3 Cache:	N/A
Other Cache:	N/A
Memory:	4x2048MB PC2-3200 Dual Rank
Disk Subsystem:	1x36.4GB 15K Ultra320 SCSI
Other Hardware:	

Software

Operating System:	Windows Server 2003 Enterprise SP1
Compiler:	Intel C++ Compiler for 32-bit applications, (Version 8.1 Build 20050524Z) Intel Fortran Compiler for 32-bit applications, (Version 8.1 Build 20050517Z) Microsoft Visual Studio .NET 7.0.9466 (for libraries) MicroQuill Smartheap Library 7.0
File System:	NTFS
System State:	Default

Notes/Tuning Information

```
+FDO: PASS1=-Qprof_gen  PASS2=-Qprof_use


Base tuning:     -fast -Qansi_alias +FDO
Portability flags:
  178.galgel: -FI /F32000000
Peak tuning:
  168.wupwise:   -fast -Qansi_alias                    +FDO
  171.swim:      -fast                         -f77rtl +FDO ONESTEP=yes
  172.mgrid:     -fast -Qansi_alias                    +FDO
  173.applu:     -fast -Qscalar_rep- -Qauto -f77rtl +FDO ONESTEP=yes
  177.mesa:      -fast                                 +FDO ONESTEP=yes
  178.galgel:    -fast                                 +FDO ONESTEP=yes
  179.art:       basepeak=1
  183.equake:    -fast -Oa -Qrcd                       +FDO ONESTEP=yes shlw32M.lib
  187.facerec:   -fast -Qunroll1 -Qscalar_rep- -fpp +FDO ONESTEP=yes
  188.ammp:      basepeak=1
```

Copyright ©1999-2005, Standard Performance Evaluation Corporation

Notes/Tuning Information (Continued)

```
    189.lucas:      -fast
    191.fma3d:      basepeak=1
    200.sixtrack:   -fast                                   +FDO
    301.apsi:       basepeak=1
  BIOS Configuration Notes
    Hyper-Threading Technology disabled
```